

ASX ANNOUNCEMENT

2 September 2026

WHITE CLIFF
MINERALS

23m at 6.18% Cu Extends Ultra High-Grade Danvers 3 Copper Zone to Over 220m of Strike

Includes 3.90m at 16.45% Cu with a new Danvers peak assay of 23.5% Cu

White Cliff Minerals Limited (“WCN” or the “Company”) (ASX: **WCN**; OTCQB: **WCLMF**) is pleased to announce exceptional step-out assay results from the Danvers 3 discovery at the Company’s Rae Copper Project. Drillhole DAN26036 returned 23m @ 6.18% Cu and 13g/t Ag, including 3.90m @ 16.45% Cu and a peak assay of 23.5% Cu, while expanding the ultra-high-grade chalcocite breccia zone to more than 220m along strike. The mineralised zone remains open towards surface and depth, with a further 248m untested to the next drillhole to the southwest.

Exceptional Step-Out Expands Ultra High-Grade Danvers 3 Zone

- DAN26036 delivered 23m @ 6.18% Cu and 13g/t Ag from 161m, including:
 - 6.88m @ 8.60% Cu and 16g/t Ag from 165m;
 - 3.90m @ 16.45% Cu and 31g/t Ag from 175.4m, including 0.60m @ 23.50% Cu and 44g/t Ag from 175.4m; and
 - 0.65m @ 21.80% Cu and 43g/t Ag from 178.65m.
- New Danvers Record: Peak copper assay of 23.5% Cu is the highest assayed copper grade returned from the Danvers prospect to date.
- DAN26036 was collared 105m west of DAN26012, drilled away from the discovery area to test for extensions. Drilling intersected this new mineralised zone more than 220m along strike - materially expanding the high-grade chalcocite breccia trend. A further 248m of strike is untested to the next drillhole southwest, and mineralisation remains open towards surface and depth.

Clear Geological Vector Emerging at Danvers 3

- Oriented diamond core, assay results and magnetic data are converging on a consistent control: high-grade chalcocite mineralisation is concentrated within permeable crackle/mosaic breccias along the flanks of the Teshierpi Fault Zone. The association with a strong magnetic gradient provides a direct structural and geophysical vector for follow-up drilling.

The First Fast-Track Danvers 1 Infill Hole Intersects 42.19m of Copper Sulphides

- The first infill hole, DAN26047, intersected 42.19m of bornite-chalcocite dominant vein and breccia-hosted mineralisation between existing Danvers 1 drillholes, providing strong visual support for continuity of the high-grade system¹.

Troy Whittaker, Managing Director, commented “DAN26036 is exactly the type of result we want from step-out drilling. More than 220m from DAN26012, it has delivered 23m at 6.18% Cu, including 3.90m at 16.45% Cu and a new Danvers record assay of 23.5% Cu - Assays that demonstrate thick and high-grade continuity of the copper mineralisation. The high-grade zone remains open, with another 248m still untested towards the next drillhole in the southwest.

¹Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations. Full details regarding minerals observed, mineral form and abundance can be found in Table 1.

Importantly, we are now understanding why the high grades occur. The strongest chalcocite mineralisation is associated with permeable crackle/mosaic breccias along the flanks of the Teshierpi Fault Zone - that geometry is reflected in the magnetic data. This gives us a much sharper targeting vector. With strong mineralisation now being demonstrated across Danvers 1, 2, 3 and 4, we are seeing multiple high-grade centres emerging within a much larger copper system as we continue to drill aggressively, to define its scale."

DANVERS 3 - ASSAYS

- Drillhole DAN26036, targeting the northwestern fault contact of the regional Teshierpi Fault Zone has returned another exceptionally high-grade drill intercept from the Danvers 3 target.
- DAN26036 was collared 105m west of discovery hole DAN26012 and drilled away from the previous intercepts. Its high-grade intercept lies more than 220m along the interpreted mineralised trend from the DAN26012 intercept, extending the strike length of this high-grade chalcocite breccia zone to over 220m.
- DAN26036 delivered **23m @ 6.18% Cu and 13g/t Ag** from 161m including:
 - 6.88m @ 8.60% Cu and 16g/t Ag** from 165m;
 - 3.90m @ 16.45% Cu and 31g/t Ag** from 175.4m, including **0.60m @ 23.50% Cu and 44g/t Ag** from 175.4m;
 - 0.65m @ 21.80% Cu and 43g/t Ag** from 178.65m.

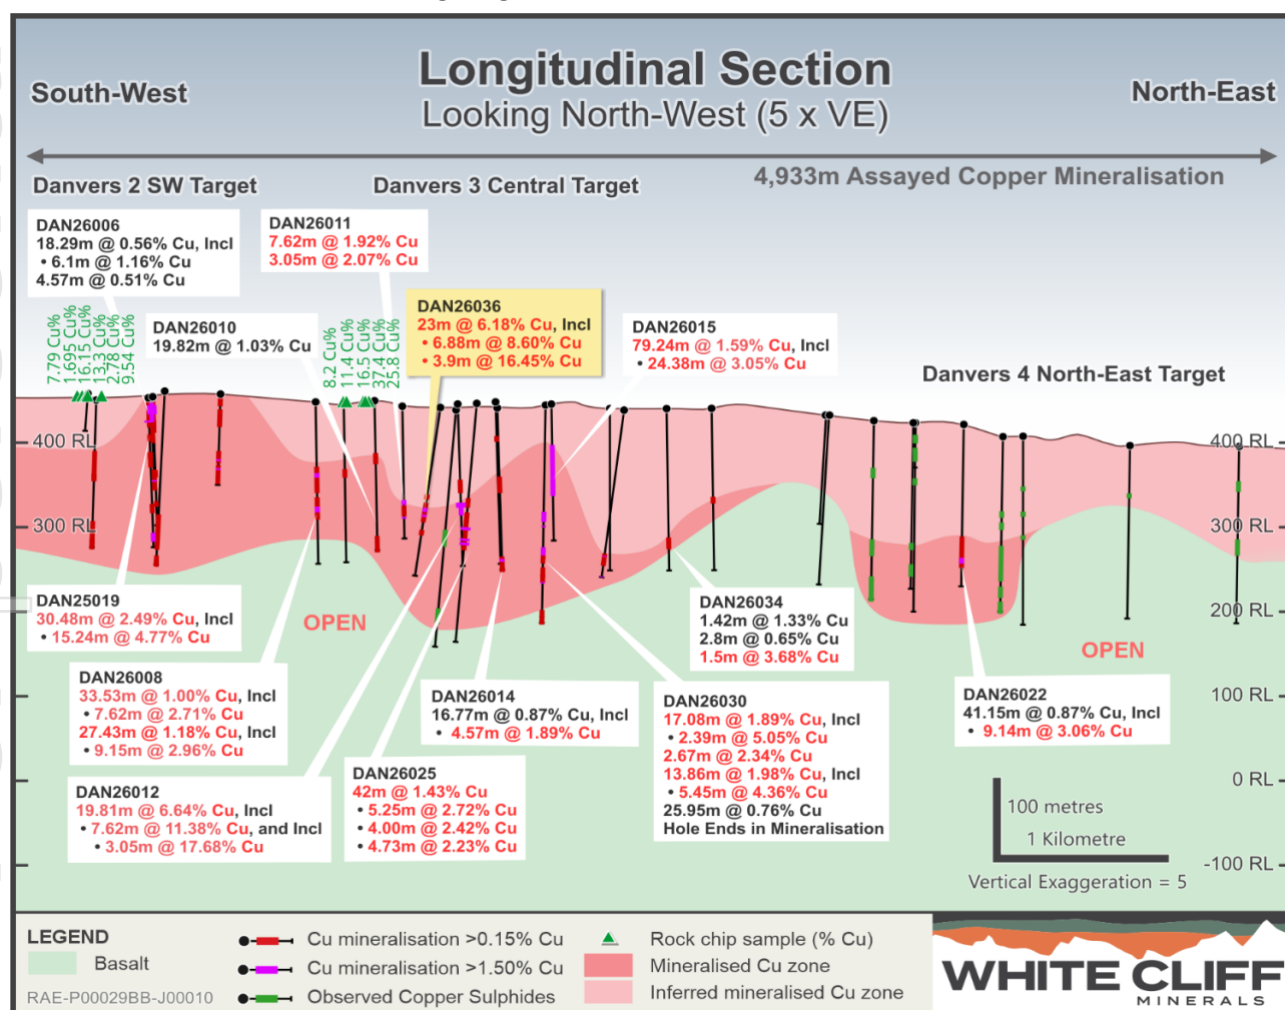


Figure 1 - Long section through the Teshierpi Fault Zone showing DAN26036 more than 220m along strike from DAN26012, the interpreted mineralised trend and the expanded high-grade chalcocite breccia trend and the 248m untested gap to the next drillhole southwest. This long section is shown through the plan view in Figure 2.

Table 1 - Grade Continuity Across the Step-Out Holes. See ASX announcement 10 June 2026 "Exceptional-Grade Copper Discovery at Danvers"

	DAN26012	DAN26036
	Discovery Hole	Step-Out Hole
ASX Announcement	10 June 2026	2 September 2026
Interval	19.81m from 152.4m	23.00m from 161.0m
Average Cu Grade	6.64% Cu	6.18% Cu
Grade Thickness	132 %Cu-m	142 %Cu-m
High Grade Core	7.62m @ 11.38% Cu	3.90m @ 16.45% Cu
Peak Sample	1.52m @ 21.10% Cu	0.60m @ 23.50% Cu

- A 248m gap remains between DAN26036 and the next drillhole to the southwest. With the high-grade breccia mineralisation also open towards surface and depth, Danvers 3 retains substantial immediate expansion potential.

DANVERS 3 - GEOLOGY

- Danvers 3 was discovered during widely spaced spring 2026 RC drilling along the northwestern edge of the Teshierpi Fault Zone, where chalcocite was identified as the dominant copper sulphide and established the area as a priority follow-up target.
- Diamond scissor hole DAN26025 showed that the high-grade mineralisation is hosted by chalcocite-cemented breccia, with copper sulphides occupying space between breccia clasts. This geometry provides a clear mechanism for the development of exceptionally high copper grades.
- Oriented core observations now show a key contrast across the Teshierpi structure. The mineralised flank is characterised by crackle/mosaic breccia with limited clast rotation and breakdown, preserving permeability and open space for later copper-bearing fluids. This contrasts with the more intensely worked, matrix-rich breccia in the centre of the fault zone.
- The emerging interpretation is that the highest-grade chalcocite mineralisation preferentially develops along the more permeable margins of the Teshierpi Fault Zone rather than within its less permeable core.
- Critically, these mineralised breccia margins are associated with a strong magnetic gradient, allowing structural observations from oriented core to be integrated directly with the magnetic dataset. This provides a repeatable exploration vector for targeting extensions at Danvers 3 and elsewhere along the broader fault system.
- The combination of structure, breccia texture, sulphide mineralogy and geophysics materially improves the Company's ability to target the high-grade parts of the system as drilling progresses.

DANVERS 1 - BROAD BORNITE-CHALCOCITE MINERALISATION IN INFILL HOLE

- DAN26047 was collared between 2025 drillholes DAN25007 and DAN25012 to reduce drill spacing through the high-grade Danvers 1 breccia system and improve understanding of the plunge and internal grade controls.
- As only the second diamond drillhole completed into Danvers 1, DAN26047 provides valuable oriented structural data and specific gravity measurements to support refinement of the geological model and future modelling.
- DAN26047 intersected 42.19m of bornite-chalcocite dominant vein and breccia-hosted copper sulphides between existing drillholes, providing strong visual support for continuity of the mineralised system. Assays are pending and due in 4-6 weeks.
- Three additional diamond drillholes are planned into the Danvers 1 core breccia zone to test down-dip and plunge extensions in areas of limited historic drill coverage.

DANVERS 4 - COPPER MINERALISATION EXTENDS TOWARDS DANVERS 1

- DAN26044 intersected a total of 31.43m of chalcocite and bornite mineralisation, including disseminated sulphides through basalt units, 365m northwest of Danvers 1. Assays are pending.
- As drilling advances through Danvers 4, copper sulphides are being observed along the southeastern contact of the main Teshierpi Fault Zone. In places this contact is approximately 200m from the surface projection of mineralisation at Danvers 1, raising the possibility that the two mineralised zones may be structurally connected.
- A further three drillholes have been completed in the Danvers 4 target area within the main Teshierpi Fault Zone north of Danvers 1, with assays pending.
- The occurrence of both chalcocite and bornite in DAN26044 adds further evidence of a fertile copper system between the main Teshierpi structure and the southeastern splay hosting Danvers 1.
- Further drilling will directly test whether mineralisation along the main Teshierpi Fault Zone links with the Danvers 1 splay, a potentially important control on the scale and geometry of the broader Danvers system.

AGGRESSIVE FOLLOW-UP DRILLING CONTINUES

- Three additional diamond holes are planned through the Danvers 1 core breccia zone to test down-dip and plunge extensions of the high-grade mineralisation.
- Following completion of the Danvers 1 infill program, the rig will move northeast to systematically test continuity between the currently wide-spaced drillholes that have returned copper mineralisation.

Further step-out drilling at Danvers 2 and Danvers 3 will target large gaps of more than 500m between existing mineralised drillholes, providing multiple opportunities to materially expand the known copper footprint.

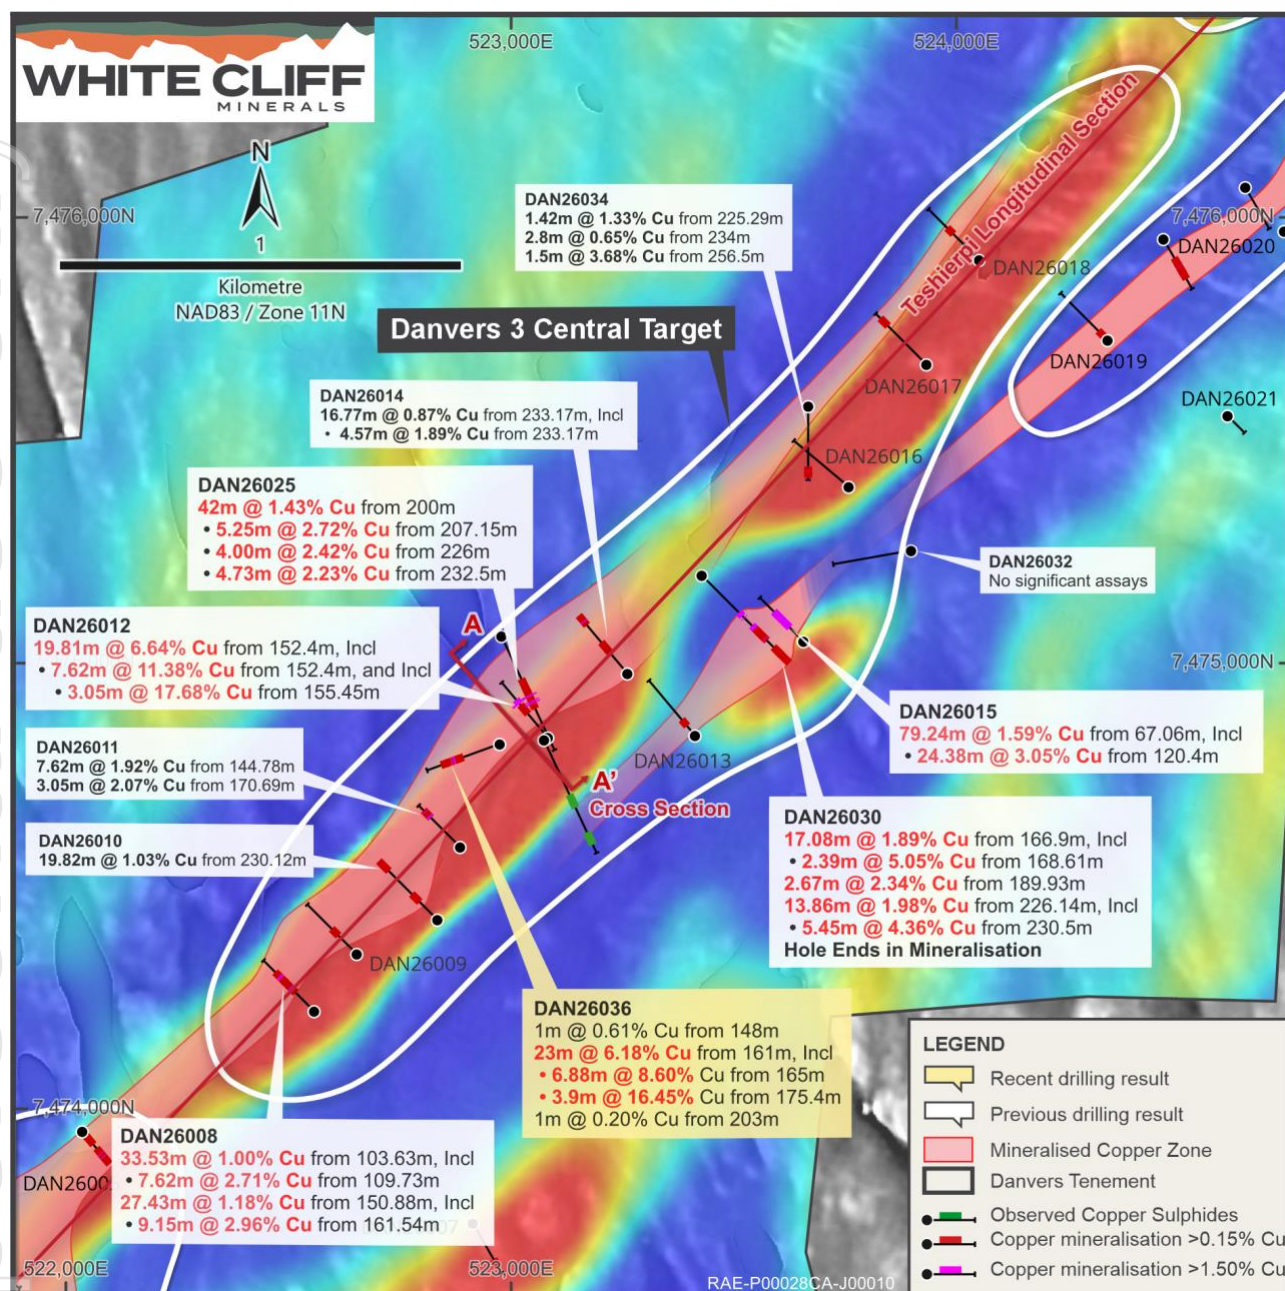


Figure 2 - Plan map of 2026 drilling across the Teshierpi Fault Zone and Danvers 3 target, showing the interpreted mineralised trend, the location of the Danvers 3 long section in Figure 1. Basemap shows the X component of the 2025 EM survey.

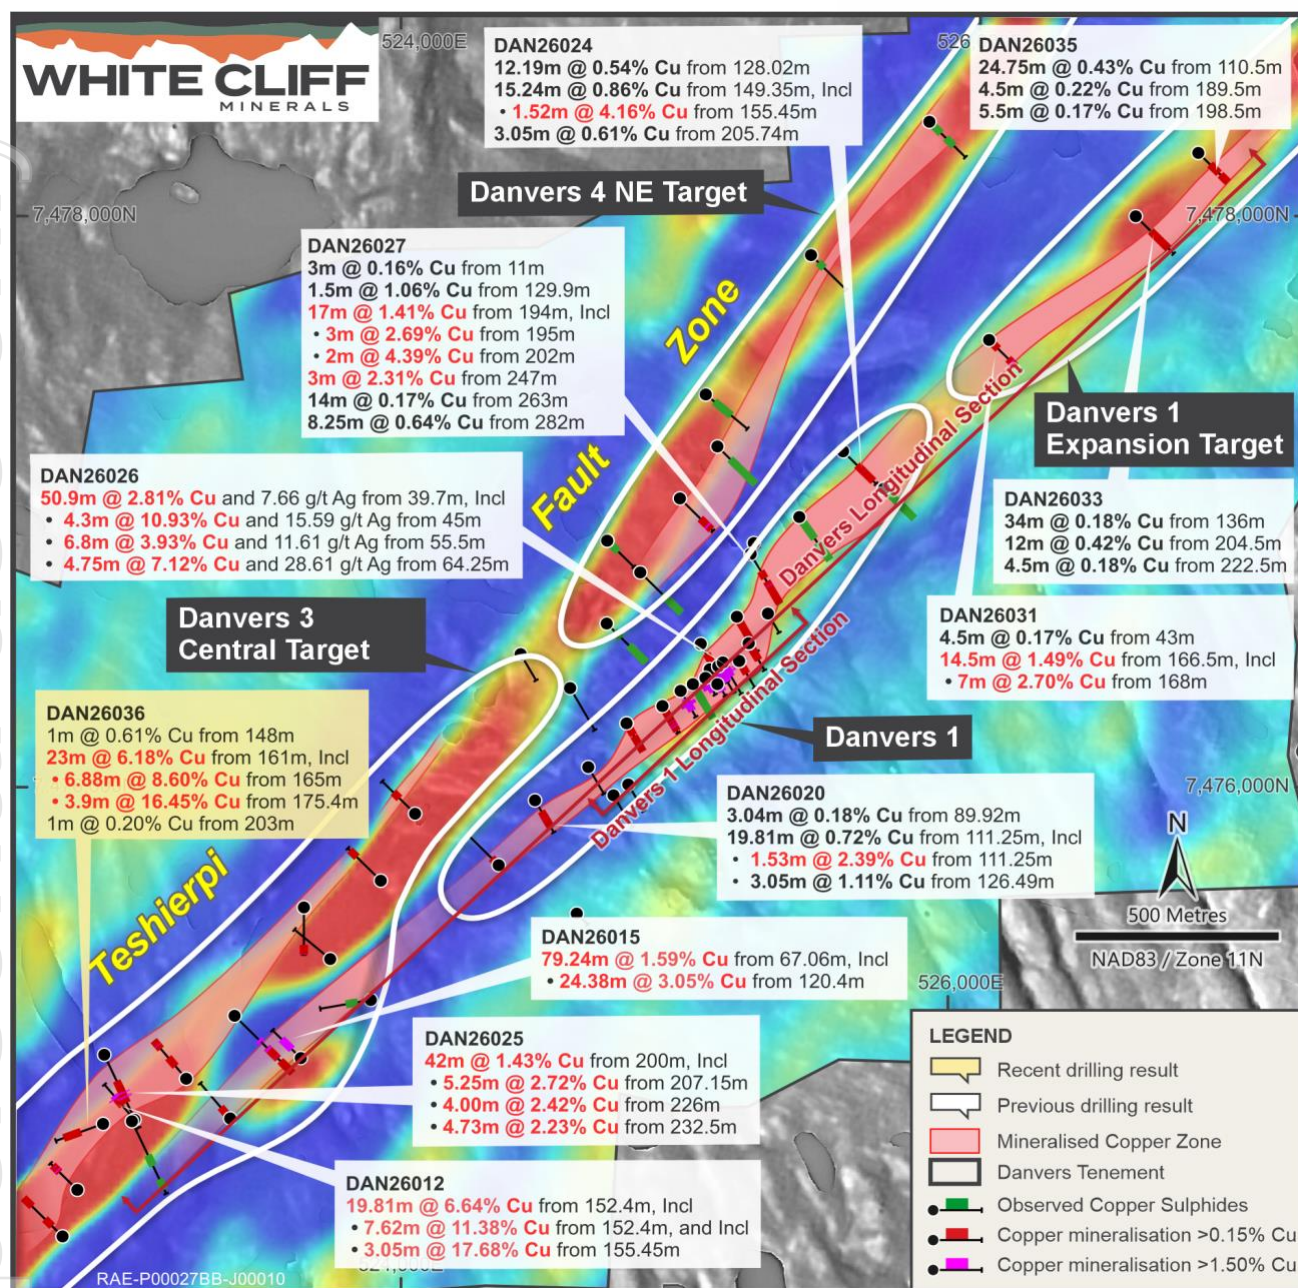


Figure 3 - Plan map of Danvers 1, the Danvers 1 northeast extension and Danvers 4, highlighting recently completed drilling and copper sulphide observations in DAN26044 and DAN26047. The broader Danvers 1 long section is shown in Figure 4 and the detailed core-zone long section is shown in Figure 5.

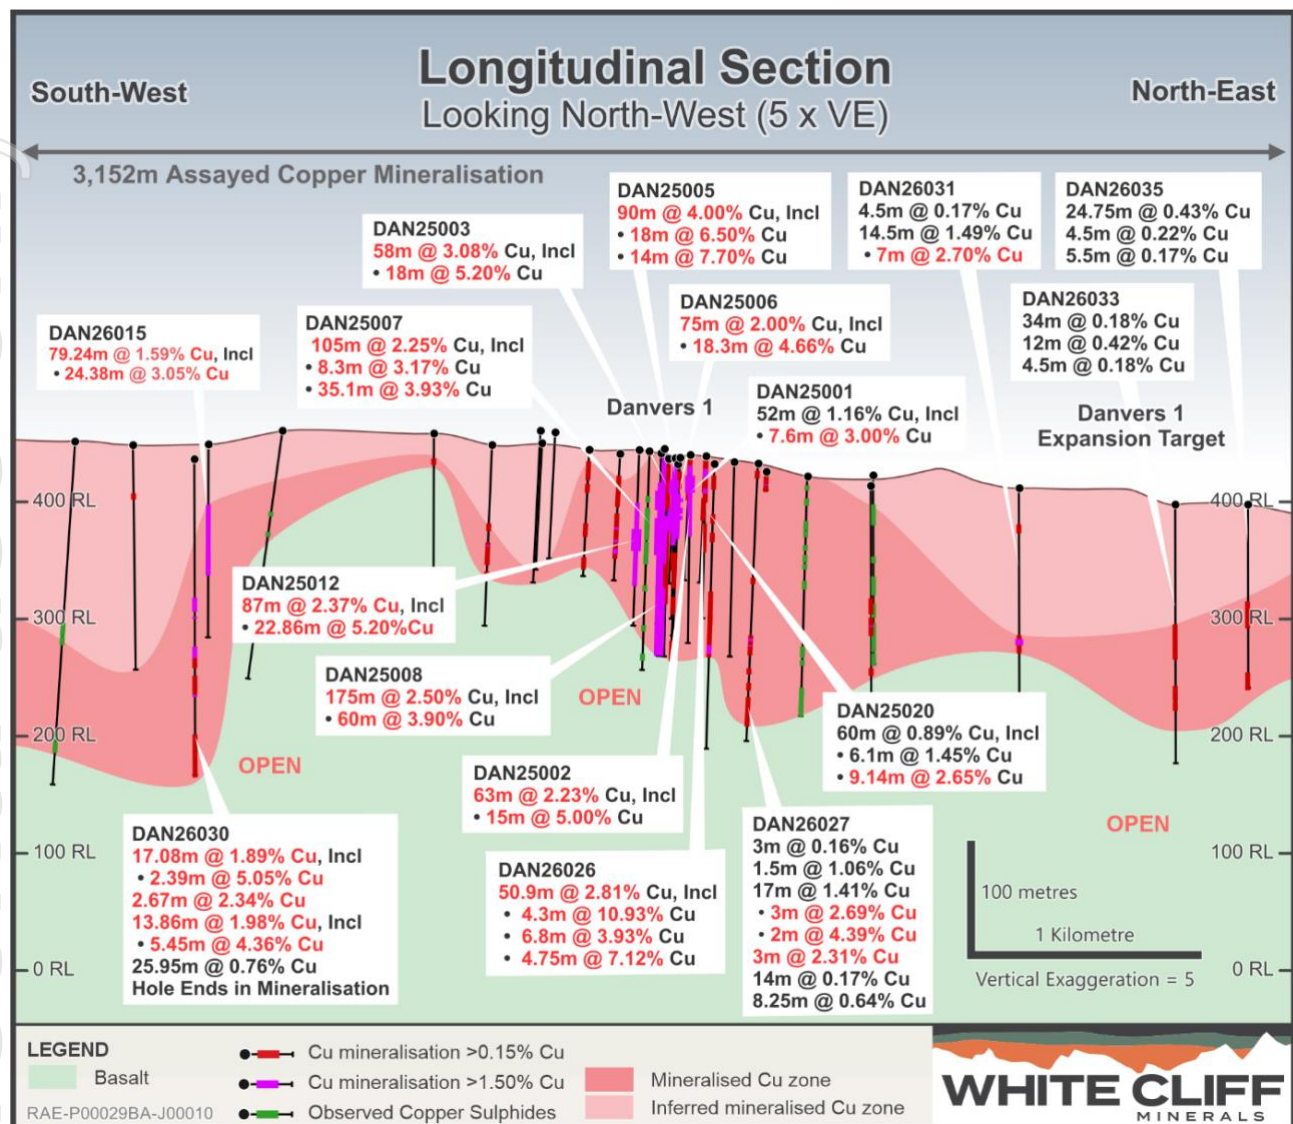


Figure 4 - Long section through Danvers 1 and its northeast and southwest extensions, showing DAN26047 infilling the high-grade core zone between existing drilling and the areas targeted by ongoing expansion drilling.

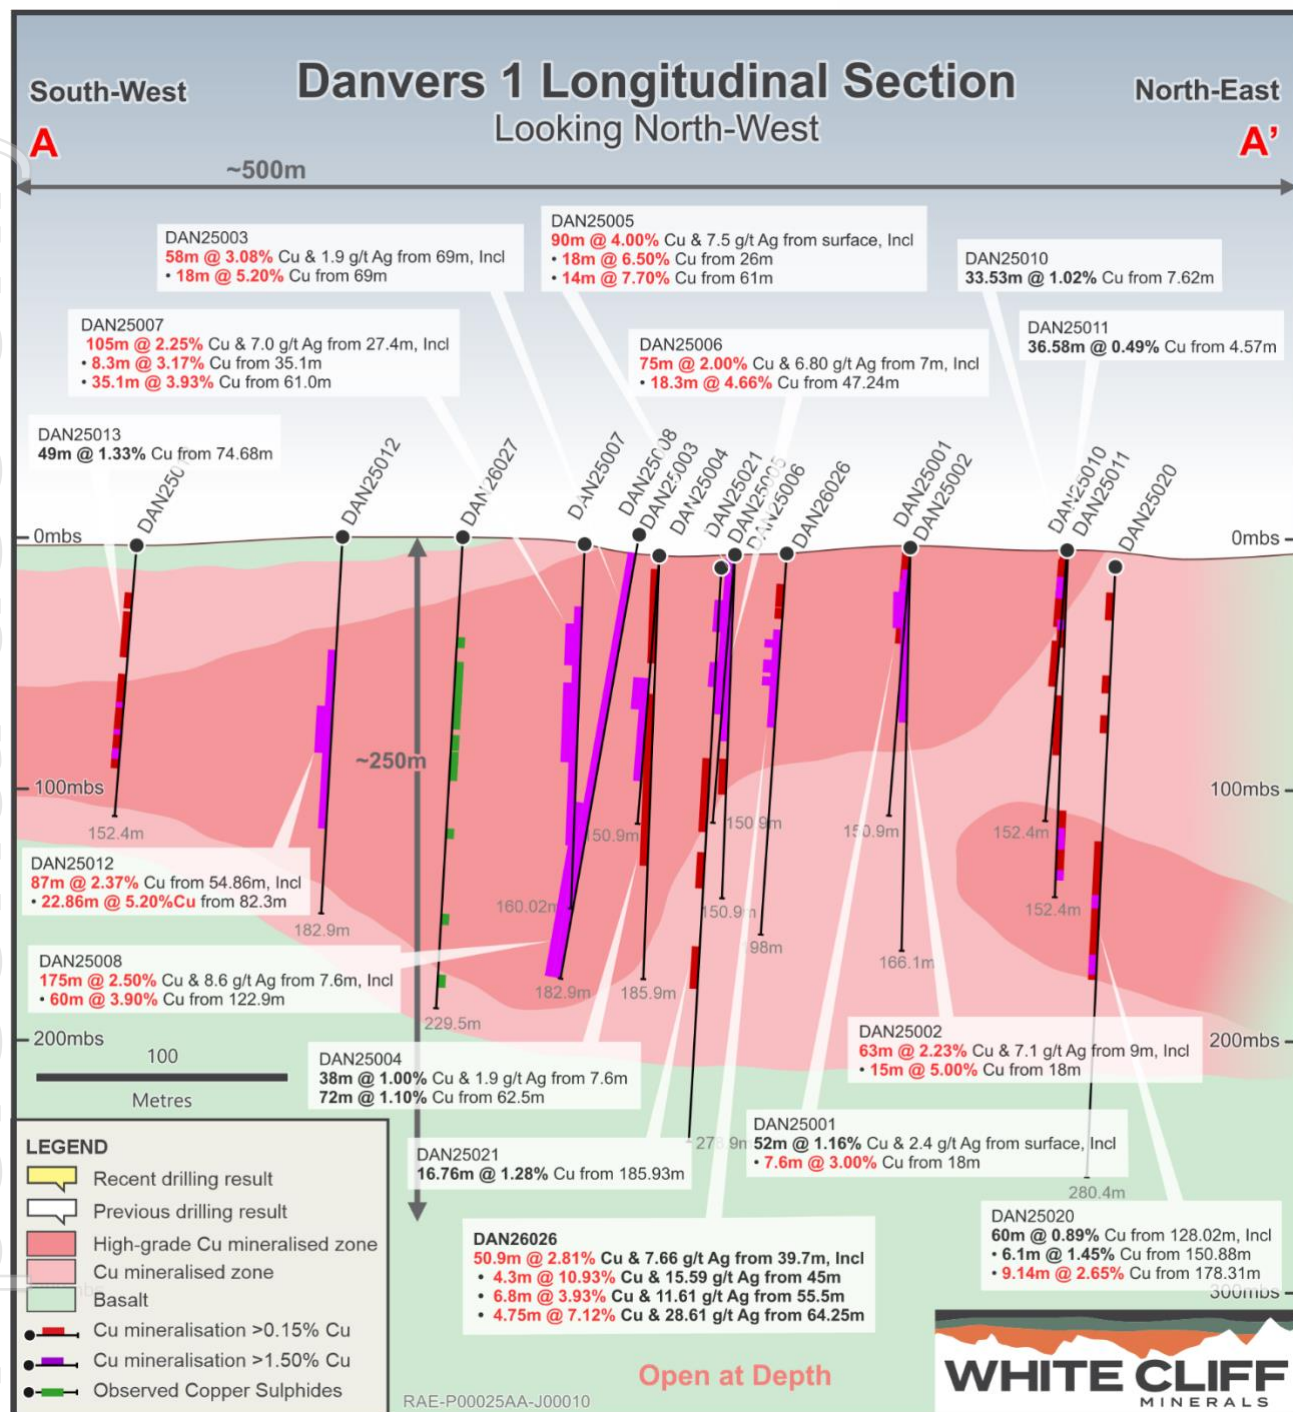




Figure 6 - Labelled photograph of key mineralised interval in drillhole DAN26036. Photograph from 170.64m to 178.90m. Sample intervals are labelled with the returned copper assay result, including up to 0.6m @ 23.5% Cu, 0.65m @ 21.8% Cu and 1.0m @ 16.85% Cu.



Figure 7 - Photograph of NQ2 diameter drill core displaying coarse grained chalcocite mineralisation from between 175.4 and 179.3m in drillhole DAN26036.

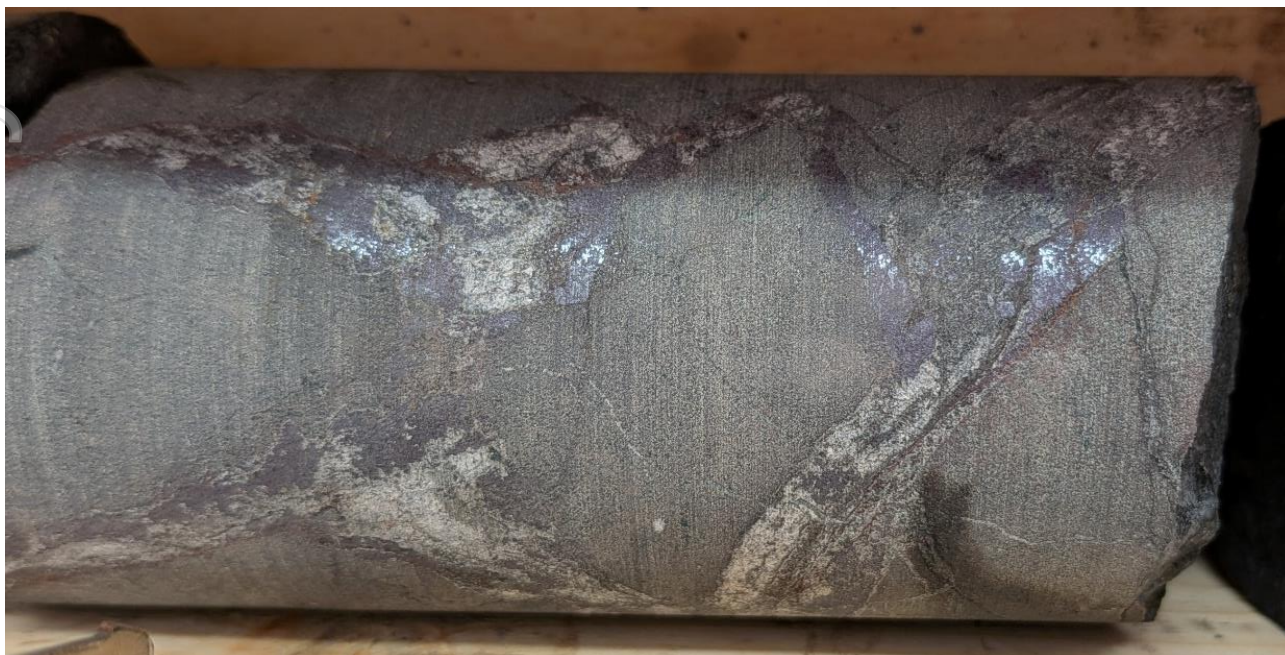


Figure 8 - Photograph of vein and breccia cement hosted chalcocite mineralisation that characterises the sulphides between 76m and 80m in DAN26047. Drill core is NQ2 diameter.



Figure 9 - Photograph of vein and breccia cement hosted chalcocite mineralisation that characterises the sulphides at 81m in DAN26047. Yellow dashed circles outline the bornite and chalcocite mineralisation. Drill core is NQ2 diameter.

This announcement has been approved by the Board of White Cliff Minerals Limited.

For further information, please contact:

Troy Whittaker | Managing Director
troy@wcminerals.com.au
 +61 8 9486 4036

Harry Spillane | Investor Relations
harry@blackwateradvisors.com.au
 +61 447 757 550

ABOUT WHITE CLIFF MINERALS



Defining a large-scale copper opportunity in one of the world's leading mining jurisdictions

DANVERS

Danvers - a high-grade vein hosted copper deposit cornerstones the foundations of the broader Rae Project potential. Highlights from the maiden drilling campaign point to a major copper discovery and include **175m @ 2.5% Cu & 8.66g/t Ag, 90m @ 4% Cu & 7.5g/t Ag, 58m @ 3.08% Cu & 13.3g/t Ag, 105m @ 2.25% Cu, 63m @ 2.23% Cu and 75m @ 2% Cu**. Adding to the scale, regional step-outs at Danvers 2 with over 5km down-strike returning **15m @ 4.8% Cu**, and at Danvers 3, **20m @ 6.64% Cu, 23m @ 6.18% Cu and 79.24m @ 1.59% Cu**, with further 2026 drilling clearly demonstrating the emergence of a large copper system.

RAE SEDIMENT-HOSTED COPPER DEPOSIT

A sediment-hosted copper deposit, with drill holes STK25001 and STK25003 confirming the presence of sedimentary-hosted copper at Hulk. Mineralisation is developed along the Rae Group–Husky Creek Formation contact, a regional redox boundary and unconformity confirmed as the primary control on copper, hosting a laterally extensive, sheet-like horizon typically 2–30m thick. Copper sulphides occur predominantly as chalcopyrite cement and veinlets within the basal Rae Group conglomerates, directly along the unconformity, validating the Company's geological model. 2025 drilling returned **3.5m @ 7.2% Cu and 25m @ 0.6% Cu**, and 2026 diamond drilling has intersected **visible chalcopyrite** at the target horizon in all three holes completed, extending mineralisation **3.7km east** of 2025-hole STK25004 and expanding the interpreted footprint to approximately **6.3km²**, pointing to a district-scale system. Drilling is now vectoring toward the core of the system, targeting stronger alteration and higher-grade, bornite-rich mineralisation, with further EM-defined conductivity anomalies still to be tested.



COMPETENT PERSONS STATEMENT

The information in this announcement that relates to Exploration Results is based on information compiled by Mr Eric Sondergaard, who is a member of the Association of Professional Engineers and Geoscientists of Alberta and the Northwest Territories and Nunavut Association of Professional Engineers and Geoscientists. Mr Sondergaard is an employee of White Cliff Minerals Limited. Mr Sondergaard has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration, and to

the activity being undertaken, to qualify as a Competent Person as defined in the 2012 edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Sondergaard consents to the inclusion in this announcement of the matters based on his information in the form and context in which they appear.

JORC COMPLIANCE STATEMENT

Where this announcement refers to Exploration Results that have previously been reported, the Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcements.

CAUTION REGARDING FORWARD-LOOKING STATEMENTS

This announcement may contain forward-looking statements concerning White Cliff Minerals Limited. Forward-looking statements are not statements of historical fact and actual events and results may differ materially from those described in the forward-looking statements because of a variety of risks, uncertainties and other factors. Forward-looking statements are inherently subject to business, economic, competitive, political and social uncertainties and contingencies. Many factors could cause the Company's actual results to differ materially from those expressed or implied by any forward-looking statements.

Forward-looking statements in this announcement are based on the Company's beliefs, opinions and estimates as at the date the statements are made. The Company does not undertake to update any forward-looking statements if those beliefs, opinions or estimates change, or to reflect future developments, except as required by law.

APPENDIX A.

The following Tables are provided to ensure compliance with the JORC Code (2012 Edition) requirements for the reporting of Exploration Results at the Rae Copper Project.

Table 1 - Table of copper sulphide observations. Abbreviations: Cc – chalcocite, Cp – chalcopyrite. Table summarises logged intervals in diamond drillholes DAN26044, DAN26045, DAN26046, DAN26047. The style of sulphide mineralisation and visual % estimate is recorded. Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations. The reported intervals represent down hole length, true width not known. (Bn – Bornite, Cc – Chalcocite, Cp – chalcopyrite, Amy – amygdale fill, Dis – disseminated, Vnl – veinlet, Blb – bleb, Rep – replacement, Fra – fracture, Ven – vein, Vpl – vein parallel, Pat – patchy, Nod – nodular, Sel – selective, Vst – stringer veins, Bcm – breccia cement, vsl – vein selvage.

Hole number	From	To	Interval (m)	Bn (%)	Bn Style	Cc (%)	Cc Style	Cp (%)	Cp Style
DAN26047	51	52.5	1.5					0.1	blb
DAN26047	63	64.6	1.6			0.1	blb		
DAN26047	64.6	67.21	2.61	1	bcm				
DAN26047	67.21	70.4	3.19	1	ven				
DAN26047	72	75	3			2	fra		
DAN26047	76	80	4	3	ven				
DAN26047	80	83.02	3.02			1	ven		
DAN26047	83.02	89.89	6.87	2	bcm				
DAN26047	89.89	92	2.11	2	dis				
DAN26047	98.6	102.33	3.73	0.1	fra				
DAN26047	106.7	109.2	2.5	1	fra				
DAN26047	111	112.42	1.42	1	dis	0.1	ven	1	ven
DAN26047	115.54	117	1.46			1	ven		
DAN26047	144	145.18	1.18					0.1	ven
DAN26047	185.5	187	1.5					0.1	fra
DAN26047	215	217.5	2.5			0.1	bcm		
DAN26044	79.5	88.5	9					0.1	dis
DAN26044	190	191	1	1	blb				
DAN26044	197	198	1						
DAN26044	200	209	9						
DAN26044	247	248	1	1	blb				amy
DAN26044	250	250.4	0.4			1	fra		
DAN26044	256	256.5	0.5			1	blb		
DAN26044	259	261	2			0.1	dis		
DAN26044	264.67	265	0.33			2	dis		
DAN26044	266	267	1			1	dis		
DAN26044	268	271	3			1	blb		
DAN26044	274	274.3	0.3			1	dis		
DAN26044	275	275.5	0.5			1	fra		
DAN26044	276	278.1	2.1			1	dis		
DAN26044	278.7	279	0.3			1	blb		
DAN26045	No copper sulphides observed								
DAN26046	No copper sulphides observed								

Table 2 - Collar location details for reported drillholes. Coordinates in NAD83 UTM Zone 11N. Collar locations determined by Juniper systems GNS2M geode. (RC – reverse circulation, DD – diamond drillhole)

Hole Number	Easting	Northing	Elevation	Azimuth	Dip	Depth (m)	Hole Type
DAN26036	522974	7474818	450	250	-50	270	DD
DAN26044	524700	7476566	431	135	-50	279	DD
DAN26045	524585	7476342	435	150	-50	264	DD
DAN26046	524411	7476456	433	150	-50	165.3	DD
DAN26047	525009	7476358	445	150	-55	229.5	DD

Table 3: Assay data for diamond drill hole DAN26036. Sample intervals were selected according to lithological, alteration and mineralisation boundaries.”

Hole ID	From (m)	To (m)	Cu (ppm)
DAN26036	51.54	52.54	140
DAN26036	52.54	53	86
DAN26036	53	54.5	40
DAN26036	54.5	56	22
DAN26036	56	57.5	85
DAN26036	57.5	59	48
DAN26036	59	60.5	16
DAN26036	60.5	62	13
DAN26036	62	63.5	12
DAN26036	63.5	65	16
DAN26036	65	66.5	12
DAN26036	66.5	68	24
DAN26036	68	69.78	29
DAN26036	69.78	71.5	48
DAN26036	71.5	72	52
DAN26036	72	73.5	38
DAN26036	73.5	75	53
DAN26036	75	76	60
DAN26036	76	77	42
DAN26036	77	78.5	20
DAN26036	78.5	80	16
DAN26036	80	81.5	19
DAN26036	81.5	83	33
DAN26036	83	84.15	124
DAN26036	84.15	86.2	46
DAN26036	86.2	88.2	60
DAN26036	88.2	90	31
DAN26036	103	104	40
DAN26036	104	105	41
DAN26036	105	106	56
DAN26036	106	107	74
DAN26036	107	108	76
DAN26036	138.54	140	41
DAN26036	140	141.5	34
DAN26036	141.5	143	22

Hole ID	From (m)	To (m)	Cu (ppm)
DAN26036	143	144.5	52
DAN26036	144.5	146	91
DAN26036	146	147	210
DAN26036	147	148	691
DAN26036	148	149	6090
DAN26036	149	150	989
DAN26036	150	151	567
DAN26036	151	152	271
DAN26036	152	152.88	42
DAN26036	152.88	154	185
DAN26036	154	155	209
DAN26036	155	156	66
DAN26036	156	157	85
DAN26036	157	158	58
DAN26036	158	159	302
DAN26036	159	160	298
DAN26036	160	161	273
DAN26036	161	162	1495
DAN26036	162	163	5970
DAN26036	163	164	2970
DAN26036	164	165	5060
DAN26036	165	165.85	21600
DAN26036	165.85	167	142000
DAN26036	167	168	69800
DAN26036	168	169	96100
DAN26036	169	170	120500
DAN26036	170	171	70500
DAN26036	171	171.88	60500
DAN26036	171.88	173	17850
DAN26036	173	174	20900
DAN26036	174	174.7	14650
DAN26036	174.7	175.4	9690
DAN26036	175.4	176	235000
DAN26036	176	177	168500
DAN26036	177	178	120000

ASX ANNOUNCEMENT

Hole ID	From (m)	To (m)	Cu (ppm)
DAN26036	178	178.65	108500
DAN26036	178.65	179.3	218000
DAN26036	179.3	180	21300
DAN26036	180	181	36700
DAN26036	181	182	53500
DAN26036	182	183	8510
DAN26036	183	184	1580
DAN26036	184	185	69
DAN26036	185	186	146
DAN26036	186	187	82
DAN26036	187	188	179
DAN26036	188	189	40
DAN26036	189	190	46
DAN26036	190	191	106
DAN26036	191	192	63
DAN26036	192	193	41
DAN26036	193	194	38
DAN26036	194	195	36
DAN26036	195	196	522
DAN26036	196	197	51
DAN26036	197	198	635
DAN26036	198	199	485
DAN26036	199	200	23
DAN26036	200	201	31
DAN26036	201	202	89
DAN26036	202	203	45
DAN26036	203	204	2020
DAN26036	204	205	167
DAN26036	205	206.4	51
DAN26036	206.4	208	82
DAN26036	208	209.5	64
DAN26036	209.5	211	109
DAN26036	232.3	233.8	101
DAN26036	233.8	234.99	170
DAN26036	234.99	236	335
DAN26036	236	237	435
DAN26036	237	238	309
DAN26036	238	238.7	285
DAN26036	238.7	239.4	429
DAN26036	239.4	240	160
DAN26036	240	241	215
DAN26036	241	242	411
DAN26036	242	243	162
DAN26036	243	243.89	140
DAN26036	243.89	244.71	71

Hole ID	From (m)	To (m)	Cu (ppm)
DAN26036	244.71	246	112
DAN26036	246	247	84
DAN26036	247	248	53
DAN26036	248	249	37
DAN26036	249	250	620
DAN26036	250	251	358
DAN26036	251	252	166
DAN26036	252	253	238
DAN26036	253	254	157
DAN26036	254	255	166
DAN26036	255	256	269
DAN26036	256	257	191
DAN26036	257	258	216
DAN26036	258	259	239
DAN26036	259	260	240
DAN26036	260	260.68	225
DAN26036	260.68	262	235
DAN26036	262	263	125
DAN26036	263	264.15	60
DAN26036	264.15	265	97
DAN26036	265	266	105
DAN26036	266	267	57
DAN26036	267	268	46
DAN26036	268	269	59
DAN26036	269	270	100

APPENDIX B.

The following Tables are provided to ensure compliance with the JORC Code (2012 Edition) requirements for the reporting of Exploration Results at the Rae Copper Project.

SECTION 1: SAMPLING TECHNIQUES AND DATA

(Criteria in this section applies to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Sampling techniques	Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g., 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information.	2025/2026 Reverse circulation (RC) drilling by White Cliff Minerals. Drilling completed by Northspan Explorations Ltd. The drillholes were sampled in their entirety on 5-foot (1.52m) intervals. Returned material was passed through a level 3-tier riffle splitter, producing a 12.5% sample split and a retention sample. Representative chips for logging were taken from the retention sample by sieving from the retention sample. Chips are washed at the camp location, prior to storage in chip trays. 2025/2026 RC drilling by White Cliff Minerals – Samples are sent to ALS Yellowknife for preparation under code PREP-31B, which entails crushing to 70% less than 2mm, riffle splitting 1kg, with the split pulverised to better than 85% passing 75 microns. Spring drilling (DAN25001-008) used multi-element ICP-MS analysis after 4-acid digestion (ME-MS61) and fire assay gold (Au-ICP21). Summer RC drilling (DAN25009-021) used ICP-AES after 4-acid digestion (ME-ICP61) with no gold analysis. 4-acid digestion is considered a near-total digestion except for barite, rare earth oxides, columbite-tantalite, and titanium, tin and tungsten minerals, which may not be fully digested. Overassay completed by OG-62 methods. 2025/2026 diamond drilling (DD) by White Cliff Minerals. Drilling was completed by Northtech Drilling Ltd and Azrock Drilling. Core was sampled after geological logging and sample interval markup by the logging geologist. A standard maximum interval of 1.5m was employed with sample intervals breaking at changes in lithology, alteration or mineralisation and a minimum of 0.3m. Half core or quarter core (duplicates) were produced for assay samples using a diamond saw. 2025/2026 diamond drilling (DD) by White Cliff Minerals – Samples are sent to ALS Yellowknife for preparation under code PREP-31B, which entails crushing to 70% less than 2mm, riffle splitting 1kg, with the split pulverised to better than 85% passing 75 microns. Followed by multi-element ICP-AES analysis after 4-acid digestion (ME-ICP61). 2024 rock chip samples from the Nunavut based Rae Copper Project were sent to Yellowknife via secure air freight, and received by an employee of Aurora Geosciences Ltd., who ensured sample security and maintained custody until delivered to ALS laboratories, Yellowknife for preparation. Samples are prepared under code PREP-31D and analysed by ME-ICPORE, an analysis package designed for massive sulphides. Overassay (>40% Cu) are undertaken by Cu-VOL61. Samples with visible native copper were analysed by Cu-SCR21. All samples from Danvers target area underwent gold analysis by 30g fire assay and ICP-AES under code Au-ICP21, samples from Hulk undergo the same process however, without Au-ICP21. Final assay results and certificates are sent by ALS directly to both the WCN senior geologist and country manager to undertake independent quality control before release of results. 2025 rock chip samples from the Nunavut based Rae Copper Project will be shipped to Yellowknife via secure air freight, and received by an employee of Aurora Geosciences Ltd., who ensures sample security and maintains custody until delivered to ALS laboratories, Yellowknife for preparation. Samples will be prepared under code PREP-31B, which entails

		crushing to 70% less than 2mm, riffle splitting 1kg, with the split pulverised to better than 85% passing 75 microns. Followed by multi-element ICP-MS analysis after 4-acid digestion (ME-MS61) and fire assay gold (Au-ICP21). Historic drilling completed by Kaizen Discovery Corp. Diamond drillhole CP15-DD009, half core samples were sent to ALS Minerals preparatory lab in Yellowknife, N.T., followed by secure transport to and multi element assay at ALS's laboratory in North Vancouver, B.C. Analytical procedures consisted of 33 Element Four Acid ICP-AES, followed by automatic Ore Grade Four Acid ICP-AES for all copper over limits. 2003/2005 diamond drilling completed by Coronation Minerals produced half core samples which were flown to Loring Laboratories Inc. of Calgary for assay in the 2005 campaign, 2003 samples were sent to ALS Chemex (Vancouver). The entire sample was crushed to 2mm using a primary jaw and secondary cone crusher. The sample was homogenized and a split of 250-350 grams is taken and pulverized using a TM ring and puck pulveriser to 95 % -150 mesh. The pulp is then rolled 100 times to ensure complete homogenization placed in a sample bag ready for analysis. 0.5 g was digested by HCl, HNO3 and HClO4 and analysed for copper and nickel by ICP. Silver was analysed after HNO3 and HCl digestion followed by atomic absorption, with samples greater than 30 ppm silver re-analysed with fire assay with gravimetric finish. Gold and PGMs were analysed by a 30 g split by fire assay followed by ICP analysis. 1967/1968 diamond drilling completed by Coppermine River - Relating to 1967/1968 diamond drilling, half core samples were taken assaying was initially conducted by Federal Laboratories in Yellowknife with check assaying by Crest Laboratories in Edmonton, however the latter lab was eventually used due to faster turnaround times. Technical Service Laboratories of Toronto ran check assays on samples run by Crest. In 1968 assaying was completed by Crest Laboratories personnel at a facility constructed at the Hope Lake camp. Analysis for copper and silver was conducted, with multi-element analysis completed during metallurgical test work completed by Lakefield Research on 5 select composite samples of fine rejects from drill core samples.
Drilling techniques	Drill type (e.g., core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic etc.) and details (e.g., core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is orientated and if so, by what method, etc.).	2025/2026 Reverse circulation (RC) drilling by White Cliff Minerals - drilling was completed by reverse circulation (RC) drilling methods by Northspan Explorations Ltd. utilising a heli-portable hornet machine. 5-foot rod intervals with a 3.5-inch face sampling hammer with inner-tube assembly and 3.5-inch string diameter. 2025 diamond drilling (DD) by White Cliff Minerals – drilling was completed by diamond drilling methods by Northtech Drilling Ltd and Azrock Drilling. A heli-portable Zinex A5 rig using standard NQ rod diameter. The core was not oriented. 2026 diamond drilling (DD) by White Cliff Minerals – drilling was completed by diamond drilling methods by Azrock Drilling. A heli-portable Multipower Discovery 1.5 rig using NQ2 rod diameter. The core is oriented by AXIS Mining Technology Champ Ori system. Historic drilling completed by Kaizen Discovery Corp. in 2015 utilised a diamond drilling rig operated by Peak Drilling contractors. NQ2 diameter was used. Core-orientation procedure is unknown. Standard or triple tube drilling is unknown. 2003/2005 conventional diamond drilling (LY 38 drill model) of NQ core diameter. 1967/1968 diamond drilling completed by Coppermine River - Historic drilling in 1967/1968 was completed using 3 BBS-17A drills were active. AXT rods with AXT core barrels, AX, BX and NX casings were used with appropriate diamond set bits, shoes and shells, later in the program tungsten carbide tricone bits were used through overburden.
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples.	2025/2026 RC drilling by White Cliff Minerals checks sample recovery and sample condition at the rig site during drilling operation. An estimation (qualitative) of recovery was completed on the sample returned from the complete drill interval if loss is believed to have occurred. Reasons for loss discussed between rig site geologist and driller. Wet samples have not been encountered. Sample bias is believed to be negligible due to a preferential loss of fine/coarse material. Riffle splitting

	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	of the returned material to generate a sample produces a homogenous sample for the interval, ensuring representative sampling. Field duplicate samples are taken by spearing the homogenised retention sample, post riffle splitting. 2025/2026 diamond drilling (DD) by White Cliff Minerals – core recovery and rock quality designation (RQD) are measured by logging geologists and technicians of contractor Aurora Geosciences Ltd on a per drill run basis, of 3m. Recovery is calculated as the relationship between drilled interval and length of recovered core. No relationship between grade and recovery observed. 2015 Kaizen Discovery Corp - Core recovery was calculated as the difference between drilled intervals between drillers core blocks and the length of recovered core. Representative core samples were taken by sampling half core, cutting the core along the long axis with an electric powered core saw. No relationship is observed between recovery and grade for drillhole CP15_DD009 which returned 99.5% core recovery. 2003/2005 diamond drilling completed by Coronation Minerals - No note of core recovery within source publication for Coronation Minerals' program. Representative half core samples were taken for assay. No relationship between grade and recovery can be commented on due to lack of recovery information. 1967/1968 diamond drilling completed by Coppermine River – No routine measurement of core recovery. Representative samples were taken by sampling half core, splitting core along long axis. No relationship between grade and sample recovery determined due to lack of recovery data.
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged.	2025/2026 RC drilling by White Cliff Minerals - All intervals returned are logged for lithology and mineralisation at the camp location. 2025/2026 diamond drilling (DD) by White Cliff Minerals – All recovered drill core is logged for lithology, alteration and mineralisation at the camp location by an Aurora Geosciences contractor. All recovered core is photographed wet and dry. 2024 and 2025 rock chip sampling by White Cliff Minerals - sampling was undertaken on surface alongside lithologic, alteration and mineralisation logging. Data input presented in tabulated form alongside coordinates and sample numbers. High resolution photographs are available for RC chips and diamond drill core from the 2025 program. 2015 Kaizen Discovery Corp – core was logged for lithology, alteration, mineralisation and structure. All recovered intervals were logged. 2015 Kaizen Discovery Corp – core photography is not available. Photographs of select intervals are available. 2003/2005 diamond drilling completed by Coronation Minerals - Core intervals were logged within a core shack at the Hope Lake Airstrip. Descriptive notes are recorded including note of rock type, alteration and mineralised intersections. No geotechnical logging is available. The level of detail would not be sufficient for inclusion in a Mineral Resource estimation to JORC standards. All recovered core was logged. No photographs of the drill core are available. 1967/1968 diamond drilling completed by Coppermine River – All core intervals were logged at the Hope Lake Camp. Description of lithology, alteration and mineralisation are recorded along with depth intervals on paper format per drillhole.
Sub-sampling techniques and sample preparation	If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.	2025/2026 RC drilling by White Cliff Minerals – Holes were sampled in full using 1.52m intervals as per the 5-foot rod lengths of the rig. Assay samples were collected as a 12.5% split from a 3-tier riffle splitter used to ensure a homogenous and representative sample of the drilled interval. 2025/2026 RC drilling by White Cliff Minerals – sample size is deemed appropriate to the base metal mineralisation which is hosted by fine to medium grained copper sulphides and their associated secondary minerals (malachite, azurite).

For all sample types, the nature, quality and appropriateness of the sample preparation technique.

Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.

Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.

Whether sample sizes are appropriate to the grain size of the material being sampled.

2025/2026 diamond drilling (DD) by White Cliff Minerals – Drill core is sampled on a nominal 1.5m max interval, breaking at lithology, alteration or mineralisation boundaries. Half core is sampled for standard sample intervals, cut by a Husqvarna target portasaw ts355g. Quarter core intervals are used for field duplicate insertion.

2024 and 2025 rock chip sampling by White Cliff Minerals - Rock chip sample sizes are deemed appropriate for the style of mineralisation targeted and able to quantify the precious and base metal content. A range of 0.56-1.96 kg of material was assayed with an average of 1.1kg for 2024 samples.

2015 Kaizen Discovery Corp – Standard half core intervals were assayed. Quarter core duplicate samples were taken at specified intervals downhole as part of the quality assurance and control protocols. A total of 6 quarter core samples were taken within the reported drillhole.

2003/2005 diamond drilling completed by Coronation Minerals - Half core samples taken, split by hand on site. The nature of sample preparation is deemed fit for purpose for the target mineralisation style. No note of field duplicates are recorded by Coronation Minerals. Loring Laboratories conducted lab duplicate analyses. Sampling of half core is deemed appropriate for the mineralization being targeted.

1967/1968 diamond drilling completed by Coppermine River – Core was split longitudinally where mineralisation was visible to produce half core samples. Samples were typically 5ft lengths but intervals up to 10ft were taken on occasion. Sampling was extended at least 5 ft and, in most cases, 10ft on either side of the mineralised sections. No note of field duplicates.

Quality of assay data and laboratory tests

The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.

For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.

Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established.

2025/2026 RC drilling by White Cliff Minerals – Samples are sent to ALS Yellowknife for preparation under code PREP-31B, which entails crushing to 70% less than 2mm, riffle splitting 1kg, with the split pulverised to better than 85% passing 75 microns. Spring drilling (DAN25001-008) used multi-element ICP-MS analysis after 4-acid digestion (ME-MS61) and fire assay gold (Au-ICP21). Summer RC drilling (DAN25009-021) used ICP-AES after 4-acid digestion (ME-ICP61) with no gold analysis. 4-acid digestion is considered a near-total digestion except for barite, rare earth oxides, columbite-tantalite, and titanium, tin and tungsten minerals, which may not be fully digested. Overassay completed by OG-62 methods.

A schedule of quality control samples is inserted into the sample stream at a rate of 10%, including field duplicates, coarse blanks (OREAS C26e), and certified reference materials OREAS930 and OREAS922. Field duplicates were taken from the retention sample by spearing the homogenised chips after riffle splitting.

2025/2026 diamond drilling (DD) by White Cliff Minerals - Samples are sent to ALS Yellowknife for preparation under code PREP-31B, which entails crushing to 70% less than 2mm, riffle splitting 1kg, with the split pulverised to better than 85% passing 75 microns. Followed by multi-element ICP-AES after 4-acid digestion (ME-ICP61). 4-acid digestion is considered a near-total digestion except for barite, rare earth oxides, columbite-tantalite, and titanium, tin and tungsten minerals, which may not be fully digested. Overassay completed by OG-62 methods. A schedule of quality control samples is inserted into the sample stream at a rate of 10%, including field duplicates, coarse blanks (OREAS C26e), and certified reference materials OREAS930 and OREAS922.

Further to the inserted quality control samples ALS Laboratories conducts their own QC including reference materials during the analyses, matching the element concentrations to those observed in the analysis dataset, ensuring quality in reported assay results.

2025 rock chip sampling - will be shipped to Yellowknife via secure air freight, and received by an employee of Aurora Geosciences Ltd., who ensures sample security and maintains custody until delivered to ALS laboratories, Yellowknife for preparation. Samples will be prepared under code PREP-31B, which entails crushing to 70% less than 2mm, riffle splitting

1kg, with the split pulverised to better than 85% passing 75 microns. Followed by multi-element ICP-MS analysis after 4-acid digestion (ME-MS61) and fire assay gold (Au-ICP21).

2025 rock chip sampling by White Cliff Minerals – Blanks are inserted at a rate of 4% (OREAS C26e), no field duplicates of certified reference materials are inserted into the sample stream.

2024 rock chip sampling by White Cliff Minerals - Sent to Yellowknife via secure air freight, and received by an employee of Aurora Geosciences Ltd., who ensured sample security and maintained custody until delivered to ALS laboratories, Yellowknife for preparation. Samples are prepared under code PREP-31D and analysed by ME-ICPORE; an analysis package designed for massive sulphides. Overassay (>40% Cu) are undertaken by Cu-VOL61. Samples with visible native copper were analysed by Cu-SCR21. All samples underwent gold analysis by 30g fire assay and ICP-AES under code Au-ICP21.

2024 rock chip sampling by White Cliff Minerals - Blanks (BL-10 CDN Laboratories) were inserted at a rate of 4 %. No field duplicates or certified reference materials were inserted into the sample stream.

2015 Kaizen Discovery Corp – Samples were analysed by ALS laboratories Vancouver using prep code PREP-31B which entails crushing to 70% less than 2mm, riffle splitting 1kg, with the split pulverised to better than 85% passing 75 microns. Analysis by ME-ICP61, a four-acid (near total) digestion followed by multi-element ICP-AES finish. A total of 6 quarter core samples were taken within the reported drillhole.

2003/2005 diamond drilling completed by Coronation Minerals -0.5 g was digested by HCl, HNO₃ and HClO₄ and analysed for copper and nickel by ICP. Silver was analysed after HNO₃ and HCl digestion followed by atomic absorption, with samples greater than 30 ppm silver re-analysed with fire assay with gravimetric finish. Gold and PGMs were analysed by a 30 g split by fire assay followed by ICP analysis. Digestion for copper and nickel is noted to be a partial digestion. No geophysical tools were used. No note of insertion of quality control samples, including blanks, standards or duplicates were noted by Coronation Minerals. Loring Laboratories conducted lab duplicate analyses.

1967/1968 diamond drilling completed by Coppermine River – No details regarding assay techniques are available for the 1967/1968 drilling programs.

Verification of sampling and assaying

The verification of significant intersections by either independent or alternative company personnel.

The use of twinned holes.

Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.

Discuss any adjustment to assay data.

2025 RC and diamond drilling by White Cliff Minerals – Primary data collection is completed by White Cliff Minerals employees or contracting geologists from Aurora Geosciences Ltd. Data is entered into Excel logging templates and reviewed by White Cliff Minerals senior geologist. Data is then stored on a cloud server with 2-factor authorisation. All received results are reviewed by the senior geologist, country manager and designated competent person.

2026 RC and diamond drilling by White Cliff Minerals – Primary data collection completed by White Cliff Minerals employees or contracting geologists from Aurora Geosciences Ltd. Data is entered into MX Deposit logging software. All received results are reviewed by the senior geologist, country manager and designated competent person.

No independent review of the historic drilling (2003/2005) or 1967/1968 has been completed by personnel independent to White Cliff Minerals. Documentation of primary data in historic programs is unknown.

2015 Kaizen Discovery Corp – Data was entered into Excel logging templates. No information regarding data verification and storage protocols are known.

No adjustment to assay data, reported intervals are calculated by weighted average accounting for sample length and reported concentration. 2025/2026 RC drilling by White Cliff Minerals – drilled intervals are recorded on site in feet (Imperial) and later converted to metres (metric) as per 1 foot = 0.3048 metres.

No twin holes are reported.

Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control.	2025/2026 RC and diamond drilling by White Cliff Minerals – Collar locations were pegged out using a Garmin GPSMAP 66sr (Multiband) with foresight and backsight stakes demarcating the azimuth. Drill collars were then surveyed by a Juniper Systems Geode GNS2M after drilling. Drillhole locations reported in NAD83 UTM Zone 11N. 2024 and 2025 rock chip sampling by White Cliff Minerals - Locations of reported rock chip assay results are in NAD83 / UTM Zone 11 N. Positions of samples determined in the field by handheld Garmin GPSMAP 66sr or Garmin GPSMAP 65 units. 2015 Kaizen Discovery Corp – No note of collar survey method or method of downhole surveying. Coordinates of drillholes from the 2003/2005 Coronation Minerals program are presented in NAD83 UTM Zone 11N. Location of collars was determined by handheld GPS. Coordinates of drillholes from the 1967/1968 drilling program are presented in NAD83 UTM Zone 11N. Location of collars were determined through georeferencing of historic drill location maps assisted by in-field measured GPS points taken with a Juniper Systems Geode GNS2M where historic collars with hole ids were located. Topographic control is provided by a DTM created from the Canvec data series, an open-source dataset from the Government of Canada, Natural Resources. Data provided as ESRI shapefile with 10m contours.
Data spacing and distribution	Data spacing for reporting of Exploration Results. Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied.	2025 RC and diamond drilling by White Cliff Minerals – Maiden drilling program spacing of collars between 28 and 60 m at the Danvers target area. Drilling at the Hulk target is planned on a regional scale with kilometres between holes. Additional work will be required at all targets to establish continuity for inclusion in estimation to JORC standards. 2026 RC/DD drilling at Danvers is regional in nature. Holes are 300-600m apart along strike NE/SW along the Teshierpi Fault Zone and are exploratory in nature. Infill will be completed to increase confidence. They will not be sufficient to demonstrate high levels of certainty in the continuity of mineralisation sufficient for Mineral Resource Estimation. 2024 and 2025 rock chip sampling by White Cliff Minerals - Reported rock chip results are spaced based on locations of prospective lithologies, alterations and visible mineralisation. 2015 Kaizen Discovery Corp – Drillhole CP15_DD009 formed part of a regional drilling campaign, with drillhole CP15_DD008 located 10 km east. This drilling does not have sufficient data density to inform geological or grade continuity. 2003/2005 diamond drilling completed by Coronation Minerals – drillholes cover 656 m NE/SW dimension with spacing of between 30 and 150m between adjacent drillholes. The drilling completed by Coronation Minerals is not sufficient for a mineral resource estimation to JORC standards. 1967/1968 diamond drilling completed by Coppermine River – Average drillhole spacing was 100ft. Drillhole spacing within the 1967/1968 program is deemed acceptable for inclusion in the historic estimate, however, cannot be reclassified as JORC compliant resources/ore reserves without significant evaluation or further exploration work. No sample compositing applied.
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is	2025/2026 RC and diamond drilling by White Cliff Minerals – Mineralisation at Danvers 1 is hosted within a breccia/vein system which strikes NE/SW with a variable dip to the NW inferred. Drilling completed with azimuth towards the SSE, perpendicular to the strike of the inferred mineralisation. Oblique intersections of the hole and the mineralisation is expected, and thus all reported intervals are drilled widths,

considered to have introduced a sampling bias, this should be assessed and reported if material.

not true thicknesses. More work will be required to understand the trend of mineralisation at Danvers, including any plunging high-grade components and report true thicknesses.

- 2025 drillhole DAN25008 was drilled down-dip to efficiently test numerous historic drill intercepts within the core of Danvers 1 and to effectively test below the historic drilling using the heli-portable RC drilling rig that has limited depth capacity. This drillhole does not represent true thickness, and would have introduced sample bias due to the down-dip drilling.
- 2026 exploration, reverse circulation drilling along the Teshierpi fault zone has defined a tentative steep dip to the SE for newly discovered mineralisation in the Danvers 2 area. This was determined by a fence of drillholes conducted across DAN25019 including DAN26003, 004, 006. Drilling has been completed towards the NW aiming to cross a steeply SE dipping structure. 2026 exploration drilling adjacent to Danvers 1 deposit returns to the SE drilling to intersect the steep NW dipping known body.
- Diamond drilling has been conducted across the Danvers 1 area and newly discovered mineralisation along the Teshierpi Fault Zone. The fault zones trend NE/SW and drilling has primarily been conducted towards the SE or NW, depending on the target location and accessibility for pad construction. Mineralisation within the main fault zones is inferred to be very steeply dipping to sub-vertical. A level of sample bias is expected given the oblique angle of drillhole intersection. Further work is required to understand the true widths and therefore all reported drill intersections are treated as drilled widths.
- Drilling at the Hulk target, or other sedimentary hosted copper targets in the Rae Group is conducted by vertical/near vertical drillholes to intersect the sediments near perpendicular as they dip <5 degrees to the north.

2024 and 2025 rock chip sampling by White Cliff Minerals - Grab sampling is conducted where mineralisation or alteration of interest is observed. Sampling is conducted as a composite of the outcrop to produce a representative sample.

2015 Kaizen Discovery Corp – Reported drillhole is vertical, this is deemed appropriate to test the shallow north dipping sediments.

The 2003/2005 drillholes were conducted at inclinations of between -60 and -65. The intersection angle with the known mineralisation is unknown, therefore a drilled interval length is presented, the assay intervals are not treated as true thicknesses. All drillholes were towards 150 azimuth (SSE) to intersect the NE/SW trending zone perpendicular to strike.

1967/1968 drilling efforts were predominantly inclined at -45 degrees to intersect the near vertical breccia body at an appropriate angle, near vertical (-85) inclined holes were used when targeting the flow top replacement bodies within the basalts, offering a near perpendicular intersection angle. Most drilling was conducted at an azimuth (150) towards the southeast, perpendicular to the known northeast-southwest strike of mineralisation. Inclined drillholes targeting the interpreted near-vertical breccia zone will not have delivered true thickness intersections of the mineralisation. The degree of possible sampling bias introduced by this relationship is unknown.

Sample security The measures taken to ensure sample security.

2025/2026 RC drilling by White Cliff Minerals – Samples are bagged at the rig site with the corresponding sample tag placed inside the bag and secured by cable ties. Samples were placed into larger rice sacks, which were labelled and cable tied closed. Samples were stored at the sample farm in a remote field camp before transporting to Yellowknife by chartered flight where the samples are met by an employee of Aurora Geosciences Ltd and delivered directly to ALS preparation laboratory Yellowknife.

	2025/2026 diamond drilling (DD) by White Cliff Minerals – Samples were bagged in the core cutting shack immediately after cutting by an employee of Aurora Geosciences Ltd. Samples were placed into rice sacks labelled with sample ids and cable tied closed. Samples are then stored in the sample farm of the remote field camp before transporting to Yellowknife by chartered flight where the samples are met by an employee of Aurora Geosciences Ltd and delivered directly to ALS preparation laboratory Yellowknife. ALS Laboratory conduct checks to ensure the delivered samples match the list of samples sent for assay as per the submittal form and all are accounted for. A chain of custody is maintained and documented by Aurora Geosciences and ALS Laboratories. 2015 Kaizen Discovery Corp – No note of measures taken to ensure sample security. 2003/2005 diamond drilling completed by Coronation Minerals - Samples were stored in self-locking, cable tied sample bags, before being batched into rice sacks, which were also cable tied. Transport from the remote field camp to the laboratory was completed by freighting services. 1967/1968 diamond drilling completed by Coppermine River – unknown sample security protocols.
Audits or reviews	The results of any audits or reviews of sampling techniques and data. No independent site visit or audit/review of the procedures/assay results has been conducted.

SECTION 2: REPORTING OF EXPLORATION RESULTS

(Criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	The Rae Copper Project is made up of 93 mineral claims in 3 blocks and 1 mineral lease in the Kitikmeot region of Nunavut, northern Canada. The claims and lease cover a total area of >2,000km². All mineral claims are in good standing. In November 2024 White Cliff Minerals acquired mineral lease L-2797 from Victoria Copper Inc. granting 100% ownership of the project. Victoria Copper Inc. retained a 1% net smelter royalty (NSR) over production from the lease. White Cliff Minerals can buy back 50% of the NSR for CAD \$1 million in cash and has right of first refusal with respect to the sale of the remaining 50% of the NSR (0.5% NSR). White Cliff Minerals is in possession of a type B water license issued by the Nunavut Water Board and a Class A Land Use Permit granted by the Crown-Indigenous Relations and Northern Affairs Canada allowing the completion of exploration drilling and camp establishment. White Cliff Minerals have obtained permission from the Kitikmeot Inuit Association to conduct exploration on this property.

Exploration done by other parties

Acknowledgment and appraisal of exploration by other parties.

Tools and idols, made from native copper found in the Coppermine Region have been worked and traded by the local Inuit population going back centuries.

The area first came to the attention of European and English explorers in the 17th century. In 1771 Samuel Hearne reported finding a four-pound native copper nugget at surface.

The Coppermine River area was first staked in 1929 and continued slowly until 1966 when, due to the discovery of several high-grade surface deposits of copper. By late 1967 over 40,000 claims were lodged by more than 70 different companies (E.D. Kindle, 1972). In his report, Kindle locates and gives a brief description of over 80 high grade copper occurrences.

The largest copper deposit in the area is called Area 47 or the DOT 47 Lode in a vertical, tabular body 1,500 feet long and 35 feet wide along one of the faults of the Teshierpi fault zone (Kindle, 1972). The DOT 47 deposit was estimated to host 4,162,000 tons grading 2.96 % copper remaining open at depth and to the southwest. The definition of this deposit by Coppermine River Limited marked the largest exploration effort to date.

Mapping and exploration in the area were conducted over several campaigns by regional workers and individual companies until 1970, when the area was mapped in detail by W.A. Barager and J.A. Donaldson. During this time, Barager conducted a litho-geochemical study of the Coppermine River basalts. E.D. Kindle followed this work and produced the first major collaboration of mineralisation, geology, and geologic history in 1972. Following this, Ross and Kerans (1989) mapped Middle Proterozoic sediments of the Hornby Bay and Dismal Lake Groups to the south and west of the region.

Exploration and development persisted sporadically between 1990 - 2010, when companies started to utilise geophysics at the Area 47 and Muskox Intrusion to the southeast of the project area, the latter of which witnessed drilling for several years.

Mineral claims in the region continued to lapse because of depressed economic conditions, until most of the Coppermine area was free and available for staking.

Exploration 2013-2015 was conducted by Tundra Copper Corporation, with work from 2013-2014 detailed in Assessment Report 086024. The work completed included geological mapping, rock chip sampling and later diamond drilling in 2015 consisting of 2060 m.

Of importance is the result of a regional drilling program, testing the basal portion of the Rae Group Sediments. A series of 7 vertical drillholes tested the Rae Group – Coppermine River Group unconformity, targeting sediment-hosted copper deposits for a total of 1949 m. The final drillhole of the program, furthest to the west, drillhole CP15_DD009 intercepted 29 m at 0.57 % Cu from 197 m depth and noted a zonation of copper sulphides of chalcocite-bornite-chalcopyrite upwards from the unconformity. This interval and zonation of copper sulphides is a significant proof of concept for sediment hosted copper deposits within the Rae Group, possessing similarities with the Central African Copperbelt and Kupferschiefer districts.

Geology

Deposit type, geological setting and style of mineralisation.

The Rae Copper Project is located within the north dipping Coppermine Homocline. It unconformably rests on the metamorphic and plutonic rocks of the ca. 1.88-1.84 Ga Wopmay Orogen (Barager et al, 1996). The Hornby Bay Group consists of continental sedimentary and volcanic strata overlain by transitional marine sedimentary rocks of the Dismal Lakes Group. The Coppermine River Group overlies these older sedimentary groups and form a thick sequence of continental flood basalts capped by red bed sandstones. A further unconformity is present where the Rae Group, a sedimentary package sits above the Coppermine River

	Group, defining a return to marine conditions with a possible age of sedimentation onset of 1070 Ma (Rainbird et al, 2020). Crosscutting the Coppermine River Group and overlying Rae Group are the Coronation Sills, gabbroic composition and believed to have been emplaced at 723 +/- 4Ma (Heaman et al, 1992). Mineralisation in the Rae Copper Project comprises a variety of styles within both the Copper Creek Formation basalts and the overlying basal Rae Group sediments. Chalcocite dominant vein and breccia systems, flow top replacements and sedimentary hosted stratiform copper. Specifically, the reduced-facies sub type of sediment hosted copper deposits, akin to the Central African Copperbelt.	
Drill hole Information	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: ■ easting and northing of the drill hole collar ■ elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar ■ dip and azimuth of the hole, down hole length and interception depth, hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	Collar information for any relevant drillholes are included in table form in this release.
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated.	Reported copper intervals were calculated using a length weighted average. No cutting of high grades or cut off grades have been used in the reporting of drilled thickness intervals. A cut of grade of 2% Cu was utilised for the historic estimate. No data aggregation techniques have been applied. No metal equivalent values are being used.
Relationship between mineralisation	These relationships are particularly important in the reporting of Exploration Results.	2025 RC and diamond drilling by White Cliff Minerals – Reported results are treated as drilled widths not true thicknesses. Mineralisation at Danvers is hosted within a breccia/vein system which strikes NE/SW with a variable dip to the NW inferred. Drilling completed with azimuth towards the SSE, perpendicular to the strike of the inferred mineralisation. Oblique intersections of the hole and the mineralisation is expected, and thus all

widths and intercept lengths

If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.

If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g., 'down hole length, true width not known').

reported intervals are drilled widths, not true thicknesses. More work will be required to understand the trend of mineralisation at Danvers and report true thicknesses, including the effect of any plunging high-grade zones.

2025 drillhole DAN25008 was drilled down-dip to efficiently test numerous historic drill intercepts within the core of Danvers 1 and to effectively test below the historic drilling using the heli-portable RC drilling rig that has limited depth capacity. This drillhole does not represent true thickness, and would have introduced sample bias due to the down-dip drilling.

Any reported intervals from sedimentary hosted targets are understood to be close to true thickness given the near perpendicular intersection of the sediments in vertical drillholes, unless otherwise stated.

2026 exploration, reverse circulation drilling along the Teshierpi fault zone has defined a tentative steep dip to the SE for newly discovered mineralisation in the Danvers 2 area. This was determined by a fence of drillholes conducted across DAN25019 including DAN26003, 004, 006. Drilling has been completed towards the NW aiming to cross a steeply SE dipping structure. 2026 exploration drilling adjacent to Danvers 1 deposit returns to the SE drilling to intersect the steep NW dipping known body

2026 Diamond drilling has been conducted across the Danvers 1 area and newly discovered mineralisation along the Teshierpi Fault Zone. The fault zones trend NE/SW and drilling has primarily been conducted towards the SE or NW, depending on the target location and accessibility for pad construction. Mineralisation within the main fault zones is inferred to be very steeply dipping to sub-vertical. A level of sample bias is expected given the oblique angle of drillhole intersection. Further work is required to understand the true widths and therefore all reported drill intersections are treated as drilled widths. Drillholes are typically inclined -45 to -65 depending on the depth of intersection, accessibility for pad construction or target depth, to assess for the steeply dipping breccia bodies. If drilling were to assess for the flow top replacements, drilling should be more steeply inclined to produce a closer to true thickness interval. Reported thicknesses are drilled widths, not true thicknesses.

2015 Kaizen Discovery Corp – The downhole width is reported for CP15_DD009, which is interpreted to be very close to true width given the near horizontal orientation of sedimentary bedding which is controlling copper mineralisation. The vertical drillhole is fit for purpose.

2003/2005 diamond drilling completed by Coronation Minerals - Downhole interval thicknesses are presented. At this stage true widths are not known. Holes drilled in 2003/2005 were inclined between -60 and -65 degrees and have variably oblique intersections with the interpreted mineralisation outline.

1967/1968 diamond drilling completed by Coppermine River – Holes drilled in 1967/1968 were oriented at -45 primarily to intersect the near vertical breccia body. True thickness is not known for these intersections.

Diagrams

Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include but not be limited to a plan view of drill hole collar locations and appropriate sectional views.

Location maps and sections provided within the release with relevant exploration information contained.

Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced avoiding misleading reporting of Exploration Results.	All exploration results have been reported. The reporting of exploration results is considered balanced by the competent person.
Other substantive exploration data	Other exploration data, if meaningful, should be reported including geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	2,427 line-km of MobileMT airborne geophysics was completed during the 2024 field program at the Rae Copper Project. The survey was conducted by Expert Geophysics using an AS 350 B2 SD2 helicopter of Capital Helicopters. The survey lines were oriented E/W and spaced at 400m intervals, with tie lines running N/S and spaced 4000m apart. The average survey speed was 23m/s with a helicopter terrain clearance of 152m. The magnetometer was on average 81m above terrain and 62m for the EM sensor. Data was controlled for quality, interpolated and underwent 2D inversion, completed by Expert Geophysics. 2025 MobileMTd – A drone based mobile Magneto-Telluric survey was completed across select parts of the Danvers mineral lease. Lines were oriented NW/SE, roughly perpendicular to the Teshierpi Fault Zone. A total of 177 line-km were flown with a line spacing of 100m over the main Danvers deposit and 200m outside this main zone. 2025 HeliTEM – A helicopter-borne electromagnetic/magnetic survey was flown by XCalibur Smart Mapping. Survey lines at Danvers were NW/SE trending and spaced 100m apart, and oriented perpendicular to the Teshierpi Fault Zone which trends NE/SW. 13 wide spaced test survey lines were flown over Hulk-Stark at variable line directions as a proof of concept to see if the Rae Group sediments are electrically conductive. 2026 Metallurgical test work – Test work was completed by Sepro Laboratories on a master composite and 3 variability composite samples of material sourced from reverse circulation drillhole DAN25008 retention material. Testing through conventional flotation produced up to 95.4% Cu recovery and 93.3% Ag recovery producing concentrates of approximately 40% Cu and 150g/t Ag with saleable concentrate grades of >28% early in the cleaner circuit. No deleterious elements identified in the concentrates. (see company news release dated 8 April 2026 “Excellent Metallurgical Results Confirm >95% Cu and >93% Ag Recoveries via Conventional Processing”)
Further work	The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Metallurgical test work to understand the processing of copper-silver mineralisation at Danvers. Follow up drilling along the Teshierpi Fault Zone for further Danvers-style epithermal copper-silver deposits and within the Stark-Hulk sub-basin for expansions to sediment hosted copper discoveries guided by 2025 geophysical surveys Target generation for further sediment hosted copper and volcanic-hosted (Danvers-style) copper deposits Planning further geophysical surveys across the wider project area

SECTION 3: ESTIMATION AND REPORTING OF MINERAL RESOURCES

(Criteria listed in section 1, and where relevant in section 2, also apply to this section)

Criteria	JORC Code explanation	Commentary
Database integrity	Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes. Data validation procedures used.	No information is available regarding the transcription of data from data collection to estimation given the historic nature of the estimate. Certain drillhole locations, included in the historic estimate were verified by Coronation Minerals' personnel in 2003/2005.
Site visits	Comment on any site visits undertaken by the Competent Person and the outcome of those visits. If no site visits have been undertaken indicate why this is the case.	The JORC Competent Person has not visited the site which hosts the historic estimation as the project has been recently acquired.
Geological interpretation	Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit. Nature of the data used and of any assumptions made. The effect, if any, of alternative interpretations on Mineral Resource estimation. The use of geology in guiding and controlling Mineral Resource estimation. The factors affecting continuity both of grade and geology.	The project is an epigenetic, fault breccia hosted copper-silver deposit. It also hosts intervals of replacement style mineralization within vesicular flow tops of basalt flows. The deposit style is well recognized within the Copper Creek Basalt Formation. Due to the historic nature of the estimate and lack of review of drill core or other evidence an assumption is made that the assay and geological interpretation is fit for purpose within the historic estimate. Alternative interpretations of the deposit style are not believed to have altering effects on the historic estimation. The orientation of the main breccia body, in line with the major NE/SW trending Teshierpi Fault Zone guided the orientation of historic drilling which was used during the historic estimate. Knowledge of the shallow NE dipping basalt flows informed the drilling and estimation of the flow-top replacement style mineralization. Continuity in the breccia and host structure depend on the intersection of major and minor faults and fracture zones. Continuity of grade within the flow top replacement bodies is dependent on the primary porosity of the basalt flow tops and their proximity to feeder structures/the main breccia zone.
Dimensions	The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.	The historic estimate covers an average of 40 to 45 ft width with local swelling to over 100 ft. The top of the body appears to have a horizontal attitude along strike with the bottom of defined zones gently plunging to the southwest. The estimate covered 1528 ft strike length with a vertical depth of 600 ft.
Estimation and modelling techniques	The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used. The availability of check estimates, previous estimates and/or mine production records and	The historic estimate did not use computer software and was completed using plan view and 2D sections along completed drill fences. The estimation technique is deemed appropriate for the historic nature of the estimate. The areas within the outlined blocks were calculated by taking 3 measurements of each block with a planimeter and averaging the readings. Drill-indicated reserves were computed from specific measurements based on the following: a) The length of copper bearing diamond drill core intersections b) The weighted average grade of the above intersections c) The area of influence of diamond drill core intersections (see No. 5)

	whether the Mineral Resource estimate takes appropriate account of such data. The assumptions made regarding recovery of by-products. Estimation of deleterious elements or other non-grade variables of economic significance (e.g. sulphur for acid mine drainage characterisation). In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed. Any assumptions behind modelling of selective mining units. Any assumptions about correlation between variables. Description of how the geological interpretation was used to control the resource estimates. Discussion of basis for using or not using grade cutting or capping. The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.	d) The horizontal projection of the area of influence (see No. 6) e) A calculated tonnage factor (see No. 2) f) A total of 30,337 feet of diamond drilling on the 47 Zone and its southwest extension with the holes on the average 100 feet apart on section Inferred reserves were calculated in the same manner as indicated reserves but are based on evidence of continuity as suggested by diamond drilling and/or longitudinal projection The area of grade influence of each diamond drill hole intersection on a particular section was extended one halfway to adjacent holes on the same section of 50 feet beyond the top and bottom hole unless geological evidence suggested that longer projections were justified The horizontal distance of grade and area projection was taken as half the distance to adjoining sections. The ore was projected beyond the last sections on each end of the deposit a distance equal to half the distance to the last adjoining section The grade for the inferred reserve blocks was calculated from the average grade or grades of the adjoining block or blocks The elevations to which reserves were projected on each section were determined from a longitudinal projection of the orebody On both plan and sections of copper bearing diamond drill holes straight wall ore limits are assumed to prevail between each drill intersection There are no available check estimates. The by-product silver was estimated for each 10% contained copper there is approximately 1 oz of silver. This was determined by metallurgical test work on diamond drill core samples conducted by Lakefield Research, silver was not routinely assayed during drilling and thus not included in the estimate. The geological model, created in 2D sections along drill fences influenced the estimate through creation of blocks controlled by either the breccia zone or flow top replacement, which correlated to the drillhole intersections. These blocks were then combined per section. A 2% copper cut of grade was applied.
Moisture	Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.	The moisture content for tonnage calculations is unknown. No note of dry basis estimation is recorded and given the historic nature of the estimate it is assumed a natural moisture basis was used.
Cut-off parameters	The basis of the adopted cut-off grade(s) or quality parameters applied.	A 2 % copper cut-off grade was included in the estimate.

Mining factors or assumptions	Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.	Mining parameters detailed in this section were taken from the report "A Preliminary Feasibility Report on the Hope Lake Copper Deposit, Mackenzie. Assessment Report INAC (Exploration Report), Bracken, J M; Seasor, R W; Neal, H E; Leslie, C A; Pullen, T C. April 1, 1968". The report defines a 1000 – 1500 ton per day plant size operating 350 days per year. The mining method is described as consisting of open stope for the vertical breccia body and room and pillar methods through the flow top replacement bodies. A dilution of 10% was accounted for in the historic estimate, adding in material calculated to be 0.6% Cu. A case for open pit mining was not pursued in any detail.
Metallurgical factors or assumptions	The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made	The use of the term "ore" in the following section is not taken by White Cliff Minerals to imply economic extraction of metal contents, however, is used to describe the processing outlined in the referenced report. The completion of additional work and evaluation may not define JORC compliant resources/reserves. The report "A Preliminary Feasibility Report on the Hope Lake Copper Deposit, Mackenzie. Assessment Report INAC (Exploration Report), Bracken, J M; Seasor, R W; Neal, H E; Leslie, C A; Pullen, T C. April 1, 1968" defines a mining scenario of a 1500 ton per day mill. The report notes similarities of the "ore" with that treated at Roan Antelope in northern Rhodesia (operated since 1931 to date of 1968 report) with the successful operations at Mufulira and Roan Antelope adding support and confidence to the present preliminary design. Test work completed by Lakefield Research and detailed in the 1968 Preliminary Feasibility Report conducted 43 bench scale grinding and flotation tests on 5 composites from 1967 drill core totalling 2462 feet of material and found no other metals apart from copper and silver in significant quantities. Metallurgical test work outlined 55-66% copper concentrates with copper recoveries of 85-95% depending on the grind and flowsheet. Silver content in the concentrate varies from 4.5 to 5.5 oz/t with recoveries in the range of 82 – 95% Ag. The concentrate is chiefly chalcocite with considerable bornite, minor chalcopyrite, covellite and pyrite. Very little to no pyrrhotite has been detected. An excerpt from the report states "The chalcocite and bornite are readily floated with preliminary indications that a coarse high-grade concentrate can be removed after the rod mill or ball mill. The very low pyrite and pyrrhotite content helps the flotation and does not require a depressant for these sulphides. Flotation time is considered normal to fast for this ore". A processing flowsheet is presented with the following components, conveying of ore to primary jaw crusher, followed by crushing to a fine ore storage unit, grinding of ore to 50% minus 325 mesh before flotation by ball/rod mills, with possibility of a coarse copper concentrate "scalp off", 2 banks of flotation equipment each consisting of 4 rougher and 5 scavenger cells before movement into thickening and filtering systems.
Environmental factors or assumptions	Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfield project, may not always be well advanced, the status	The historic estimate and associated pre-feasibility study notes the use of a tailings thickener, which will allow for recirculation of process water, limiting required extraction from nearby water sources. An area, to the north of the deposit was highlighted for use as a tailings area within a natural depression. The deposit is dominated by chalcocite and bornite, zoning outwards to chalcopyrite and pyrite sulphide assemblages. Given the acid generating potential of pyrite when exposed to the atmosphere this should be mitigated when designing waste storage (tailings) facilities. The arctic environment, and presence of well-established permafrost will also be accounted for in future studies.

	of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.	
Bulk density	Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples. The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit. Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.	Bulk density measurements were conducted on historic drill core samples during metallurgical test work completed by Lakefield Research. The number of drill core samples tested and their locations within the deposit or representativeness is unknown. A bulk density of 11 sq ft per ton was used. No details are available regarding the method of determination of the bulk density value. It is unknown if vugs, porosity or other void spaces were accounted for.
Classification	The basis for the classification of the Mineral Resources into varying confidence categories. Whether appropriate account has been taken of all relevant factors (i.e. relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data). Whether the result appropriately reflects the Competent Person's view of the deposit	The historic estimate was classified as ore reserves comprising indicated and inferred resources. These are non JORC compliant terms and White Cliff Minerals is not treating the estimate as a current JORC compliant resource estimate. The estimate is classified as historic, non JORC compliant.
Audits or reviews	The results of any audits or reviews of Mineral Resource estimates.	No official/independent audits or reviews of the historic estimate have been completed. White Cliff Minerals has conducted proof reading and cross-referencing data where possible to minimize transcription errors when reporting details of the historic estimate.
Discussion of relative accuracy/confidence	Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors	The method of estimation is deemed appropriate for the historic nature of the estimate. The weighted averaging of copper in drillhole intersections is well established and the resulting estimation is constrained by the geology and mineralisation with both the breccia zone and flow top replacements. Given the historic nature of the exploration work which informed the historic estimate the drill core has not been viewed by the Competent Person and thus not been re-assayed or validated at this time. The assay procedures are also unknown, with details of the detection limits and digestion efficiency (partial or total digestion) unknown, which may influence the copper assay results. No standards, blanks or field

that could affect the relative accuracy and confidence of the estimate.

The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.

These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.

duplicates are noted to have been included in the sample stream which generated the assays included in the estimate, however, check assays are noted to have been completed by a second laboratory.

The historic nature of the estimate can only be deemed accurate through the re-drilling of previously reported holes. Further exploration work would include the industry standard diamond and/or reverse circulation methods with a robust quality control program of blanks, standards and duplicates inserted into the sample stream for assay. Initial work would aim to confirm the geological model outlined in historic sections and through twinned holes understand the difference in historically reported intercepts and modern assay results. Bulk density measurements would be taken during diamond drilling activities, covering both mineralisation and host rock/alteration domains for inclusion in possible future resource estimations. This would increase the confidence in the historic results which informed the historic estimate where a comparison of modern and historic data/results can be completed.

Verification work is planned to commence in 2025, and White Cliff Minerals is in possession of the required funding to commence this work.