

THICK, HIGH-GRADE GOLD INTERCEPTS RETURNED FROM MINYARI DEPOSIT

22 METRES AT 8.2 G/T GOLD INCLUDING 5.1 METRES AT 27.4 G/T

Antipa Minerals Ltd (ASX: **AZY**) (**Antipa** or **the Company**) is pleased to report high-grade gold results from its Minyari deposit and further strong gold intersections at Tim's Dome, as part of the fifth batch of assay results from Phase 1 CY2026 drilling at its 100%-owned, 3,840km² Minyari Gold-Copper Project (**Minyari Project**) in Western Australia's Paterson Province (see Figure 1).

Batch 5 results comprise 22 reverse circulation (**RC**) drill holes totalling 4,588m at Tim's Dome and Minyari Dome, three diamond core holes at Minyari Dome and 79 air core holes at Chicken Ranch.

Assays from previously unsampled sections of a diamond core hole drilled through the Minyari deposit in 2025 returned **22m at 8.2 g/t gold and 0.35% cobalt, including 5.1m at 27.4 g/t gold and 1.04% cobalt**. These results provide important new grade information from within the existing Minyari deposit.

Two drill rigs remain active across the Minyari Project, with drilling ongoing at Tim's Dome and AL01.

HIGHLIGHTS

Minyari Deposit Returns Thick, High-Grade Gold

- **22m at 8.2 g/t gold and 0.35% cobalt** from 100m at **Minyari** (25MYD0540), including **5.1m at 27.4 g/t gold and 1.04% cobalt** from 107.9m, from previously unsampled core.
- **Maximum Minyari Dome individual 1m grades from Batch 5 drilling of 82.2 g/t gold, 2.91% copper, 39.8 g/t silver and 0.18% cobalt.**
- **Further gold mineralisation intersected at GEO-01 Main Zone and WACA, extending mineralisation approximately 230m down dip and 80m down plunge respectively.**
- Notable results included:
 - **GEO-01 Main Zone: 26.6m at 1.4 g/t gold and 0.04% copper** from 640.4m (26XMDD0555), including, **18.9m at 1.8 g/t gold and 0.06% copper** from 644.1m.
 - **WACA: 44m at 0.5 g/t gold from 386m** (26XMDD0556), including **21m at 0.8g/t gold** from 386m.
- **Additional gold-copper mineralisation intersected at Rizzo, including 12m at 1.3 g/t gold and 0.35% copper** from 70m (26XMDC1006), with mineralisation remaining open.

Further Mineralisation Above the Tim's Dome AEM Conductor

- Further gold-copper-lead-silver mineralisation intersected over approximately 600m of strike, including, **9m at 1.5 g/t gold, 0.11% copper and 0.53% lead** from 178m (26XTDC0081) and **51m at 0.24% copper from 241m** (26XTDC0080).
- **Maximum Tim's Dome 1m from Batch 5 grades of 10.1 g/t gold, 2.51% copper, 1.47% lead and 6.4 g/t silver.**

- Diamond core drilling is testing the 1.2km-long AEM conductor beneath these mineralised zones with **two holes complete and a third hole nearing completion.**

Chicken Ranch Results Defined Additional Shallow Gold Targets

- **Shallow, high-grade gold mineralisation** intersected to the east of the Chicken Ranch Mineral Resource, with new mineralised zones **remaining open both along strike and down dip.**
- Notable Batch 5 intersections include **14m at 2.1 g/t gold** from 40m (26XCRA0228), including **2m at 13.0 g/t gold from 48m.**
- **Maximum 1m Batch 5 grades of 18.7 g/t gold, 0.07% copper, 1.8 g/t silver and 0.52% cobalt.**

Active Drilling Continues Across the Broader Minyari Project

- Total of 330 Phase 1 holes for 42,248m completed to date, comprising 116 RC holes, 208 air core holes and five diamond core holes.
- Two diamond core holes completed at Tim's Dome with a third nearing completion to direct test the AEM conductor target.
- RC drilling recently commenced at AL01.

Antipa's Managing Director, Roger Mason, commented

"These latest results are another encouraging demonstration of the opportunities we have to grow the Minyari Project, both around our existing deposits and through delivering new gold and copper discoveries.

The 22m at 8.2 g/t gold assay result at Minyari is an excellent result from previously unsampled core within the deposit area. At the same time, the latest drilling at GEO-01, WACA and Rizzo continues to identify opportunities to extend mineralisation beyond zones that we've currently defined.

We're now also making good progress at Tim's Dome. Results from this round of drilling have now identified further zones of mineralisation along the eastern limb of the deposit above the AEM conductor target, with diamond drilling underway direct testing that target.

Chicken Ranch is another satellite area where relatively early-stage drilling is highlighting opportunities for further work, with high-grade gold intersections returned outside the main resource corridor.

We have several drill programmes progressing in parallel, more assay results to come and a substantial pipeline of targets to pursue. The objective remains to systematically grow our understanding of these mineralised systems and, where drilling supports it, convert that opportunity into additional Mineral Resources to add to our already substantial future development opportunity at Minyari Dome."

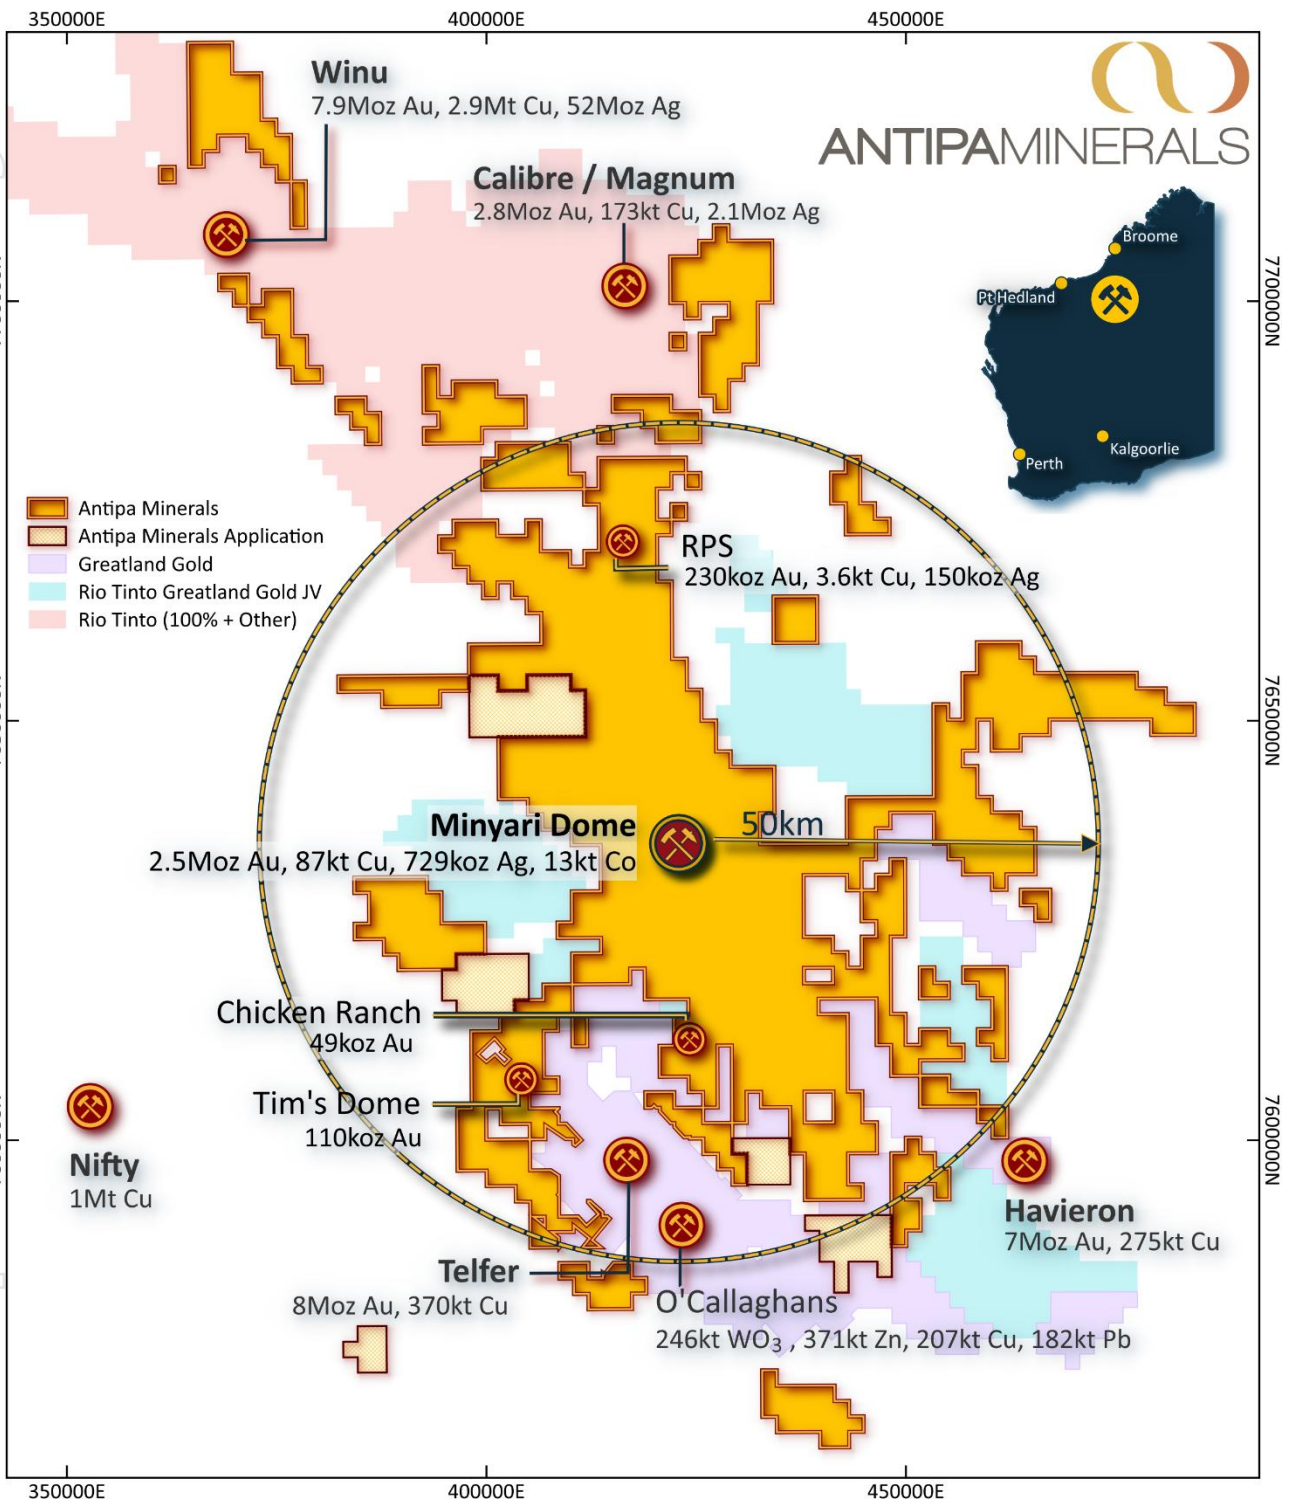


Figure 1: Plan showing location of Antipas 100%-owned, 3,840km² Minyari Project: Plan includes Greatland Resources' Telfer Mine, Havieron development project and O'Callaghans deposit, Rio Tinto-Sumitomo's Winu deposit, Rio Tinto's Calibre-Magnum deposits, and Cyprum's Nifty Mine¹. NB: Regional GDA2020 / MGA Zone 51 co-ordinates, 50km grid.

¹ Telfer, Havieron and O'Callaghans refer to Greatland Resources Ltd ASX release dated 30 March 2026, "December 2025 Group Mineral Resource Statement". Winu refer to Rio Tinto Ltd ASX release dated 19 February 2025, "Mineral Resources and Ore Reserves updates". Nifty refer to Cyprum Metals Ltd ASX release dated 14 March 2024, "Updated Nifty MRE Reaches 1M Tonnes Contained Copper". Calibre refer to Antipa release dated 26 August 2024, "Calibre Gold Resource Increases 19% to 2.5 Moz - Citadel JV". Magnum refer to Antipa release dated 23 February 2015, "Calibre and Magnum Deposit Mineral Resource JORC 2012 Updates".

CY2026 BATCH 5 RESULTS DETAIL

The fifth batch of Phase 1 CY2026 assay results comprises 22 RC drill holes for 4,588m, from Tim's Dome and Minyari Dome, three Minyari Dome diamond core holes and 79 Chicken Ranch air core holes. Refer to Table 1a-b and Tables 2a-b and Figures 2 to 18.

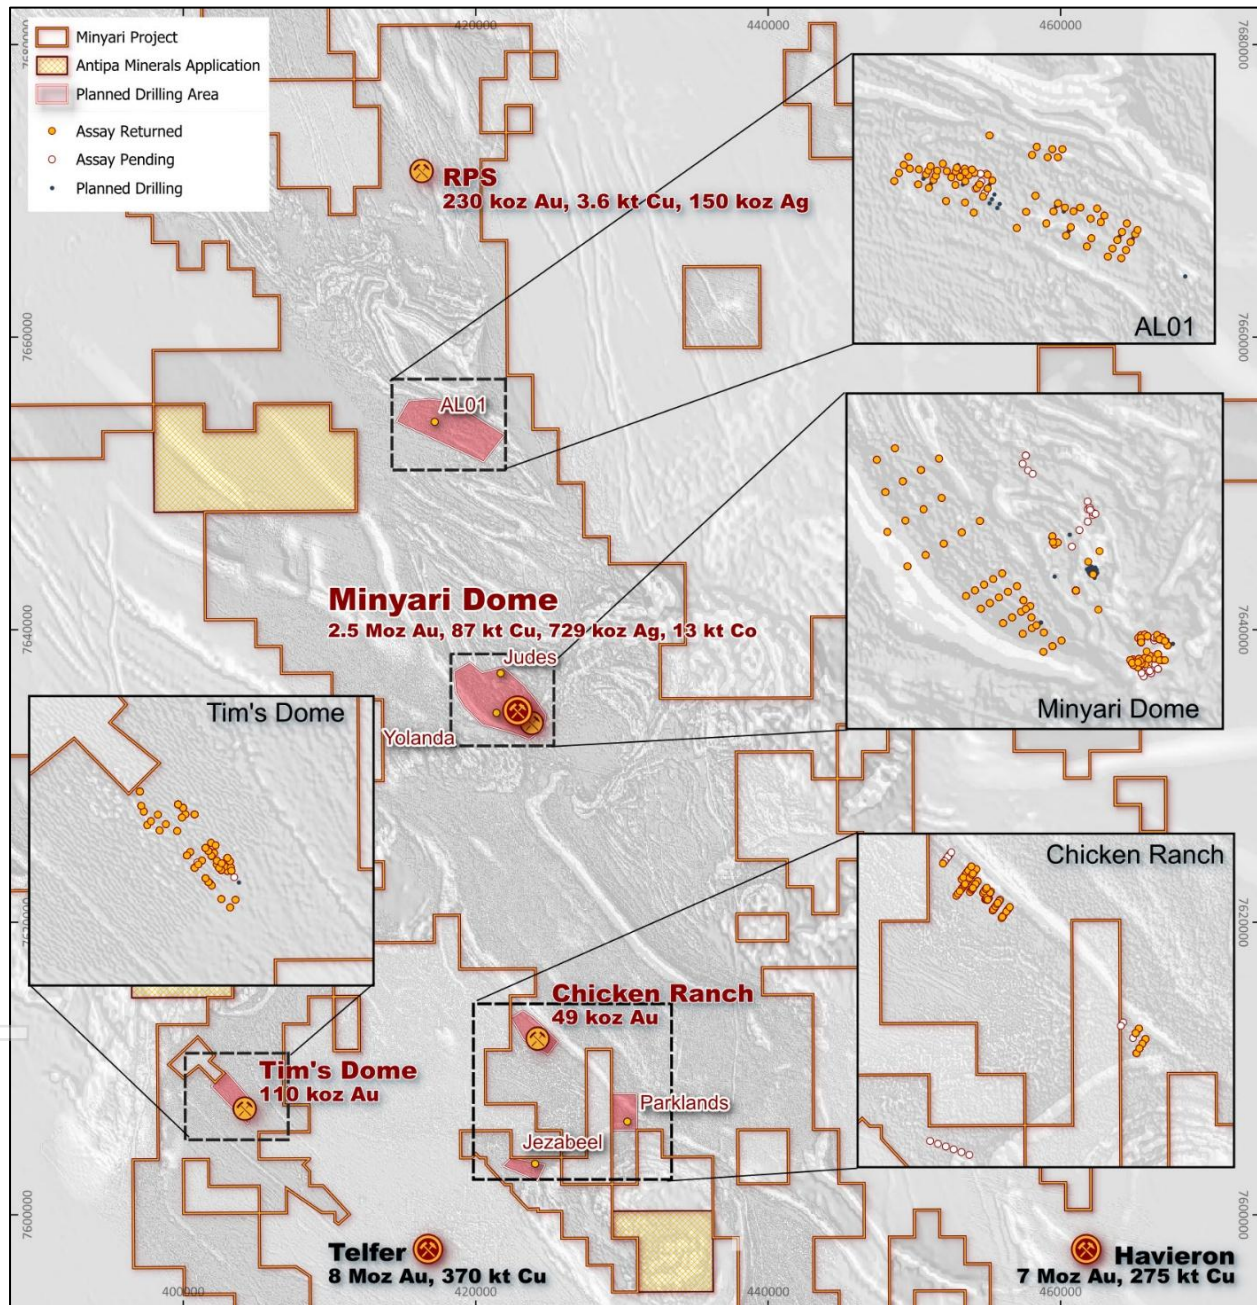


Figure 2: Plan of the central region of Antipa's Minyari Project: Showing gold ± copper greenfield targets and existing prospects, within a 65km corridor which extends approximately 35km northwest and 30km southeast of the Minyari Dome development opportunity, being evaluated during the CY2026 Phase 1 drill programme (red shaded polygons). Note the location of AL01 north of Minyari, Tim's Dome southwest and Chicken Ranch south of Minyari. This structural domain hosts Greatland Resources Ltd's Telfer Mine and Havieron development project¹, and along trend to the northwest (off this map) are Rio Tinto-Sumitomo's Winu development project and Rio Tinto's Calibre and Magnum deposits. NB: Regional GDA2020 / MGA Zone 51 co-ordinates, 20km grid, over a grayscale aeromagnetic image.

¹ Telfer, Havieron and O'Callaghans refer to Greatland Resources Ltd ASX release dated 30 March 2026, "December 2025 Group Mineral Resource Statement".

MINYARI DOME

Thick high-grade mineralisation at the Minyari deposit and further Mineral Resource growth potential identified at GEO-01, WACA and Rizzo

Minyari Dome hosts the principal Mineral Resources underpinning Antipa's ongoing Pre-Feasibility Study (**PFS**), with a current Mineral Resource Estimate (**MRE**) containing 2.5Moz of gold, including 2.2Moz classified as Indicated, 87kt of copper and 729koz of silver.

Phase 1 CY2026 drilling is targeting extensions to existing gold-copper deposits and mineralised zones across the broader Minyari Dome area, particularly around GEO-01, Rizzo and adjacent prospects.

Batch 5 results have identified further opportunities for MRE growth, with extensional intersections at GEO-01 Main Zone, WACA and Rizzo (Figures 3 and 6 to 10).

Previously unsampled sections of a 2025 Minyari deposit "infill" diamond core hole were recently sampled for metallurgical test-work. Assays returned thick, high-grade mineralisation grading **up to 82.2 g/t gold and 2.9% copper**, with further results pending (Figures 3 to 4).

Minyari Deposit

Previously unsampled sections of diamond core hole 25MYD0540, drilled during CY2025, were sampled as part of preparations for Definitive Feasibility Study (**DFS**) metallurgical testwork. This hole's objective was to test a Minyari fold axis controlled target at depth beneath Minyari and the upper portion of the hole was not sampled last year.

The assays returned multiple zones of gold, copper and cobalt mineralisation, including thick, high-grade gold intervals. These results confirm the presence at Minyari of a shallow north plunging (25°) high-grade gold shoot identified by drill holes 15 to 40 metres away.

Notable results from 25MYD0540 include:

- **2m at 1.4 g/t gold, 0.82% copper and 1.3 g/t silver** from 24m, including:
 - **1m at 2.8 g/t gold, 1.55% copper and 2.4 g/t silver** from 25m
- **8m at 1.5 g/t gold and 0.22% copper** from 32m, including:
 - **1m at 10.6 g/t gold, 1.19% copper** and 1.2 g/t silver from 33m
- **22m at 8.2 g/t gold and 0.35% cobalt** from 100m, including:
 - **5.1m at 27.4 g/t gold** and **1.04% cobalt** from 107.9m
 - **0.8m at 12.8 g/t gold** and **0.27% cobalt** from 116.4m
 - **1m at 15.8 g/t gold** and **0.60% cobalt** from 120m

GEO-01 Main Zone

Diamond core drilling at GEO-01 Main Zone has intersected additional gold-copper mineralisation approximately 230m down dip from previously defined mineralisation, highlighting the potential for further extensions at depth.

Hole 26XMDD0555 returned:

- **2m at 1.5 g/t gold** from 421m, including:
 - **1m at 2.4 g/t gold** from 422m
- **26.6m at 1.4 g/t gold** and 0.04% copper from 640.4m, including:

- **18.9m at 1.8 g/t gold** and 0.06% copper from 644.1m, also including:
 - **9.6m at 2.9 g/t gold** and 0.08% copper from 650.8m
 - **2.4m at 7.4 g/t gold, 0.14% copper** and 1.4 g/t silver from 658m

WACA

Diamond core drilling at WACA has intersected further gold mineralisation approximately 80m down plunge to the north of the previously defined mineralised zone.

Hole 26XMDD0556 returned:

- **44m at 0.5 g/t gold** from 386m, including:
 - **21m at 0.8 g/t gold** from 386m, also including:
 - **1m at 2.1 g/t gold and 0.18% cobalt** from 387m
 - **3m at 2.7 g/t gold and 0.15% cobalt** from 399m

Rizzo

RC drilling at Rizzo has intersected additional near-surface and deeper gold-copper mineralisation, providing further targets for evaluating extensions to the existing deposit.

Notable intersections include:

- **12m at 1.3 g/t gold and 0.35% copper** from 70m in 26XMDC1006, including:
 - **2m at 5.4 g/t gold and 0.42% copper** from 72m
- **14m at 0.6 g/t gold** and 0.05% copper from 273m in 26XMDC1005, including:
 - **1m at 5.4 g/t gold and 0.16% copper** from 276m
- **2m at 3.0 g/t gold and 0.09% copper** from 65m in 26XMDC0997, including:
 - **1m at 5.8 g/t gold and 0.10% copper** from 65m
- **3m at 0.7 g/t gold and 0.08% copper** from 80m in 26XMDC0998, including:
 - **1m at 1.6 g/t gold and 0.16% copper** from 80m
- **42m at 0.3 g/t gold and 0.15% copper** from 4m in 26XMDC1000, including:
 - **2m at 0.9 g/t gold and 0.14% copper** from 6m
 - **1m at 2.6 g/t gold and 0.45% copper** from 31m
 - **1m at 0.8 g/t gold and 0.39% copper** from 39m
- **6m at 0.8 g/t gold, 0.35% copper and 9.6 g/t silver** from 124m in 26XMDC1001, including:
 - **1m at 3.1 g/t gold, 0.80% copper and 1.4 g/t silver** from 125m

TIM'S DOME

Further Mineralisation Defined Above and Adjacent to an AEM Conductor

Tim's Dome is a satellite gold deposit located 30km southwest of the standalone Minyari gold-copper development opportunity and 11km from Greatland Resources Ltd's Telfer gold-copper-silver mine and processing facility (Figures 1 and 2).

The deposit currently hosts a Mineral Resource containing 110koz gold (Figure 10). Tim's Dome occurs within stratigraphy correlated with key mineralised domains of the Telfer gold-copper-silver deposit and lies on the northwest strike continuation of the Telfer domal fold structure.

Gold and copper mineralisation has been identified over approximately 4.7km of strike, mainly along the domes fold axis and western fold limb.

Phase 1 CY2026 drilling has identified multiple new mineralised zones over approximately 2.2km of strike along the eastern fold limb, offering new Mineral Resource potential in this “Eastern Zone” (Figures 10 to 14).

Phase 1 RC and diamond core drilling programme, which is nearing completion, focussed on testing:

- a 1.2 km long bedding parallel AEM conductivity anomaly (Figure 11);
- gold anomalies generated by the 2025 air core drilling; and
- potential extensions to the existing Tim’s Dome Mineral Resource.

Batch 5 assays returned further gold±copper±lead±silver mineralisation, including thick, low-grade copper zones, over approximately 600m of strike above and adjacent to the AEM conductor target. The conductor’s upper surface is interpreted to lie approximately 270m to 340m below surface. Diamond core drilling is being completed to assess its significance.

Maximum Tim’s Dome 1m RC grades returned from Batch 5 RC results were 10.1 g/t gold, 2.51% copper, 1.47% lead and 6.43 g/t silver.

Notable Batch 5 Tim’s Dome intersections include:

- **9m at 1.5 g/t gold, 0.11% copper and 0.53% lead** from 178m in 26XTDC0081, including:
 - **2m at 3.2 g/t gold, 0.26% copper and 1.29% lead** from 184m
- **6m at 2.1 g/t gold and 0.12% copper** from 186m in 26XTDC0083, including:
 - **2m at 3.3 g/t gold and 0.15% copper** from 187m
- **8m at 1.7 g/t gold** and 0.04% copper from 192m in 26XTDC0084, including:
 - **1m at 10.1 g/t gold, 0.16% copper and 2.1 g/t silver** from 192m
- **51m at 0.24% copper** from 241m in 26XTDC0080, including:
 - **25m at 0.43% copper** from 267m, also including:
 - **2m at 0.1 g/t gold, 1.10% copper and 4.2 g/t silver** from 273m
 - **2m at 0.93% copper, 0.41% lead and 0.11% zinc** from 278m
 - **1m at 0.1 g/t gold, 1.09% copper, 0.20% lead, 0.19% zinc and 0.14% cobalt** from 286m
 - **2m at 0.1 g/t gold, 1.70% copper, 0.10% zinc and 0.22% cobalt** from 289m
- **3m at 0.8 g/t gold** from 91m in 26XTDC0082, including:
 - **1m at 1.8 g/t gold** from 93m
- **4m at 1.0 g/t gold** from 147m in 26XTDC0082, including:
 - **1m at 3.3 g/t gold** from 147m

The results build on previous Phase 1 intersections and support the interpretation of multiple mineralised zones along the eastern limb of Tim’s Dome.

An AEM conductor is situated beneath and adjacent to zones of gold-copper-lead-silver mineralisation identified by RC drilling. Its geological significance remains to be established.

Diamond core drilling from surface is being completed to test the conductor directly and better understand the relationship between the conductor and surrounding mineralisation. The programme is supported by a A\$180k, Western Australian Government Exploration Incentive Scheme (**EIS**) grant.

CHICKEN RANCH

Shallow gold intersections identify additional targets outside of the current Resource boundary

Chicken Ranch is a satellite gold deposit located approximately 25km south of the Minyari Project and 15km northeast of Greatland Resources Ltd's Telfer gold-copper-silver mine and processing facility (Figures 1 and 2).

The deposit currently hosts a MRE containing 49koz gold (Figure 15). Gold mineralisation at Chicken Ranch extends over approximately 1.3km of strike, mainly within a 90 to 220m wide western corridor.

Phase 1 2026 air core drilling has principally targeted areas east and north of this corridor, testing for extensions to existing mineralisation and additional shallow gold-bearing zones.

Batch 5 assays from 79 air core holes have identified multiple areas of gold mineralisation, including locally high-grade intersections outside the primary Mineral Resource boundary (Figures 15 to 18).

Maximum Chicken Ranch 1m RC grades returned from Batch 5 RC results were 18.7 g/t gold, 0.07% copper and 1.8 g/t silver.

Notable assay results include:

- **14m at 2.1 g/t gold** from 40m in 26XCRA0228, including:
 - **2m at 13.0 g/t gold** from 48m, also including:
 - **1m at 18.7 g/t gold** from 49m
- **14m at 0.8 g/t gold** from 18m in 26XCRA0218, including:
 - **3m at 2.8 g/t gold** from 22m
- **2m at 2.8 g/t gold** from 10m in 26XCRA0227, including:
 - **1m at 5.2 g/t gold** from 11m
- **8m at 0.5 g/t gold** from 40m in 26XCRA0202, including:
 - **4m at 1.0 g/t gold** from 40m
- **11m at 0.4 g/t gold** from 48m in 26XCRA0197
- **19m at 0.3 g/t gold** from 48m in 26XCRA0203, including:
 - **9m at 0.6 g/t gold** from 52m
- **40m at 0.2 g/t gold** from 0m in 26XCRA0217, including:
 - **8m at 0.7 g/t gold** from 0m
- **4m at 0.5 g/t gold** from 46m in 26XCRA0219, including:
 - **1m at 1.5 g/t gold** from 46m

The intersections identify additional mineralised areas that remain open along strike and at depth. Assay results are pending for a further eight Phase 1 air core holes.

PHASE 1 CY2026 DRILLING PROGRAMME OUTLINE

The Phase 1 CY2026 programme was scheduled to comprise 321 holes for 41,000m, incorporating air core, RC and diamond core drilling.

The programme has two principal objectives:

- **Resource growth:** Extend known gold-copper mineralisation across the Minyari Dome deposit group, particularly in areas surrounding GEO-01 and Rizzo; and
- **New discoveries:** Systematically test priority gold and copper targets across the broader Minyari Project, including Tim's Dome, AL01 and other prospective areas.

A total of **330 Phase 1 drill holes for 42,248m have been completed to date**, comprising 116 RC holes (25,214m), 208 air core holes (14,244m) and five diamond core holes (2,790m).

The air core component of Phase 1 has been completed, with drilling undertaken across AL01, the Yolanda Trend, Chicken Ranch, Parklands and Jezabeel.

RC drilling has tested multiple gold-copper targets around Minyari Dome, together with regional targets including Tim's Dome and has recently commenced at AL01.

Diamond core drilling has been completed at several Minyari Dome targets and is ongoing at Tim's Dome.

The programme is funded from Antipa's existing cash, supplemented by applicable EIS grants.

NEXT STEPS

Antipa's exploration activities will remain focused on progressing priority Mineral Resource growth and new discovery opportunities across the Minyari Project.

Near-term activities include:

- **Tim's Dome:** Complete diamond core drilling targeting testing the AEM conductor and assess the results alongside the eastern limb gold-copper mineralisation identified by RC drilling.
- **AL01:** Continue follow-up RC drilling of gold-copper targets generated by the completed air core programme.
- **Minyari Dome:** Continue geological interpretation of extensional drilling results at GEO-01 Main Zone, WACA, Rizzo and other priority deposits to guide further Resource growth drilling.
- **Chicken Ranch:** Integrate outstanding air core assays and prioritise areas for follow-up.

The Company continues to advance its broader Minyari development activities in parallel with exploration, including the ongoing PFS for the Minyari Dome gold-copper development opportunity.

Antipa will provide further updates as drilling progresses and additional assay results are received.

Release authorised by


Roger Mason
Managing Director and CEO

For further information, please visit or contact:

Mark Rodda
 Executive Chairperson
 Antipa Minerals Ltd
 +61 (0)8 9481 1103

Roger Mason
 Managing Director and CEO
 Antipa Minerals Ltd
 +61 (0)8 9481 1103

Michael Vaughan
 Media Relations
 Fivemark Partners
 +61 (0)422 602 720



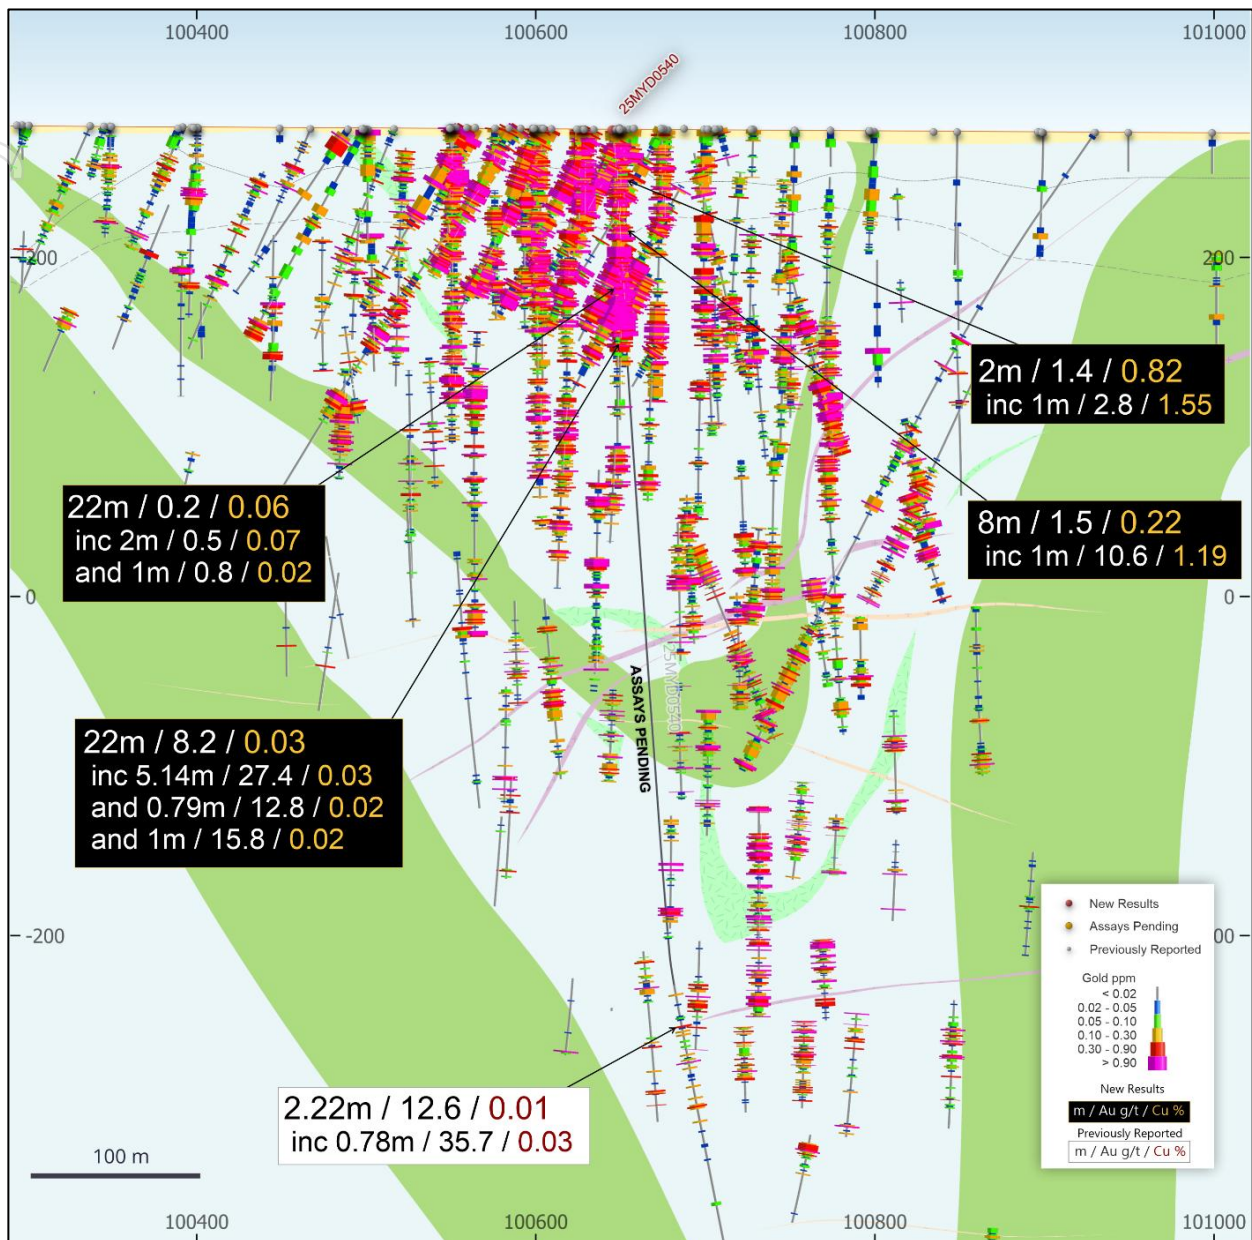


Figure 4: Minyari deposit 50,275mE (Southeast-Northwest) long-section: Showing 25MYD0540 drill hole gold-copper intercepts (Assay Batch 5 black boxes). NB: Refer to Figures 2 and 3 for location information. NB: Minyari local grid co-ordinates, 200m grid, section window ± 25 m.

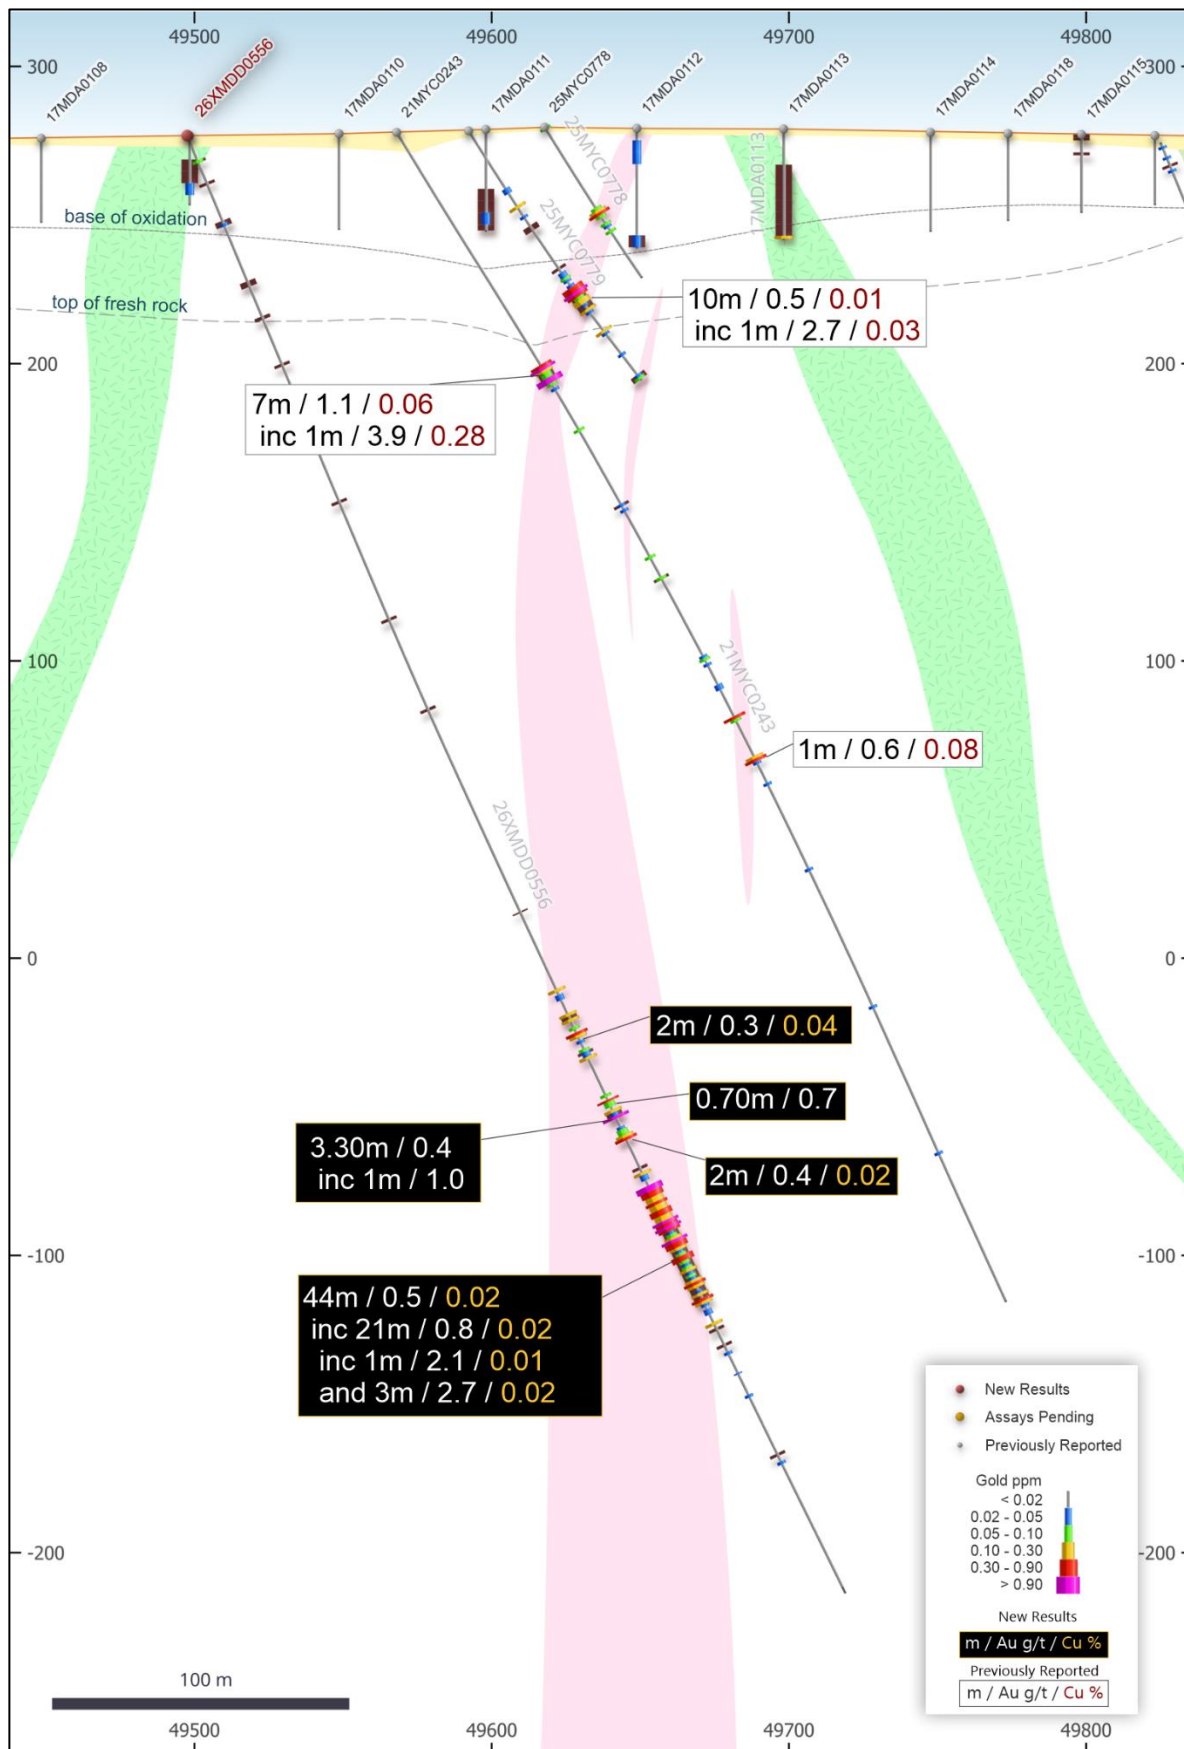


Figure 5: WACA deposit 100,250mN (east-west) cross-section: Showing 26XMD0556 drill hole gold-copper intercepts (**Assay Batch 5 black boxes**). NB: Refer to Figures 2 and 3 for location information. NB: Minyari local grid co-ordinates, 100m grid.

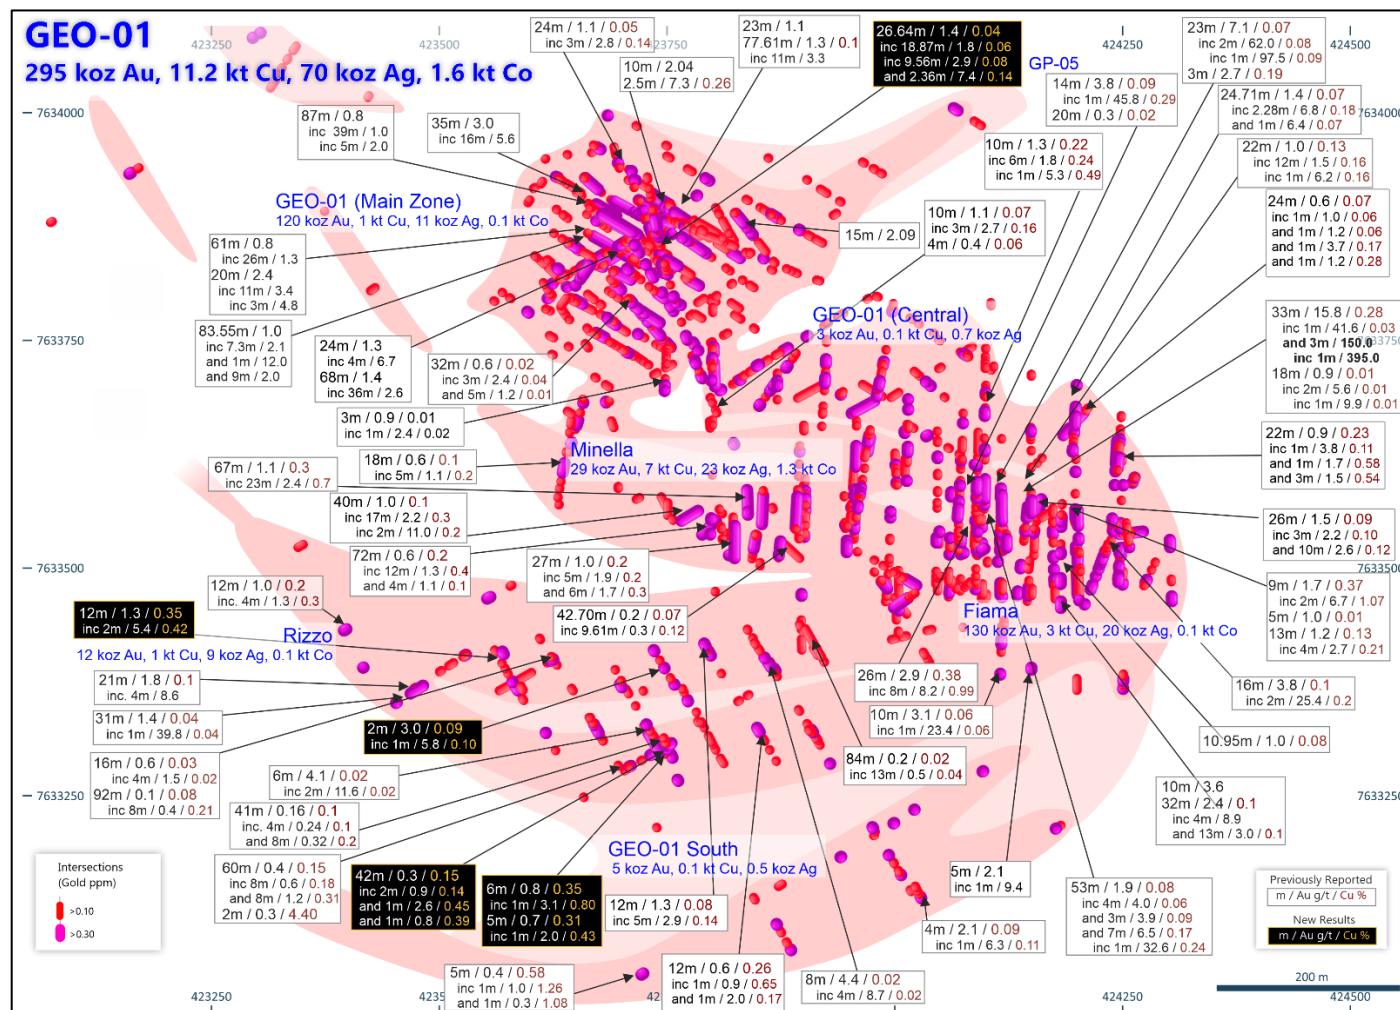


Figure 6: GEO-01 Main Zone, Fama, Minella, GEO-01 Central deposits and southern Rizzo-GEO-01 South discovery region plan view showing gold ± copper drill annotation and intersections (Assay Batch 5 black boxes) and interpreted mineralisation envelopes: Folded and faulted hard/brittle quartzite and mafic (dolerite) intrusives are preferentially mineralised. Multiple zones of mineralisation remain open, including high-grade, with highly prospective Rizzo GEO-01 South folded dolerite and meta-sediment strike length 500 to 800m, and an across-strike width of 120 to 160m. NB: Regional GDA2020 / MGA Zone 51 co-ordinates and 250m grid.

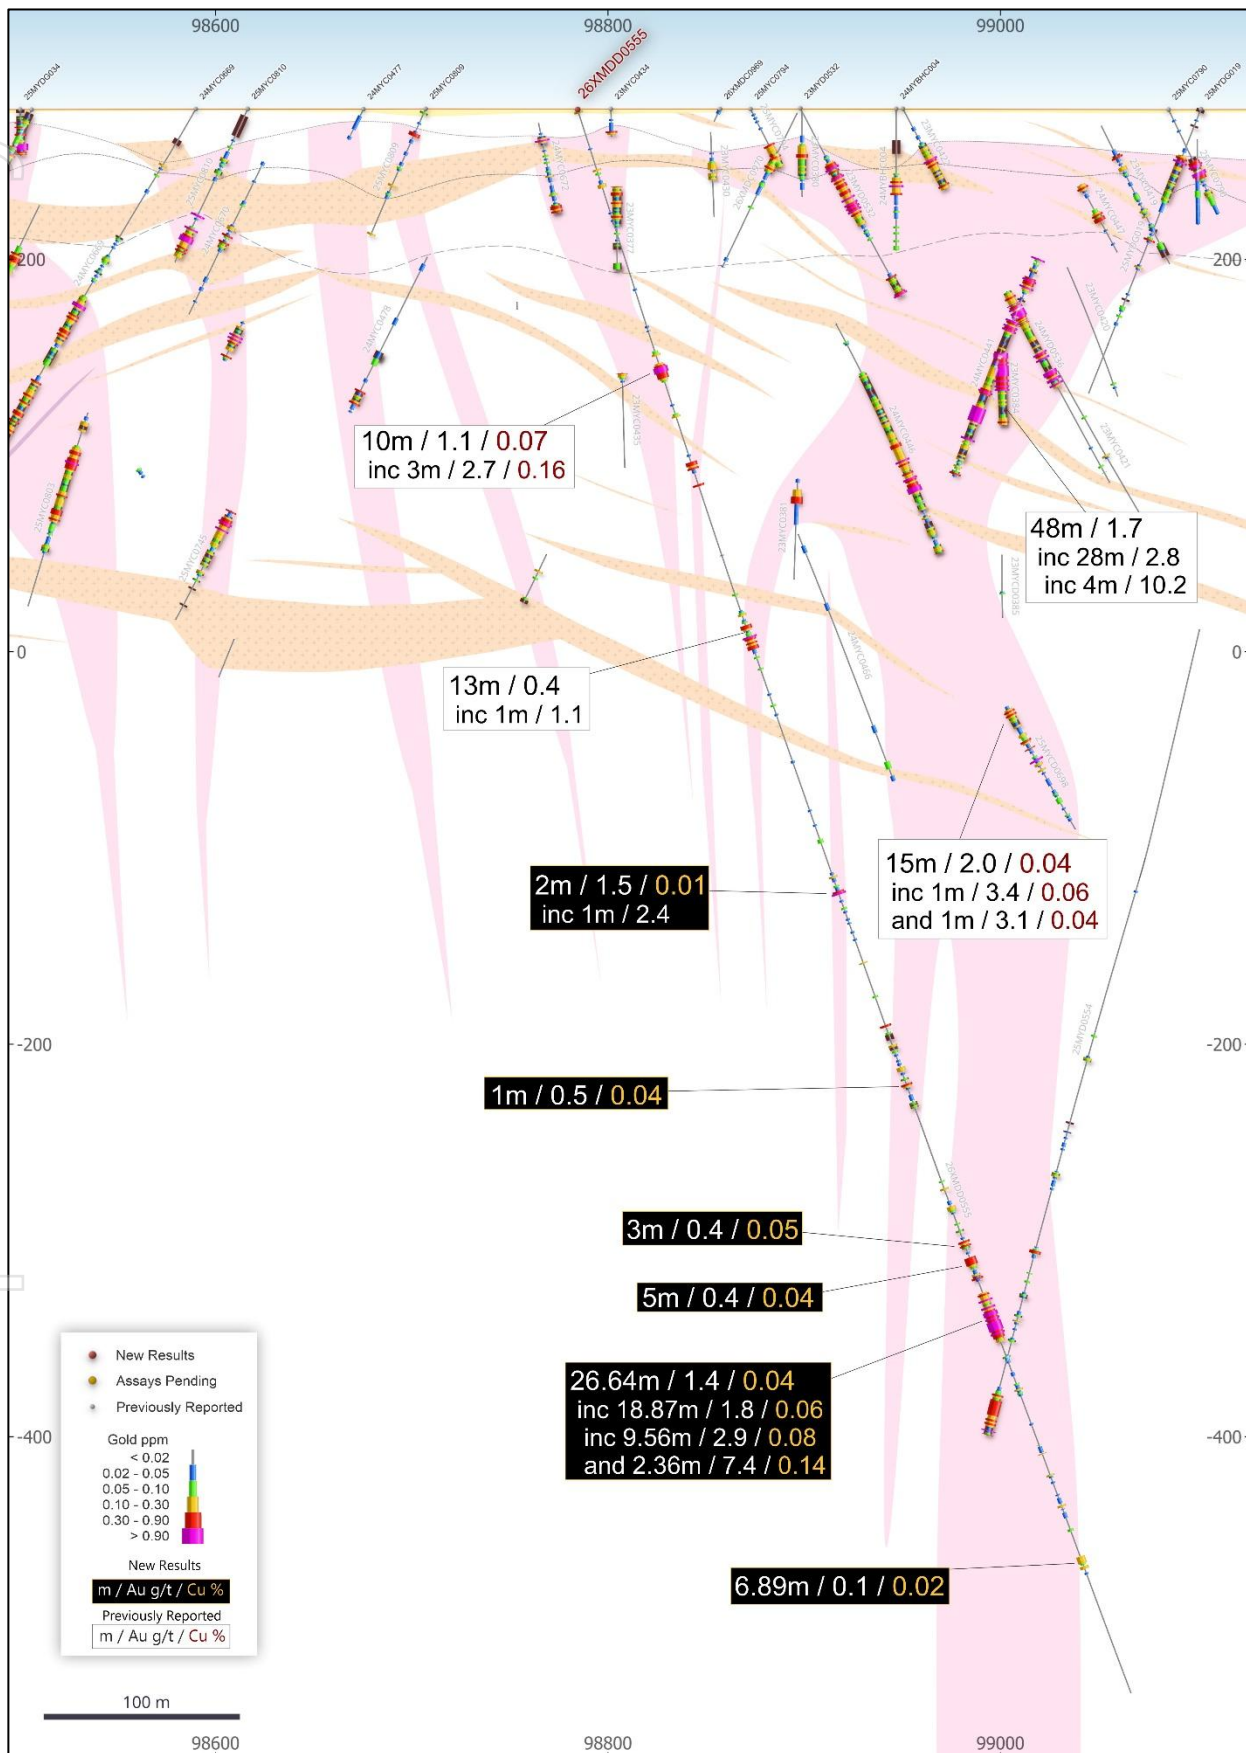


Figure 7: GEO-01 Main Zone deposit 50,075mE (Southwest-Northeast) cross-section: Showing Phase 1 26XMDD0555 drill hole gold-copper intercepts (Assay Batch 5 black boxes) . NB: Refer to Figures 2, 3 and 6 for location information. Minyari local grid co-ordinates, 200m grid.

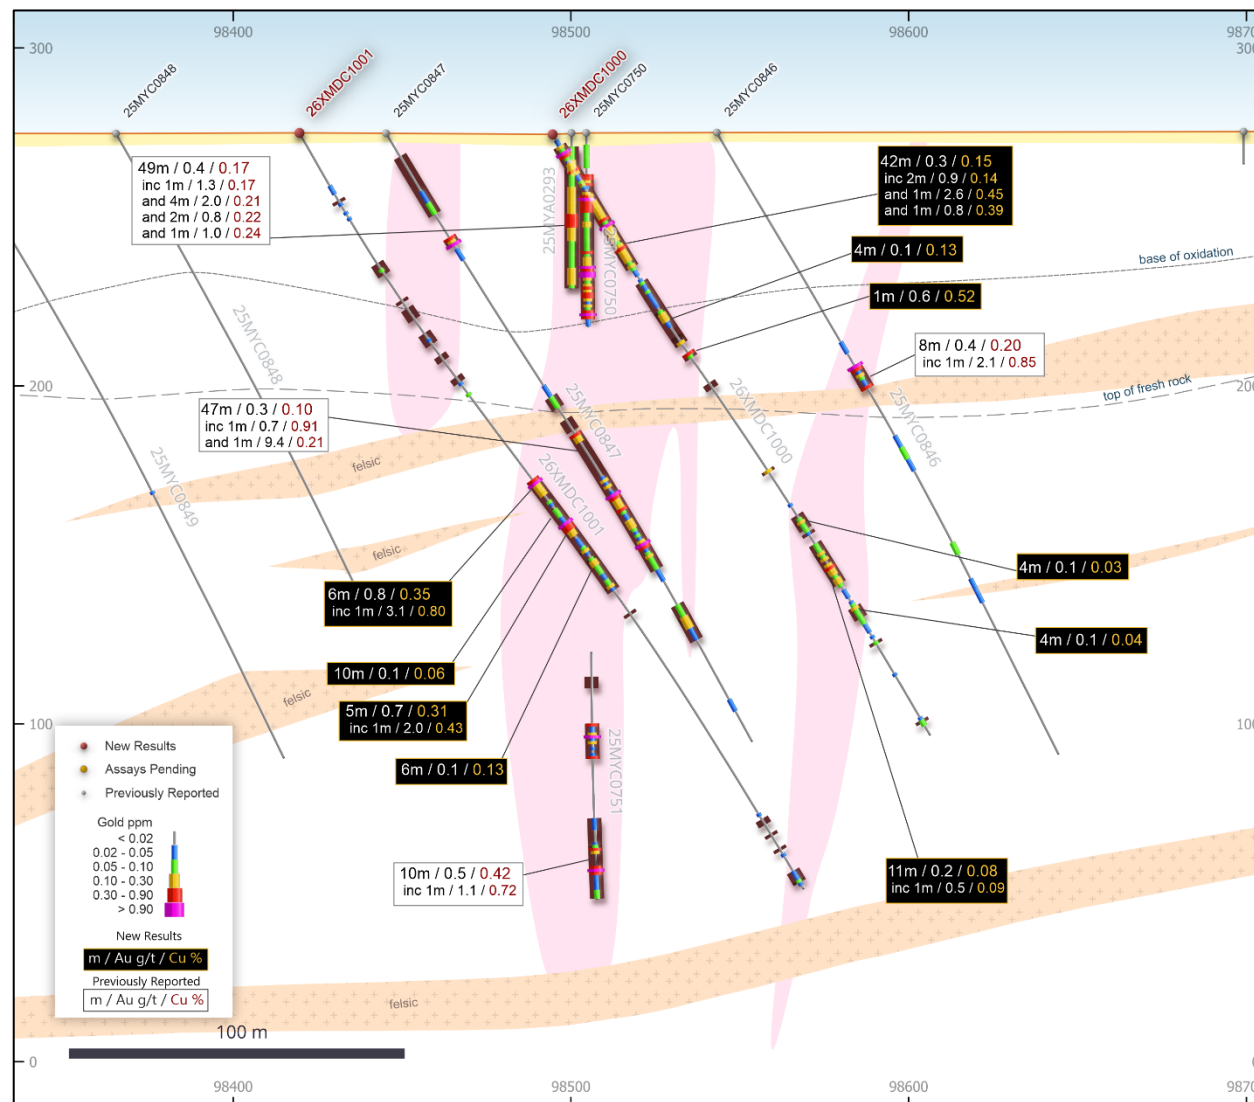


Figure 8: GEO-01 Rizzo deposit 49,775mE (North-South) cross-section: Showing Phase 1 drill hole gold-copper intercepts (**Assay Batch 5 black boxes**). NB: Refer to Figures 2, 3 and 6 for location information. Minyari local grid co-ordinates, 100m grid.

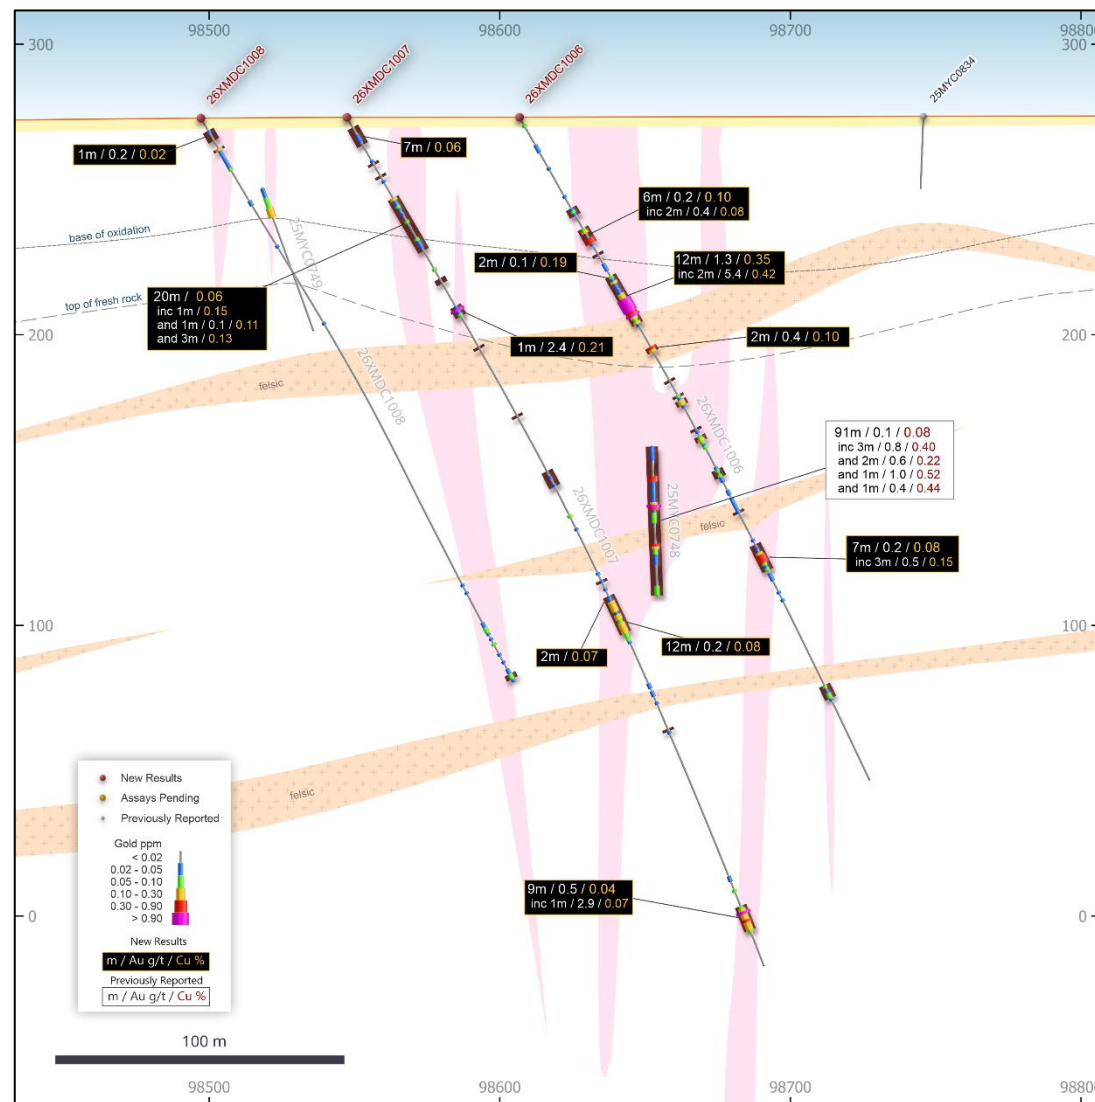


Figure 9: GEO-01 Rizzo deposit 49,675mE (North-South) cross-section: Showing Phase 1 drill hole gold-copper intercepts (**Assay Batch 5 black boxes**) . NB: Refer to Figures 2, 3 and 6 for location information. Minyari local grid co-ordinates, 100m grid.

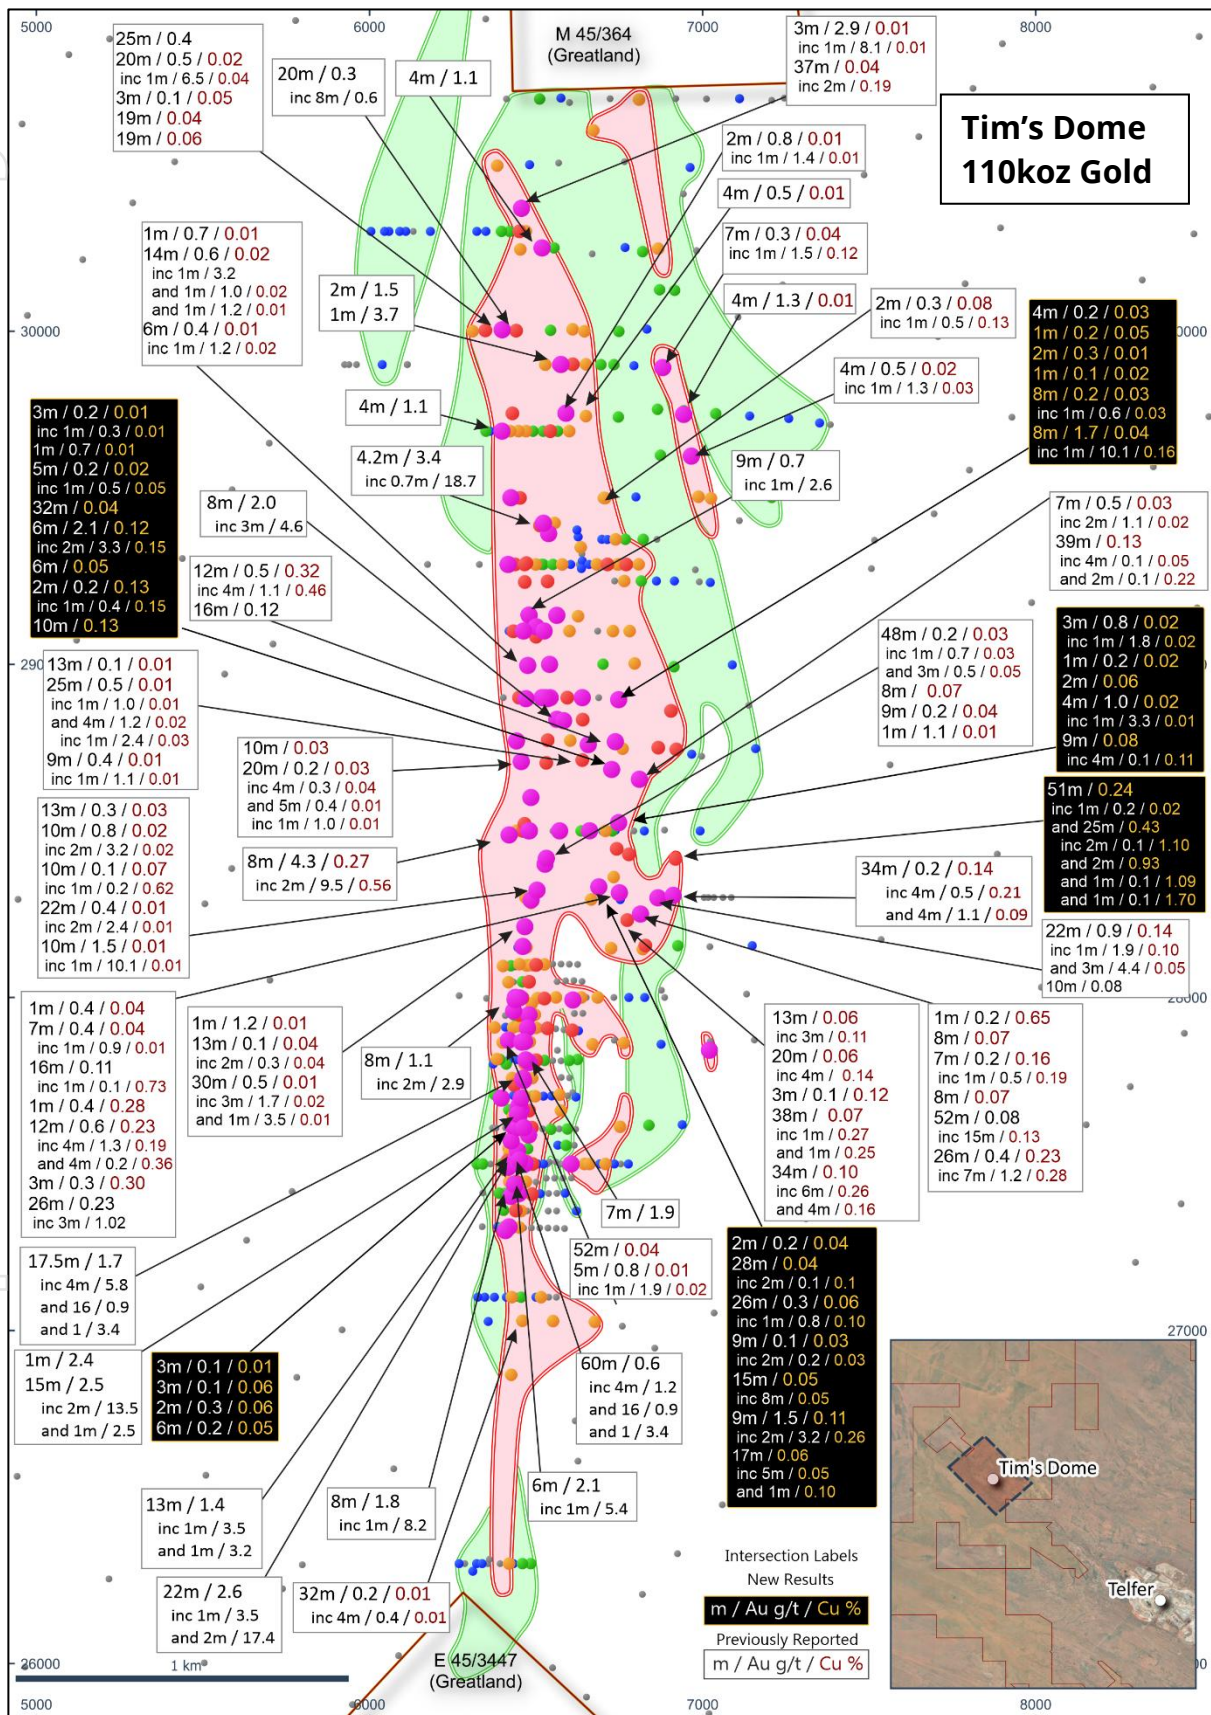


Figure 10: Map showing the Tim's Dome area, including Mineral Resource, contoured maximum down-hole gold drill results and key drill hole gold-copper intercepts (Assay Batch 5 black boxes). NB: Refer to Figures 1 and 2 for location information and Tim's Dome local grid co-ordinates, 1km grid.

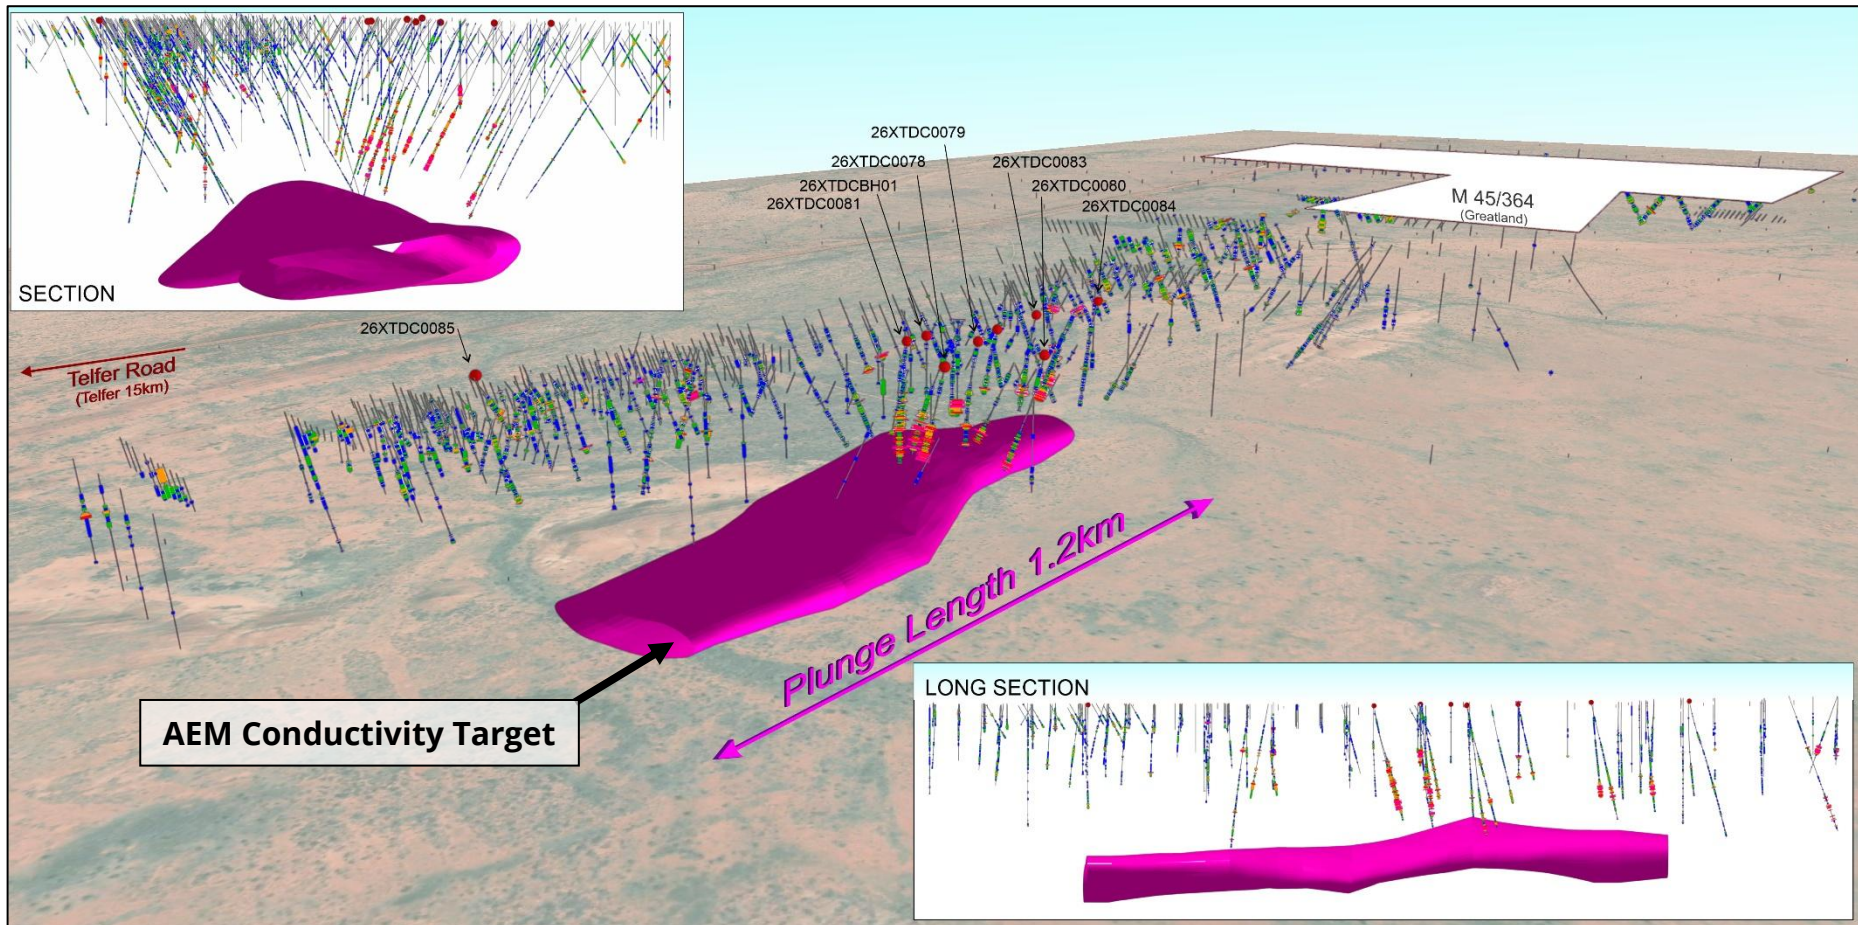


Figure 11: Tim's Dome 3D-perspective (oblique) long-section showing the untested 1.2km long AEM conductivity model (magenta) reef style high-grade gold-copper target: This discrete AEM conductivity anomaly is 270 to 340m below the surface and is also consistent with a Gradient Array Induced Polarisation (GAIP) chargeability anomaly. The Telfer Main Dome mineralisation is preferentially developed along the domal fold axis and eastern fold limb; with bedding parallel high-grade reefs preferentially located where steep cross-cutting ore fluid conduit structures intersect reactive lithologies/contacts. This AEM conductivity anomaly overlaps the Tim's Dome fold axis and is predominantly located within the eastern fold limb of the dome. Refer also to cross-sections Figures 12 and 14, and Figures 1, 2 and 10 for location information. View bearings for 3D-perspective image -35° to 270° and inset cross-section 0° to 320° and inset long-section 0° to 225°. NB: Tim's Dome Local Grid.

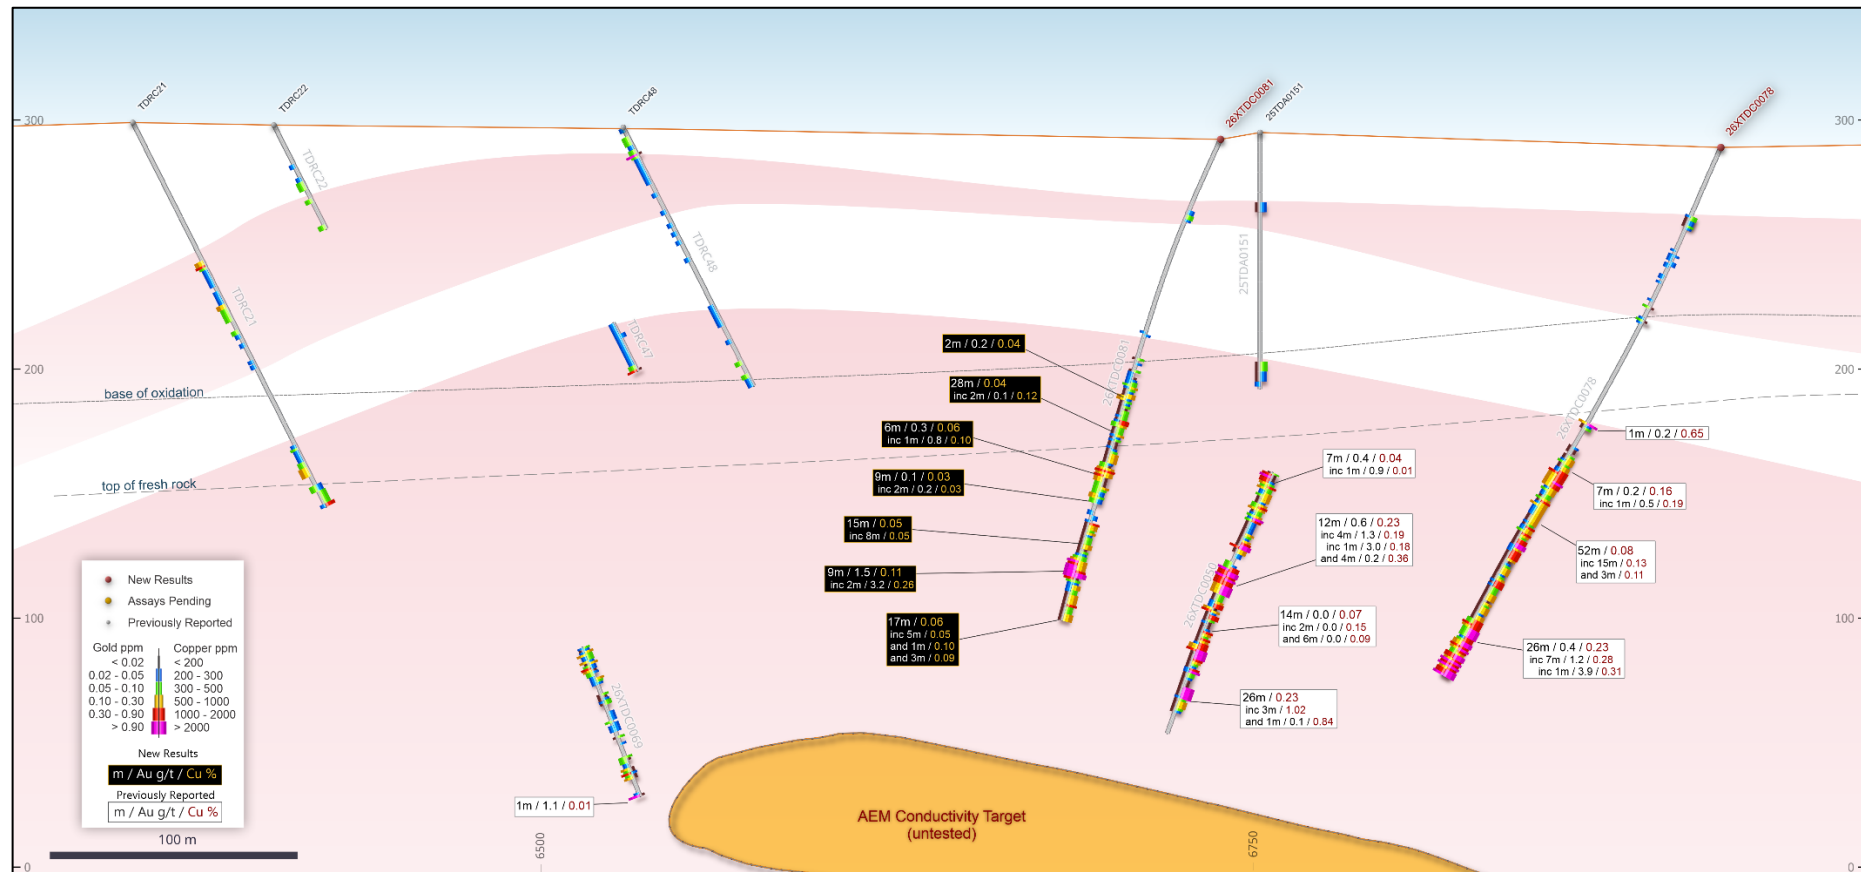


Figure 12: Tim's Dome deposit 28,200mN (Southeast-Northwest) cross-section: Showing drill hole gold-copper-lead intercepts (**Assay Batch 5 black boxes**) including for 26XTDC0081 which intersected thick gold±copper-lead-silver mineralisation on the eastern limb of Tim's Dome which remains open in multiple directions. NB: Refer to Figures 10 and 11 for location information. Tim's Dome local grid co-ordinates with a 100m easting grid and 100m elevation (RL) grid and cross-section view bearing 0° to 030°.

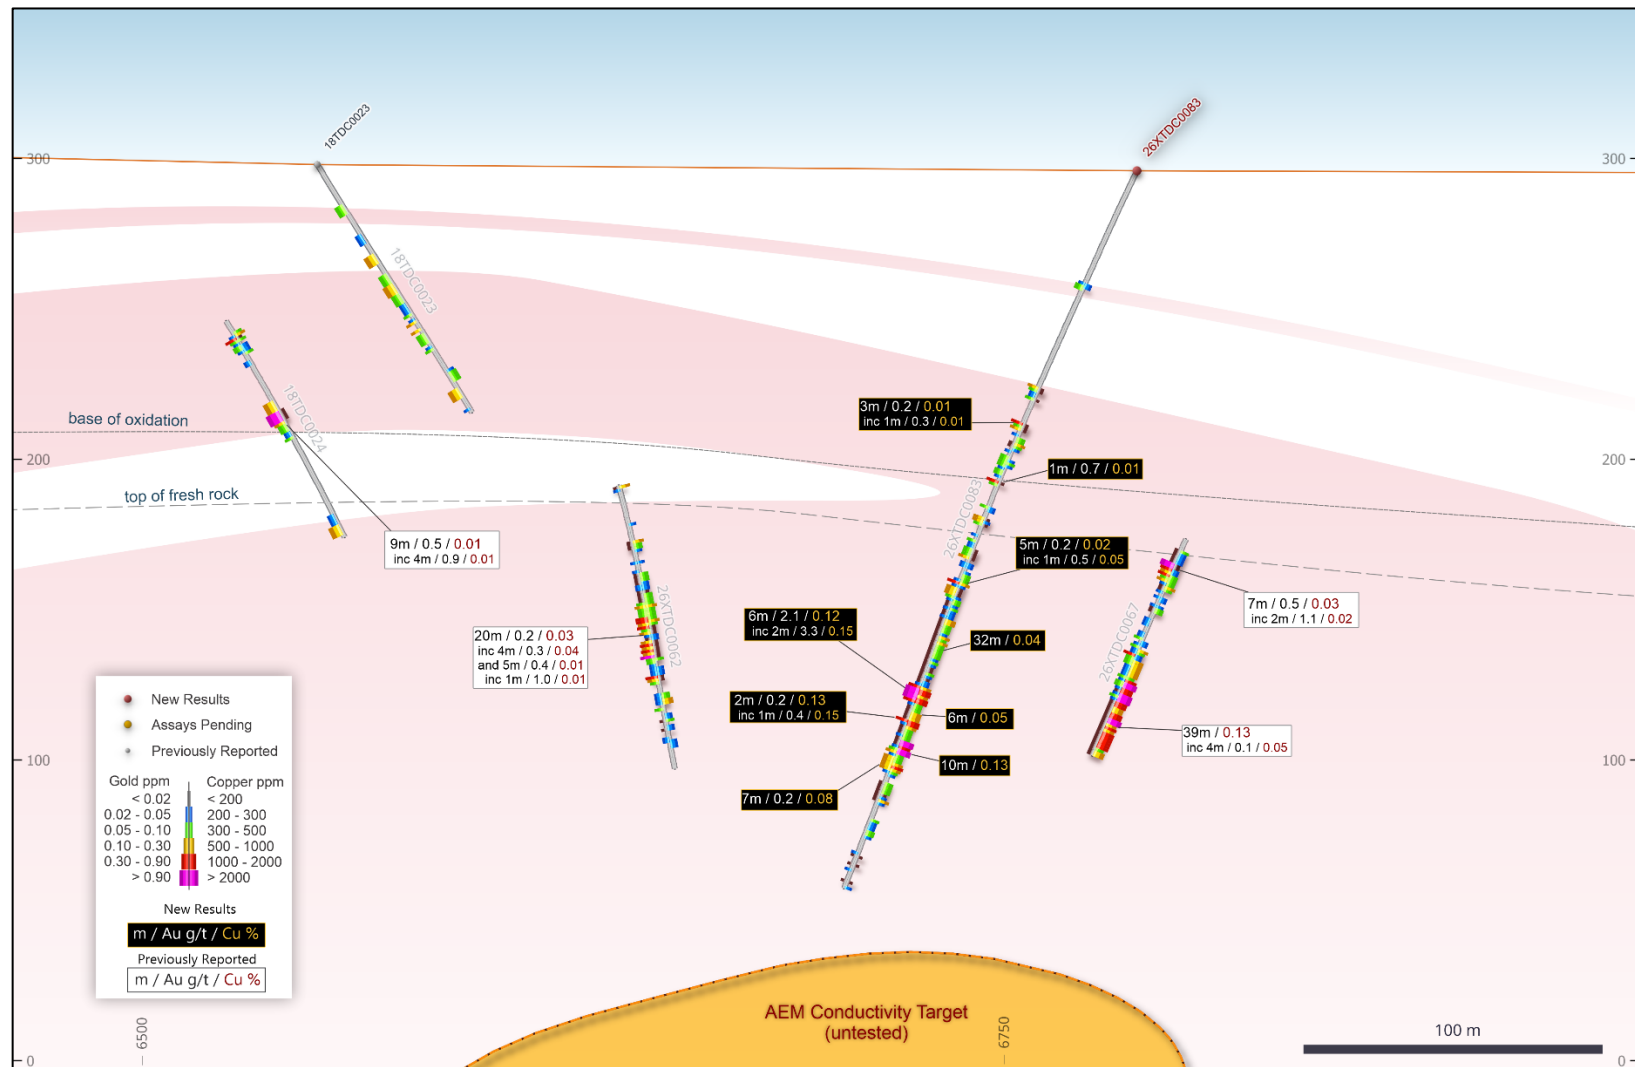
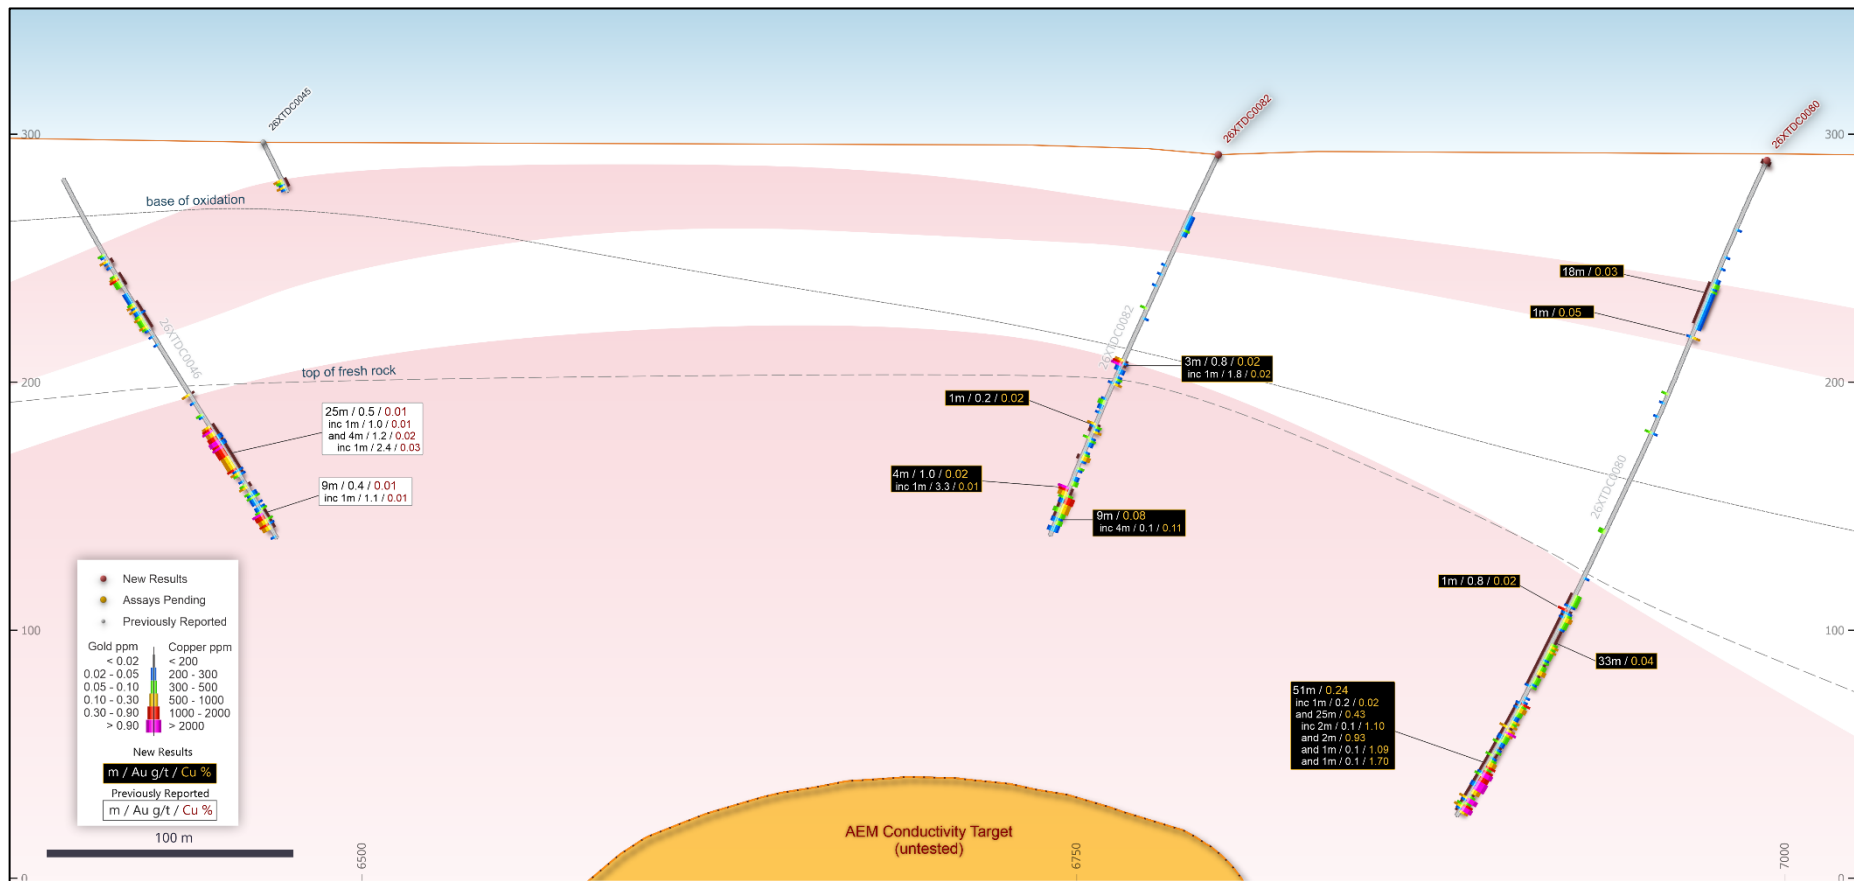


Figure 13: Tim's Dome deposit 28,450mN (Southeast-Northwest) cross-section: Showing drill hole gold-copper-lead intercepts (**Assay Batch 5 black boxes**) including for 26XTDC0083 which intersected thick low-grade copper mineralisation on the eastern limb of Tim's Dome which remains open. NB: Refer to Figures 10 and 11 for location information. Tim's Dome local grid co-ordinates with a 100m easting grid and 100m elevation (RL) grid and cross-section view bearing 0° to 030°.



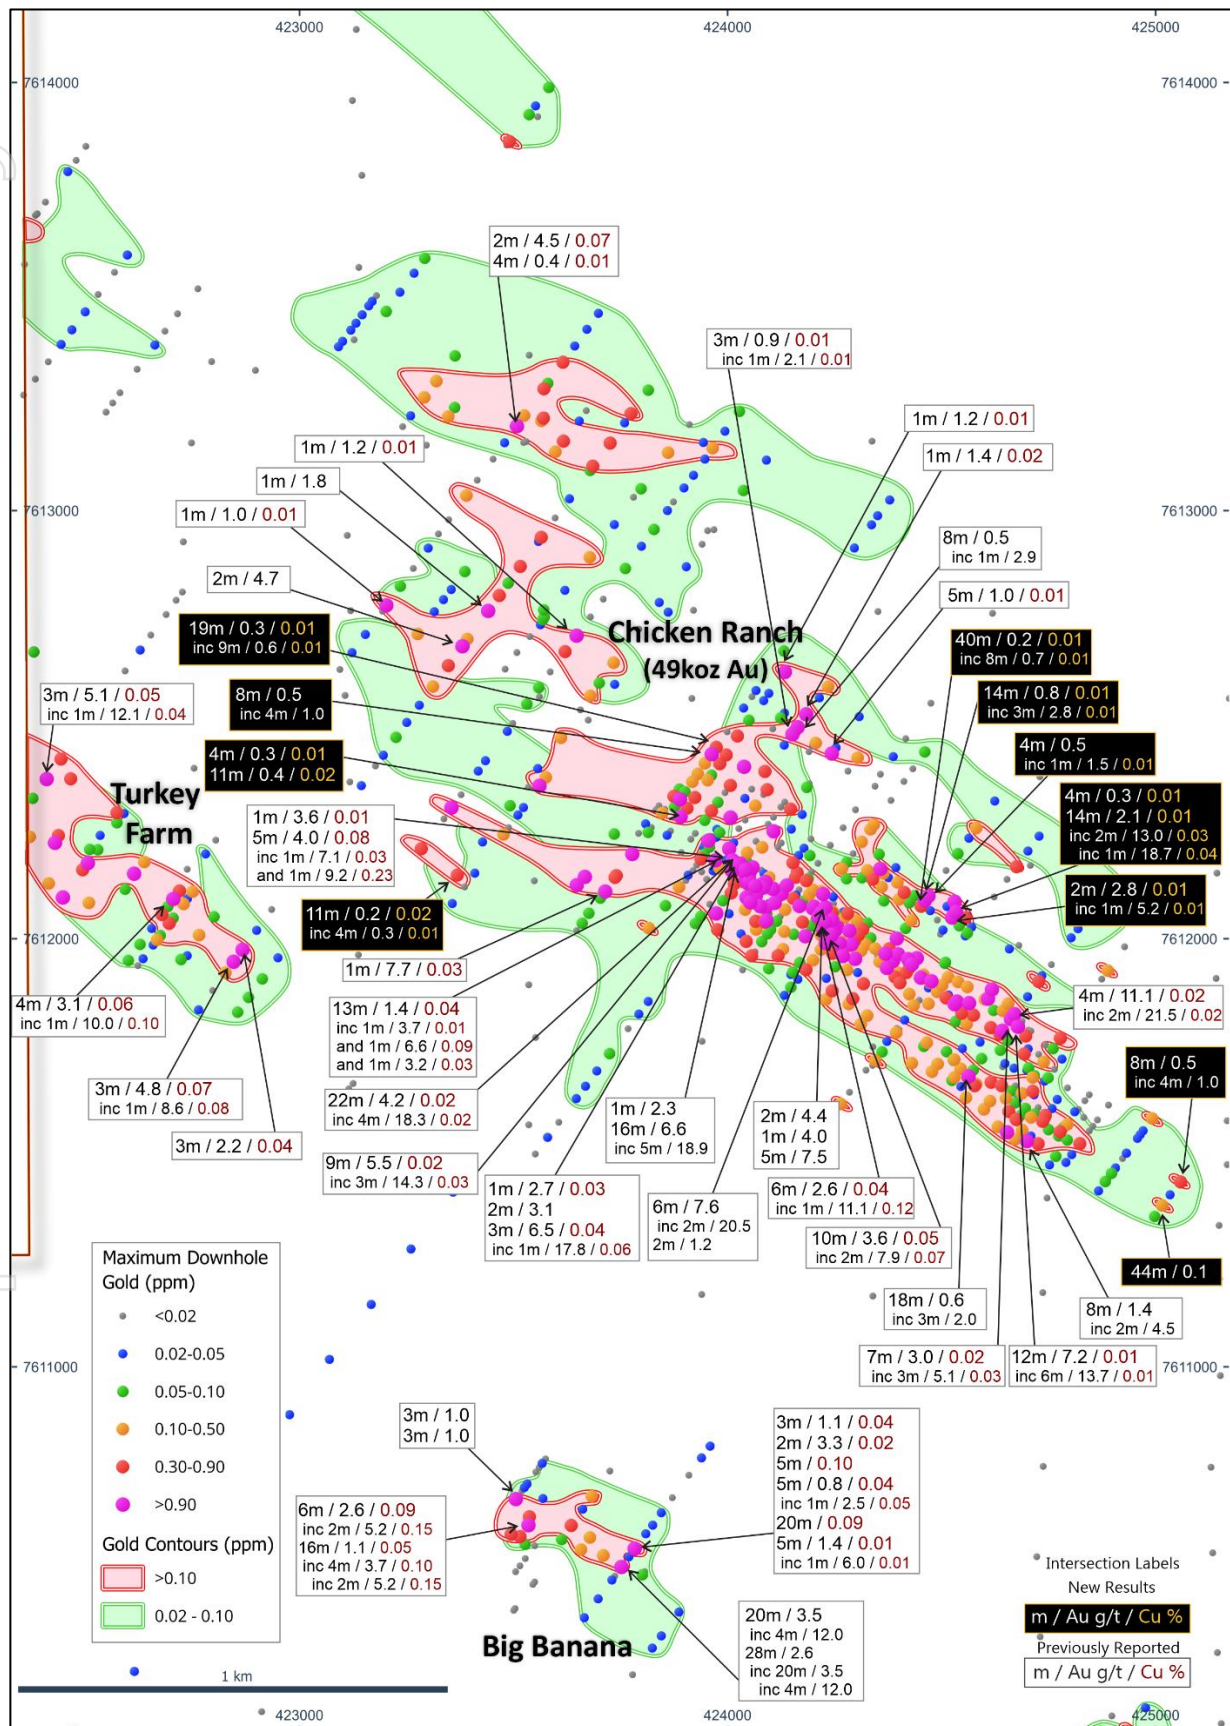


Figure 15: Map showing the Chicken Ranch area, including Mineral Resource, contoured maximum down-hole gold drill results and key drill hole gold-copper intercepts (Assay Batch 5 black boxes). NB: Refer to Figures 1 and 2 for location information and Regional GDA2020 / MGA Zone 51 co-ordinates, 1km grid.

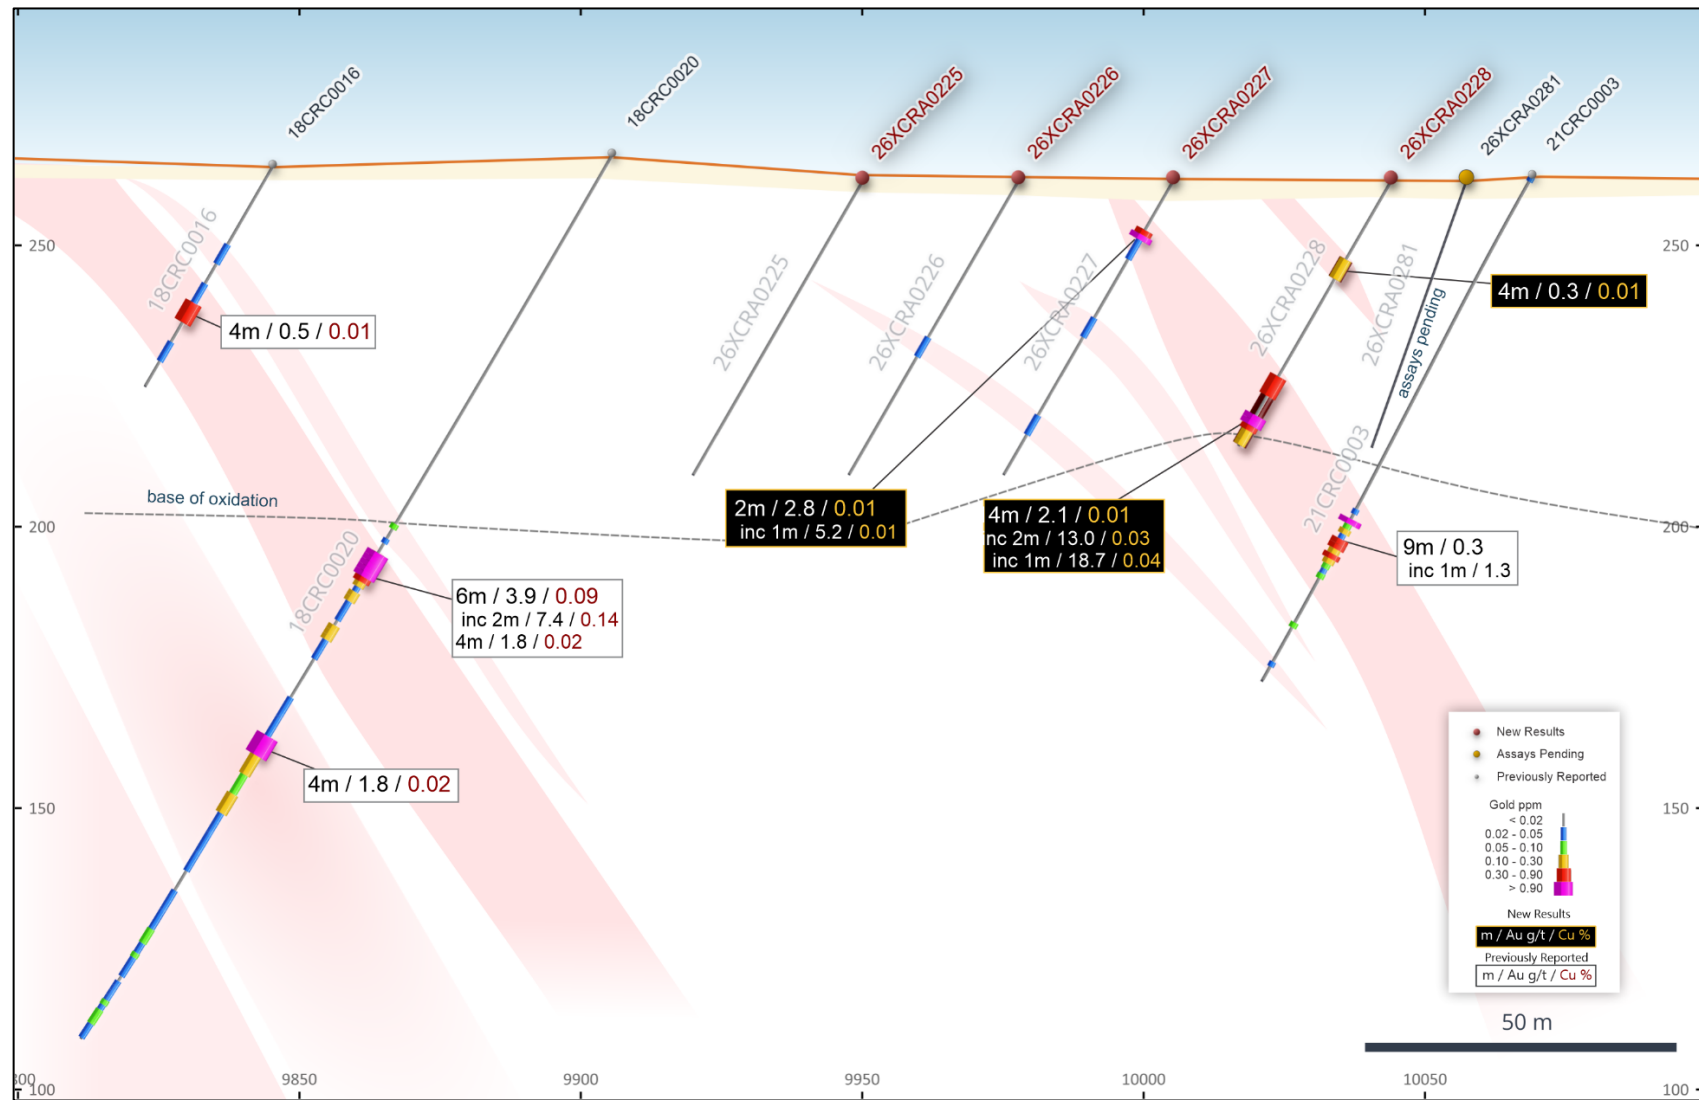
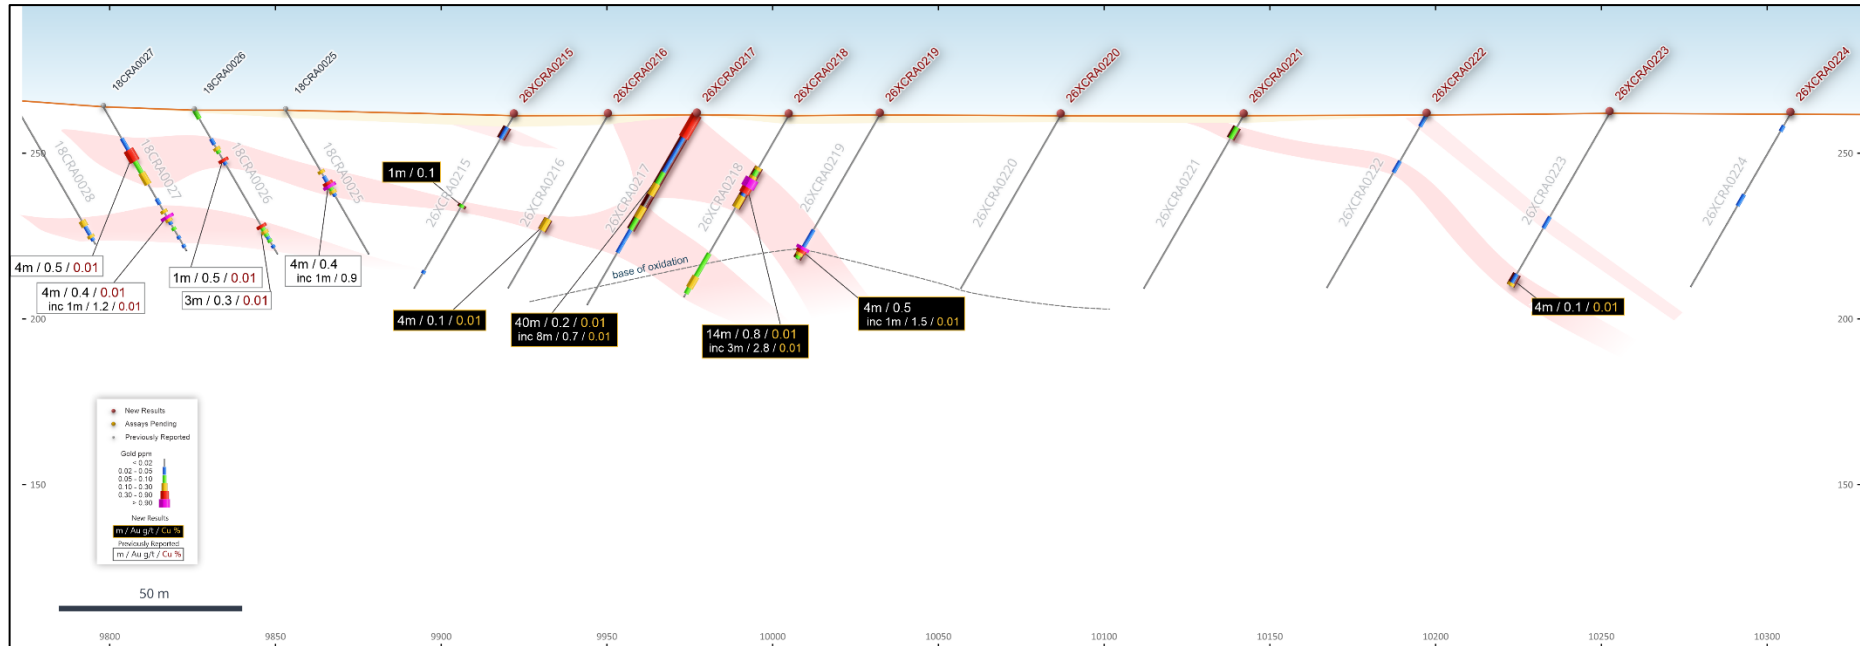


Figure 16: Chicken Ranch deposit 6,075mN (Southwest-Northeast) cross-section: Showing Phase 1 air core drill hole gold-copper intercepts (**Assay Batch 5 black boxes**). NB: Refer to Figure 15 for location information. Chicken Ranch local grid co-ordinates with a 50m easting grid and 50m elevation (RL) grid.



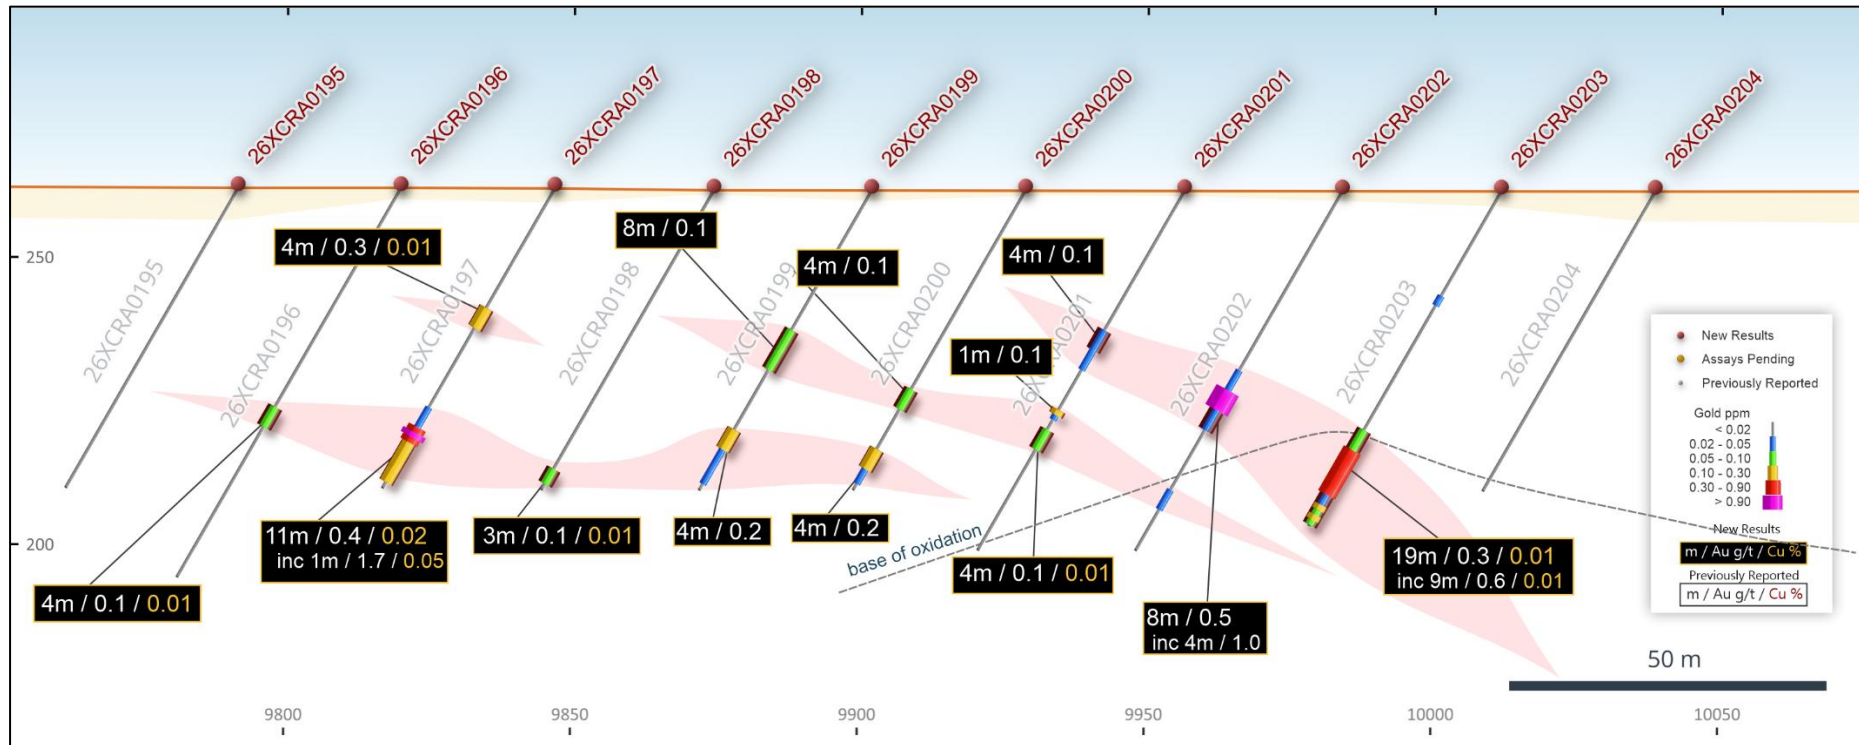


Figure 18: Chicken Ranch deposit 6,825mN (Southwest-Northeast) cross-section: Showing Phase 1 air core drill hole gold-copper intercepts (**Assay Batch 5 black boxes**). NB: Refer to Figure 17 for location information. Chicken Ranch local grid co-ordinates with a 50m easting grid and 50m elevation (RL) grid.


About Antipa Minerals Ltd

Antipa Minerals Ltd (ASX: **AZY**) (Antipa or the **Company**) is a leading mineral exploration company with a proven track record of discovering world-class gold-copper deposits in the highly prospective Paterson Province of Western Australia. The Company remains focussed on advancing its exploration and development programmes to unlock the full potential of this richly endowed region, which offers substantial opportunities for profitable mining operations. Antipa's tenement holding, known as the **Minyari Project**, covers approximately 3,840km² and host total 100%-owned Mineral Resources of 2.9 million ounces (**Moz**) of gold, 91,000 tonnes (**t**) of copper, 880 thousand ounces (**koz**) of silver and 13,000 tonnes of cobalt, situated in a region home to Greatland Resources' Telfer mine and 22Mtpa processing facility, as well as large scale gold-copper-silver development projects including Rio Tinto-Sumitomo's Winu and Greatland's Havieron.

Antipa's exploration success at Minyari includes the discovery of several significant mineral deposits at its flagship Minyari Dome Gold-Copper precinct. Minyari Dome, which forms the basis of the ongoing Pre-Feasibility Study, currently hosts a 2.5 Moz gold Mineral Resource at 1.5 grams per tonne (**g/t**) plus copper, silver, and cobalt (**April 2026**). An October 2024 Updated Scoping Study for Minyari Dome indicated the potential for a substantial standalone development opportunity with further upside potential. This year's Minyari Dome drilling programmes were aimed at further rapid and substantial growth of the existing gold-copper resources at Minyari Dome and were designed to enhance the value of the current development opportunity while also targeting new significant gold-copper discoveries.

At a regional level, Minyari provides access to further tier one gold-copper discovery opportunities. Significant discovery and resource growth drill programmes are envisaged to test a host of exciting high-potential gold ± copper prospects and greenfield targets primed for follow-up or initial drill testing.

Antipa is well-positioned to continue its resource growth and project development trajectory targeting significant value creation for its shareholders through focussed exploration and sensible development in one of the world's most promising gold-copper regions.

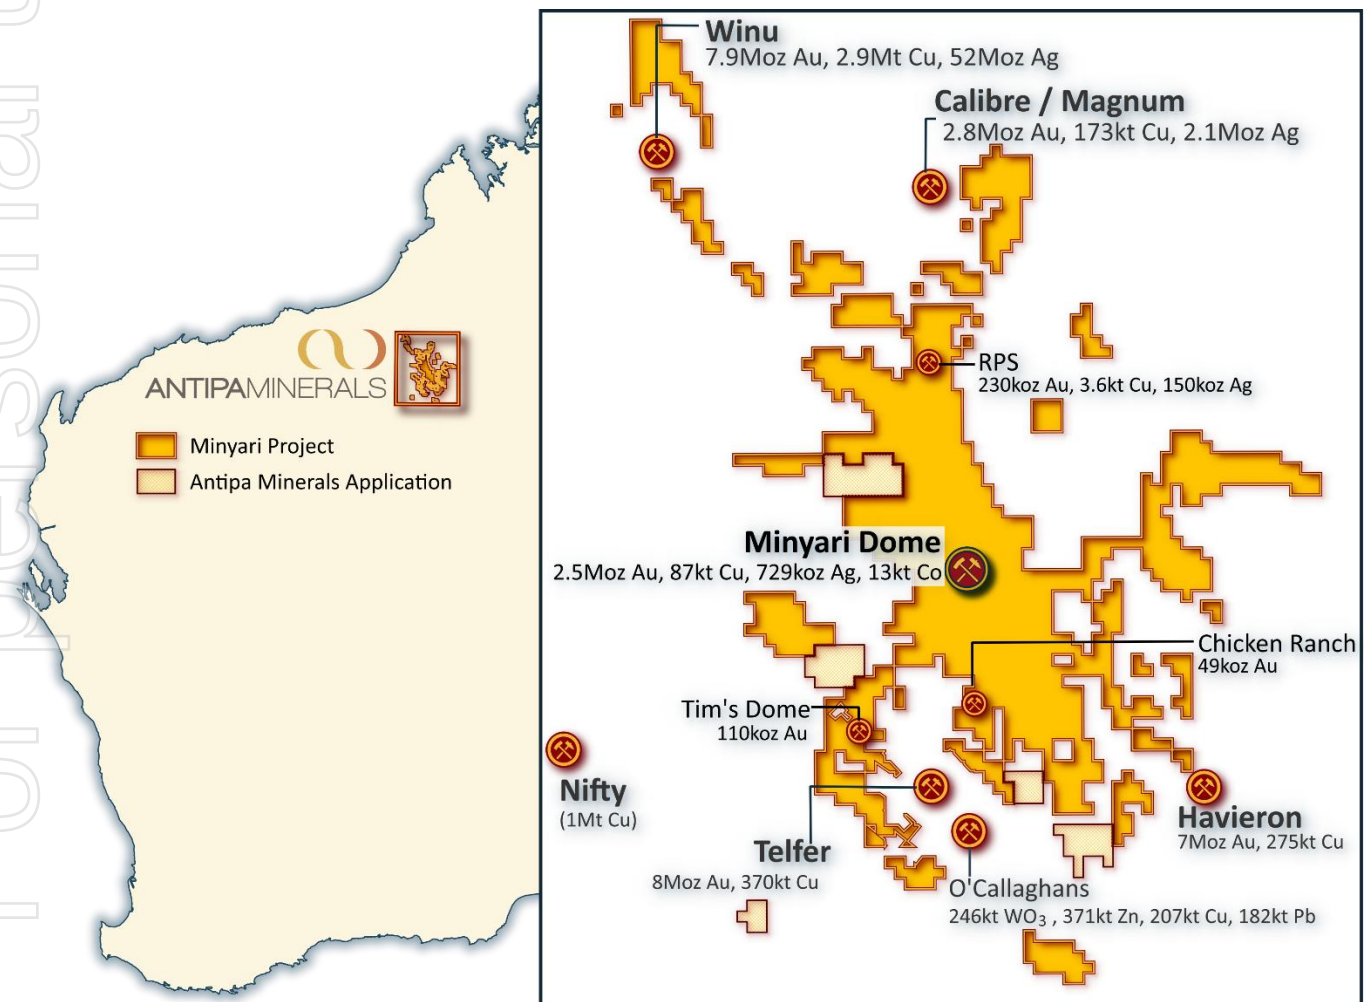

Forward-Looking Statements: This document may include forward-looking statements. Forward-looking statements include, but are not limited to, statements concerning Antipa Mineral Ltd's planned exploration programme, the Minyari Development PFS and associated workstreams, and other statements that are not historical facts. When used in this document, words such as "could," "plan," "estimate," "expect," "intend," "may," "potential," "should," and similar expressions are forward-looking statements. Although Antipa Minerals Ltd believes that its expectations reflected in these forward-looking statements are reasonable, such statements involve risks and uncertainties, and no assurance can be given that actual results will be consistent with these forward-looking statements.

Telfer, Havieron and O'Callaghans refer to Greatland Resources Ltd ASX release dated 30 March 2026, "December 2025 Group Mineral Resource Statement". Winu refer to Rio Tinto Ltd ASX release dated 19 February 2025, "Mineral Resources and Ore Reserves updates". Nifty refer to Cyprium Metals Ltd ASX release dated 14 March 2024, "Updated Nifty MRE Reaches 1M Tonnes Contained Copper". Calibre refer to Antipa release dated 26 August 2024, "Calibre Gold Resource Increases 19% to 2.5 Moz - Citadel JV". Magnum refer to Antipa release dated 23 February 2015, "Calibre and Magnum Deposit Mineral Resource JORC 2012 Updates".

Table 1a: Minyari Project - CY2026 Reverse Circulation Drill Results - Assay Batch 5

Hole ID	Deposit/ Prospect	From (m)	To (m)	Interval (m)	Gold (g/t)	Copper (ppm)	Silver (g/t)	Cobalt (ppm)	Lead (ppm)	Zinc (ppm)
25MYD0540	Minyari	0.0	6.0	6.0	0.18	102	2.79	8	22	12
25MYD0540	Minyari	15.0	19.0	4.0	0.01	1,399	0.21	41	10	66
25MYD0540	Minyari	19.0	19.9	0.9	0.82	4,840	0.84	186	14	104
25MYD0540	Minyari	19.9	24.0	4.1	0.05	582	0.10	234	4	52
25MYD0540	Minyari	24.0	26.0	2.0	1.43	8,153	1.29	91	4	53
	Including	25.0	26.0	1.0	2.76	15,450	2.42	68	4	58
25MYD0540	Minyari	26.0	32.0	6.0	0.05	469	0.21	60	6	36
25MYD0540	Minyari	32.0	40.0	8.0	1.48	2,193	0.34	213	7	38
	Including	33.0	34.0	1.0	10.55	11,900	1.24	947	13	84
25MYD0540	Minyari	40.0	41.0	1.0	0.09	643	0.18	123	9	38
25MYD0540	Minyari	60.0	61.0	1.0	0.01	460	0.09	47	4	42
25MYD0540	Minyari	66.0	88.0	22.0	0.15	610	0.17	398	8	36
	Including	70.0	72.0	2.0	0.46	725	0.29	460	6	37
	Including	75.0	76.0	1.0	0.78	226	0.08	2,180	23	58
25MYD0540	Minyari	88.0	100.0	12.0	0.02	494	0.06	149	3	22
25MYD0540	Minyari	100.0	122.0	22.0	8.21	339	0.12	3,549	10	25
	Including	107.9	113.0	5.1	27.40	268	0.23	10,408	18	9
	Including	116.4	117.2	0.8	12.75	203	0.11	2,710	4	9
	Including	120.0	121.0	1.0	15.80	206	0.11	5,990	3	5
25MYD0540	Minyari	122.0	123.0	1.0	0.04	536	0.06	258	2	16
26XMDC0994	Behemoth	4.0	20.0	16.0	0.11	300	0.04	306	4	92
26XMDC0995	Behemoth	12.0	20.0	8.0	0.02	702	0.19	59	4	84
26XMDC0996	Behemoth	83.0	84.0	1.0	0.06	3,070	1.10	104	3	68
26XMDC0997	Rizzo	6.0	11.0	5.0	0.01	380	0.05	37	8	64
26XMDC0997	Rizzo	25.0	26.0	1.0	0.52	221	0.06	34	5	81
26XMDC0997	Rizzo	33.0	40.0	7.0	0.03	444	0.07	43	5	76
26XMDC0997	Rizzo	40.0	42.0	2.0	0.25	755	0.06	37	3	66
26XMDC0997	Rizzo	42.0	43.0	1.0	0.03	398	0.04	24	8	108
26XMDC0997	Rizzo	65.0	67.0	2.0	2.96	858	0.28	96	21	40
	Including	65.0	66.0	1.0	5.84	991	0.48	95	20	34
26XMDC0997	Rizzo	67.0	68.0	1.0	0.03	491	0.09	41	4	58
26XMDC0997	Rizzo	80.0	81.0	1.0	0.03	502	0.02	43	3	45
26XMDC0997	Rizzo	84.0	85.0	1.0	0.10	175	0.11	28	12	165
26XMDC0997	Rizzo	94.0	100.0	6.0	0.08	455	0.23	31	45	72
26XMDC0997	Rizzo	102.0	106.0	4.0	0.02	487	0.11	25	20	87
26XMDC0997	Rizzo	106.0	109.0	3.0	0.38	243	0.14	35	24	75
	Including	107.0	108.0	1.0	0.71	137	0.12	36	22	78
26XMDC0998	Rizzo	30.0	34.0	4.0	0.23	53	0.02	11	2	8
	Including	32.0	34.0	2.0	0.38	71	0.03	10	2	8
26XMDC0998	Rizzo	80.0	83.0	3.0	0.73	803	0.09	47	7	39
	Including	80.0	81.0	1.0	1.62	1,555	0.16	69	6	29
26XMDC0998	Rizzo	99.0	101.0	2.0	0.15	635	0.43	104	87	277
26XMDC0998	Rizzo	106.0	107.0	1.0	0.04	427	0.07	17	9	18
26XMDC0998	Rizzo	107.0	108.0	1.0	0.10	269	0.05	36	18	51
26XMDC0998	Rizzo	116.0	117.0	1.0	0.02	987	0.12	46	7	50
26XMDC0999	Rizzo	12.0	22.0	10.0	0.02	693	0.08	24	15	46
26XMDC0999	Rizzo	22.0	36.0	14.0	0.12	1,828	0.29	48	3	62
	Including	31.0	33.0	2.0	0.33	2,955	0.29	60	2	57
26XMDC0999	Rizzo	36.0	44.0	8.0	0.05	1,680	0.15	36	6	71
26XMDC0999	Rizzo	56.0	61.0	5.0	0.11	531	0.10	43	4	70
26XMDC0999	Rizzo	61.0	69.0	8.0	0.03	542	0.05	44	4	64
26XMDC0999	Rizzo	69.0	70.0	1.0	0.12	452	0.07	48	8	39
26XMDC0999	Rizzo	75.0	90.0	15.0	0.12	304	0.10	48	11	76
	Including	79.0	80.0	1.0	0.42	615	0.19	61	16	108
	Including	88.0	89.0	1.0	0.38	191	0.06	40	3	26
26XMDC0999	Rizzo	109.0	110.0	1.0	0.16	20	0.03	10	5	18
26XMDC0999	Rizzo	120.0	121.0	1.0	0.13	309	0.04	29	3	21

Hole ID	Deposit/ Prospect	From (m)	To (m)	Interval (m)	Gold (g/t)	Copper (ppm)	Silver (g/t)	Cobalt (ppm)	Lead (ppm)	Zinc (ppm)
26XMDC0999	Rizzo	124.0	125.0	1.0	0.20	70	0.02	22	7	18
26XMDC0999	Rizzo	149.0	150.0	1.0	0.10	278	0.12	10	9	23
26XMDC1000	Rizzo	4.0	46.0	42.0	0.26	1,503	0.23	58	7	86
	Including	6.0	8.0	2.0	0.88	1,433	0.17	81	11	98
	Including	31.0	32.0	1.0	2.63	4,500	0.44	175	15	114
	Including	39.0	40.0	1.0	0.76	3,910	0.64	64	30	225
26XMDC1000	Rizzo	51.0	52.0	1.0	0.10	1,225	0.21	54	2	50
26XMDC1000	Rizzo	52.0	61.0	9.0	0.04	699	0.10	52	4	58
26XMDC1000	Rizzo	61.0	65.0	4.0	0.11	1,253	0.19	201	7	44
26XMDC1000	Rizzo	65.0	70.0	5.0	0.02	652	0.08	132	11	41
26XMDC1000	Rizzo	70.0	72.0	2.0	0.02	219	0.05	187	9	44
26XMDC1000	Rizzo	72.0	73.0	1.0	0.16	381	0.13	349	5	27
26XMDC1000	Rizzo	76.0	77.0	1.0	0.64	5,190	0.43	192	6	44
26XMDC1000	Rizzo	77.0	78.0	1.0	0.08	507	0.11	55	3	32
26XMDC1000	Rizzo	87.0	89.0	2.0	0.02	289	0.05	287	10	42
26XMDC1000	Rizzo	118.0	119.0	1.0	0.25	96	0.05	17	18	45
26XMDC1000	Rizzo	134.0	135.0	1.0	0.02	87	0.25	48	64	414
26XMDC1000	Rizzo	135.0	139.0	4.0	0.09	328	0.11	48	32	171
26XMDC1000	Rizzo	140.0	141.0	1.0	0.05	505	0.58	50	121	322
26XMDC1000	Rizzo	144.0	147.0	3.0	0.06	546	0.09	52	15	69
26XMDC1000	Rizzo	147.0	158.0	11.0	0.17	780	1.08	55	83	99
	Including	152.0	153.0	1.0	0.53	885	0.38	83	127	128
26XMDC1000	Rizzo	166.0	170.0	4.0	0.09	359	0.08	40	2	49
26XMDC1000	Rizzo	178.0	179.0	1.0	0.10	317	0.16	34	4	49
26XMDC1000	Rizzo	205.0	206.0	1.0	0.10	330	0.25	51	14	52
26XMDC1001	Rizzo	23.0	24.0	1.0	0.02	326	0.02	42	3	27
26XMDC1001	Rizzo	45.0	49.0	4.0	0.03	350	0.05	44	5	21
26XMDC1001	Rizzo	58.0	59.0	1.0	0.01	296	0.04	16	2	19
26XMDC1001	Rizzo	61.0	65.0	4.0	0.01	304	0.02	11	2	14
26XMDC1001	Rizzo	70.0	74.0	4.0	0.02	940	0.20	17	1	16
26XMDC1001	Rizzo	78.0	80.0	2.0	0.01	374	0.05	18	3	16
26XMDC1001	Rizzo	86.0	88.0	2.0	0.02	677	0.04	25	5	18
26XMDC1001	Rizzo	124.0	130.0	6.0	0.75	3,482	9.58	78	428	1,178
	Including	125.0	126.0	1.0	3.06	7,990	1.39	82	230	274
	Including	126.0	128.0	2.0	0.22	4,100	26.05	100	976	3,085
26XMDC1001	Rizzo	130.0	140.0	10.0	0.05	586	0.37	22	42	79
26XMDC1001	Rizzo	140.0	145.0	5.0	0.68	3,068	0.58	102	8	75
	Including	140.0	141.0	1.0	2.00	4,310	0.88	207	10	74
26XMDC1001	Rizzo	145.0	150.0	5.0	0.04	801	1.72	54	337	2,296
26XMDC1001	Rizzo	150.0	151.0	1.0	0.12	510	0.45	48	38	256
26XMDC1001	Rizzo	151.0	153.0	2.0	0.03	249	0.14	27	23	99
26XMDC1001	Rizzo	153.0	159.0	6.0	0.11	1,272	0.26	47	9	67
26XMDC1001	Rizzo	159.0	163.0	4.0	0.05	430	0.09	41	3	47
26XMDC1001	Rizzo	163.0	164.0	1.0	0.17	1,440	0.26	42	3	47
26XMDC1001	Rizzo	164.0	165.0	1.0	0.05	545	0.09	19	11	37
26XMDC1001	Rizzo	173.0	174.0	1.0	0.02	417	0.08	69	5	23
26XMDC1001	Rizzo	246.0	248.0	2.0	0.02	378	0.07	43	2	86
26XMDC1001	Rizzo	251.0	252.0	1.0	0.02	340	0.06	30	5	54
26XMDC1001	Rizzo	256.0	257.0	1.0	0.01	409	0.08	40	4	65
26XMDC1001	Rizzo	264.0	267.0	3.0	0.04	372	0.06	38	2	43
26XMDC1001	Rizzo	267.0	268.0	1.0	0.10	321	0.06	36	3	34
26XMDC1002	Rizzo	15.0	16.0	1.0	0.17	198	0.04	56	3	68
26XMDC1002	Rizzo	41.0	68.0	27.0	0.13	551	0.07	39	19	65
	Including	49.0	50.0	1.0	0.27	374	0.08	33	27	43
	Including	54.0	55.0	1.0	0.26	1,215	0.13	78	9	36
	Including	58.0	59.0	1.0	0.27	837	0.10	53	5	41
	Including	62.0	63.0	1.0	0.27	733	0.12	52	7	67
	Including	64.0	65.0	1.0	0.26	1,325	0.21	37	12	61
26XMDC1002	Rizzo	68.0	69.0	1.0	0.04	488	0.08	39	4	50

Hole ID	Deposit/ Prospect	From (m)	To (m)	Interval (m)	Gold (g/t)	Copper (ppm)	Silver (g/t)	Cobalt (ppm)	Lead (ppm)	Zinc (ppm)
26XMDC1002	Rizzo	149.0	150.0	1.0	0.25	483	0.07	41	3	44
26XMDC1002	Rizzo	156.0	159.0	3.0	0.07	217	0.04	33	3	32
26XMDC1003	Rizzo	2.0	5.0	3.0	0.06	613	0.09	51	8	46
26XMDC1003	Rizzo	5.0	14.0	9.0	0.27	639	0.09	53	3	52
	Including	12.0	13.0	1.0	0.58	769	0.10	60	4	56
26XMDC1003	Rizzo	22.0	33.0	11.0	0.04	298	0.07	35	18	58
26XMDC1003	Rizzo	33.0	35.0	2.0	0.11	338	0.09	39	8	61
26XMDC1003	Rizzo	37.0	42.0	5.0	0.09	26	0.02	21	3	8
26XMDC1003	Rizzo	56.0	57.0	1.0	0.12	449	0.19	40	26	133
26XMDC1003	Rizzo	63.0	64.0	1.0	0.15	414	0.07	28	6	40
26XMDC1003	Rizzo	70.0	73.0	3.0	0.02	571	0.11	91	10	90
26XMDC1003	Rizzo	79.0	93.0	14.0	0.02	734	0.06	73	6	54
26XMDC1003	Rizzo	117.0	124.0	7.0	0.02	525	0.07	45	4	17
26XMDC1003	Rizzo	128.0	134.0	6.0	0.24	817	0.16	69	10	31
	Including	130.0	131.0	1.0	0.75	1,895	0.36	149	18	45
26XMDC1003	Rizzo	152.0	155.0	3.0	0.01	11	0.02	85	6	22
26XMDC1003	Rizzo	159.0	160.0	1.0	0.01	19	0.01	55	3	123
26XMDC1003	Rizzo	178.0	179.0	1.0	0.01	430	0.06	17	4	39
26XMDC1003	Rizzo	193.0	194.0	1.0	0.12	1,325	0.12	61	3	91
26XMDC1003	Rizzo	194.0	198.0	4.0	0.04	541	0.06	45	3	86
26XMDC1003	Rizzo	202.0	203.0	1.0	0.09	427	0.01	47	3	64
26XMDC1003	Rizzo	208.0	209.0	1.0	0.39	197	0.12	35	3	49
26XMDC1003	Rizzo	214.0	216.0	2.0	0.10	270	0.02	38	2	38
26XMDC1003	Rizzo	225.0	226.0	1.0	0.02	469	0.07	37	147	69
26XMDC1003	Rizzo	236.0	237.0	1.0	0.06	425	0.06	46	2	65
26XMDC1003	Rizzo	257.0	258.0	1.0	0.01	158	0.17	25	225	1,415
26XMDC1003	Rizzo	260.0	261.0	1.0	0.03	458	0.08	31	13	24
26XMDC1003	Rizzo	261.0	262.0	1.0	0.12	1,185	0.19	34	8	29
26XMDC1003	Rizzo	262.0	264.0	2.0	0.05	460	0.11	71	82	97
26XMDC1003	Rizzo	264.0	265.0	1.0	0.15	364	0.23	113	1,025	1,630
26XMDC1003	Rizzo	265.0	267.0	2.0	0.03	243	0.06	128	141	250
26XMDC1005	Rizzo	29.0	30.0	1.0	0.10	88	0.02	12	4	28
26XMDC1005	Rizzo	42.0	50.0	8.0	0.01	392	0.06	15	6	23
26XMDC1005	Rizzo	166.0	167.0	1.0	0.01	40	0.04	39	14	38
26XMDC1005	Rizzo	172.0	173.0	1.0	0.01	475	0.12	14	33	125
26XMDC1005	Rizzo	178.0	180.0	2.0	0.10	2,980	0.43	27	12	77
26XMDC1005	Rizzo	180.0	190.0	10.0	0.01	2,612	0.34	25	14	67
	Including	180.0	181.0	1.0	0.01	13,000	1.61	78	14	178
26XMDC1005	Rizzo	203.0	205.0	2.0	0.01	63	0.04	68	21	77
26XMDC1005	Rizzo	210.0	211.0	1.0	0.01	497	0.15	31	5	76
26XMDC1005	Rizzo	239.0	240.0	1.0	0.05	519	0.06	65	3	32
26XMDC1005	Rizzo	248.0	249.0	1.0	0.10	217	0.04	39	4	54
26XMDC1005	Rizzo	249.0	251.0	2.0	0.05	462	0.09	45	9	44
26XMDC1005	Rizzo	262.0	263.0	1.0	0.10	181	0.05	38	3	51
26XMDC1005	Rizzo	273.0	287.0	14.0	0.56	529	0.11	50	2	65
	Including	276.0	277.0	1.0	5.35	1,570	0.26	96	6	75
26XMDC1005	Rizzo	292.0	293.0	1.0	0.04	1,055	0.12	86	9	29
26XMDC1005	Rizzo	298.0	300.0	2.0	0.71	1,356	0.25	163	3	51
	Including	298.0	299.0	1.0	1.19	2,560	0.46	298	3	71
26XMDC1005	Rizzo	302.0	303.0	1.0	0.06	575	0.06	68	5	35
26XMDC1005	Rizzo	303.0	305.0	2.0	0.10	634	0.07	62	2	75
26XMDC1005	Rizzo	305.0	313.0	8.0	0.03	621	0.10	43	5	53
26XMDC1005	Rizzo	321.0	323.0	2.0	0.15	94	0.05	13	3	38
26XMDC1006	Rizzo	36.0	39.0	3.0	0.04	592	0.09	71	8	46
26XMDC1006	Rizzo	44.0	50.0	6.0	0.18	997	0.11	88	5	43
	Including	48.0	50.0	2.0	0.36	838	0.18	61	6	61
26XMDC1006	Rizzo	54.0	55.0	1.0	0.01	404	0.05	74	54	83
26XMDC1006	Rizzo	63.0	65.0	2.0	0.06	1,885	0.32	361	10	40
26XMDC1006	Rizzo	65.0	66.0	1.0	0.17	713	0.09	179	7	32

Hole ID	Deposit/ Prospect	From (m)	To (m)	Interval (m)	Gold (g/t)	Copper (ppm)	Silver (g/t)	Cobalt (ppm)	Lead (ppm)	Zinc (ppm)
26XMDC1006	Rizzo	66.0	70.0	4.0	0.04	421	0.06	117	35	24
26XMDC1006	Rizzo	70.0	82.0	12.0	1.34	3,526	0.27	347	7	46
	Including	72.0	74.0	2.0	5.41	4,170	0.35	430	8	47
26XMDC1006	Rizzo	91.0	93.0	2.0	0.35	1,028	0.17	22	23	61
26XMDC1006	Rizzo	104.0	105.0	1.0	0.01	462	0.15	113	9	51
26XMDC1006	Rizzo	110.0	111.0	1.0	0.06	625	0.20	119	3	69
26XMDC1006	Rizzo	112.0	114.0	2.0	0.22	1,279	0.18	140	6	51
26XMDC1006	Rizzo	123.0	124.0	1.0	0.01	189	0.03	67	2	58
26XMDC1006	Rizzo	126.0	128.0	2.0	0.10	313	0.09	56	5	50
26XMDC1006	Rizzo	139.0	141.0	2.0	0.04	544	0.08	51	3	37
26XMDC1006	Rizzo	141.0	142.0	1.0	0.10	673	0.06	86	2	41
26XMDC1006	Rizzo	155.0	156.0	1.0	0.03	606	0.07	152	4	36
26XMDC1006	Rizzo	168.0	171.0	3.0	0.02	449	0.04	70	3	28
	Including	168.0	170.0	2.0	0.03	564	0.06	84	3	35
26XMDC1006	Rizzo	171.0	178.0	7.0	0.24	841	0.15	48	11	70
	Including	172.0	175.0	3.0	0.45	1,517	0.26	56	17	85
26XMDC1006	Rizzo	222.0	227.0	5.0	0.07	345	0.06	50	8	38
26XMDC1007	Rizzo	4.0	11.0	7.0	0.02	587	0.14	13	3	27
26XMDC1007	Rizzo	18.0	19.0	1.0	0.02	415	0.06	9	3	34
26XMDC1007	Rizzo	23.0	24.0	1.0	0.01	426	0.04	11	12	43
26XMDC1007	Rizzo	32.0	33.0	1.0	0.13	289	0.08	11	6	19
26XMDC1007	Rizzo	33.0	53.0	20.0	0.03	600	0.11	44	11	63
	Including	34.0	35.0	1.0	0.03	1,485	0.18	56	22	73
	Including	41.0	42.0	1.0	0.06	1,120	0.15	38	28	70
	Including	49.0	52.0	3.0	0.04	1,263	0.24	59	3	82
26XMDC1007	Rizzo	64.0	66.0	2.0	0.02	531	0.16	45	6	63
26XMDC1007	Rizzo	75.0	76.0	1.0	0.04	436	0.06	12	3	22
26XMDC1007	Rizzo	76.0	77.0	1.0	2.36	2,070	0.38	27	12	84
26XMDC1007	Rizzo	77.0	79.0	2.0	0.07	1,195	0.27	20	9	63
26XMDC1007	Rizzo	91.0	92.0	1.0	0.01	421	0.15	49	4	66
26XMDC1007	Rizzo	118.0	119.0	1.0	0.01	148	0.03	32	3	12
26XMDC1007	Rizzo	140.0	141.0	1.0	0.02	421	0.07	55	2	64
26XMDC1007	Rizzo	141.0	146.0	5.0	0.02	206	0.05	63	2	63
26XMDC1007	Rizzo	182.0	183.0	1.0	0.03	478	0.08	37	5	52
26XMDC1007	Rizzo	188.0	190.0	2.0	0.04	683	0.10	41	5	51
26XMDC1007	Rizzo	190.0	202.0	12.0	0.18	809	0.14	43	4	50
26XMDC1007	Rizzo	238.0	239.0	1.0	0.01	197	0.08	30	61	610
26XMDC1007	Rizzo	304.0	313.0	9.0	0.47	388	0.19	37	15	66
	Including	306.0	307.0	1.0	2.86	677	1.06	53	90	222
26XMDC1008	Rizzo	5.0	9.0	4.0	0.02	432	0.17	96	48	73
26XMDC1008	Rizzo	12.0	13.0	1.0	0.19	206	0.09	113	11	92
26XMDC1008	Rizzo	219.0	221.0	2.0	0.09	405	0.05	41	2	48
26XMDD0555	Geo-01 Main Zone	413.0	414.0	1.0	0.13	3	0.02	9	7	8
26XMDD0555	Geo-01 Main Zone	421.0	423.0	2.0	1.49	73	0.11	13	8	47
	Including	422.0	423.0	1.0	2.40	35	0.17	8	3	12
26XMDD0555	Geo-01 Main Zone	432.0	433.0	1.0	0.04	76	0.03	557	2	14
26XMDD0555	Geo-01 Main Zone	459.9	460.5	0.7	0.15	5	0.01	1	28	6
26XMDD0555	Geo-01 Main Zone	476.0	477.0	1.0	0.01	431	0.03	46	2	16
26XMDD0555	Geo-01 Main Zone	494.0	495.0	1.0	0.45	386	0.08	31	3	23
26XMDD0555	Geo-01 Main Zone	499.0	502.0	3.0	0.01	557	0.05	33	2	19
	Including	501.0	502.0	1.0	0.02	1,115	0.07	41	2	20
26XMDD0555	Geo-01 Main Zone	504.8	505.9	1.2	0.13	405	0.09	6	3	5
26XMDD0555	Geo-01 Main Zone	505.9	507.4	1.5	0.01	384	0.05	23	2	28
26XMDD0555	Geo-01 Main Zone	517.0	519.0	2.0	0.15	2,608	0.48	17	4	47
26XMDD0555	Geo-01 Main Zone	523.0	524.0	1.0	0.08	448	0.13	5	3	8
26XMDD0555	Geo-01 Main Zone	526.0	528.0	2.0	0.27	997	0.22	43	3	17
	Including	526.0	527.0	1.0	0.42	884	0.19	76	2	12
26XMDD0555	Geo-01 Main Zone	536.0	538.0	2.0	0.04	529	0.13	7	3	18
26XMDD0555	Geo-01 Main Zone	538.0	539.0	1.0	0.13	2,821	0.70	12	18	36

Hole ID	Deposit/ Prospect	From (m)	To (m)	Interval (m)	Gold (g/t)	Copper (ppm)	Silver (g/t)	Cobalt (ppm)	Lead (ppm)	Zinc (ppm)
26XMDD0555	Geo-01 Main Zone	583.0	584.0	1.0	0.11	219	0.04	6	2	7
26XMDD0555	Geo-01 Main Zone	593.0	595.0	2.0	0.20	218	0.05	3	4	9
26XMDD0555	Geo-01 Main Zone	606.0	607.0	1.0	0.10	42	0.05	3	12	12
26XMDD0555	Geo-01 Main Zone	612.0	615.0	3.0	0.39	519	0.15	8	6	19
	Including	612.0	613.0	1.0	0.63	328	0.07	8	4	31
	Including	614.3	615.0	0.7	0.61	1,435	0.47	11	6	20
26XMDD0555	Geo-01 Main Zone	615.0	616.0	1.0	0.08	469	0.13	6	3	15
26XMDD0555	Geo-01 Main Zone	621.0	626.0	5.0	0.40	401	0.11	17	4	19
26XMDD0555	Geo-01 Main Zone	630.0	633.0	3.0	0.19	190	0.03	8	4	15
26XMDD0555	Geo-01 Main Zone	640.4	667.0	26.6	1.36	448	0.20	12	18	61
	Including	644.1	663.0	18.9	1.80	583	0.27	14	22	78
	also including	650.8	660.4	9.6	2.92	764	0.44	18	36	133
	also including	658.0	660.4	2.4	7.44	1,356	1.43	27	127	411
26XMDD0555	Geo-01 Main Zone	675.1	676.0	0.9	0.06	430	0.14	33	4	34
26XMDD0555	Geo-01 Main Zone	693.0	694.0	1.0	0.16	1,190	0.07	45	2	28
26XMDD0555	Geo-01 Main Zone	712.0	713.0	1.0	0.04	519	0.06	32	9	33
26XMDD0555	Geo-01 Main Zone	715.5	716.0	0.6	0.01	629	0.05	36	4	20
26XMDD0555	Geo-01 Main Zone	728.5	729.0	0.5	0.11	16	0.01	5	5	14
26XMDD0555	Geo-01 Main Zone	737.0	738.0	1.0	0.02	484	0.04	12	3	20
26XMDD0555	Geo-01 Main Zone	740.0	741.0	1.0	0.15	441	0.03	29	4	31
26XMDD0555	Geo-01 Main Zone	741.0	745.0	4.0	0.03	464	0.04	24	2	27
26XMDD0555	Geo-01 Main Zone	756.9	758.0	1.1	0.24	30	0.08	3	23	16
26XMDD0555	Geo-01 Main Zone	762.0	764.0	2.0	0.05	434	0.17	29	14	35
26XMDD0555	Geo-01 Main Zone	770.0	771.3	1.3	0.08	499	0.08	21	23	18
26XMDD0555	Geo-01 Main Zone	785.1	792.0	6.9	0.11	200	0.10	12	46	95
26XMDD0555	Geo-01 Main Zone	795.0	796.0	1.0	0.01	492	0.10	32	3	37
26XMDD0555	Geo-01 Main Zone	818.0	819.0	1.0	0.01	465	0.12	43	2	24
26XMDD0556	WACA	9.0	10.0	1.0	0.10	243	0.01	24	2	43
26XMDD0556	WACA	17.0	18.0	1.0	0.01	187	0.83	40	2	105
26XMDD0556	WACA	31.0	33.0	2.0	0.03	479	0.04	33	2	30
26XMDD0556	WACA	53.0	55.0	2.0	0.01	58	0.13	24	151	511
26XMDD0556	WACA	65.8	67.0	1.2	0.01	44	0.13	14	349	479
26XMDD0556	WACA	83.0	84.0	1.0	0.01	19	0.02	474	5	34
26XMDD0556	WACA	133.0	134.0	1.0	0.01	862	0.19	18	4	69
26XMDD0556	WACA	176.0	177.0	1.0	0.01	251	1.06	60	1,710	791
26XMDD0556	WACA	209.0	210.0	1.0	0.01	48	0.11	11	411	1,600
26XMDD0556	WACA	284.2	284.7	0.5	0.01	675	0.07	328	3	20
26XMDD0556	WACA	313.0	314.0	1.0	0.11	14	0.01	111	2	12
26XMDD0556	WACA	322.0	325.0	3.0	0.17	121	0.03	144	2	7
26XMDD0556	WACA	329.0	331.0	2.0	0.34	397	0.06	351	2	10
	Including	329.0	330.0	1.0	0.53	198	0.01	617	2	8
26XMDD0556	WACA	336.0	337.0	1.0	0.04	310	0.04	72	2	12
26XMDD0556	WACA	338.0	339.0	1.0	0.13	117	0.01	15	2	9
26XMDD0556	WACA	354.0	354.7	0.7	0.67	46	0.01	52	1	14
26XMDD0556	WACA	357.7	361.0	3.3	0.36	42	0.03	28	1	6
	Including	360.0	361.0	1.0	1.00	33	0.03	8	1	5
26XMDD0556	WACA	367.0	369.0	2.0	0.42	161	0.04	22	2	10
	Including	368.0	369.0	1.0	0.68	124	0.05	27	2	11
26XMDD0556	WACA	379.0	380.0	1.0	0.02	463	0.07	60	3	11
26XMDD0556	WACA	381.0	382.0	1.0	0.18	1,990	0.29	46	2	10
26XMDD0556	WACA	386.0	430.0	44.0	0.49	171	0.06	621	8	101
	Including	386.0	407.0	21.0	0.82	152	0.07	867	8	190
	also including	387.0	388.0	1.0	2.14	72	0.03	1,750	9	77
	also including	399.0	402.0	3.0	2.73	158	0.12	1,520	9	276
	also including	406.0	407.0	1.0	0.99	35	0.03	514	8	15
26XMDD0556	WACA	437.0	438.0	1.0	0.19	335	0.05	38	3	17
26XMDD0556	WACA	439.0	440.0	1.0	0.01	421	0.07	20	3	17
26XMDD0556	WACA	445.0	446.0	1.0	0.01	598	0.07	19	10	25
26XMDD0556	WACA	486.0	487.0	1.0	0.01	794	0.10	43	3	26

Hole ID	Deposit/ Prospect	From (m)	To (m)	Interval (m)	Gold (g/t)	Copper (ppm)	Silver (g/t)	Cobalt (ppm)	Lead (ppm)	Zinc (ppm)
26XTDC0080	Tims Dome	0.0	2.0	2.0	0.01	25	0.05	5	23	454
26XTDC0080	Tims Dome	54.0	72.0	18.0	0.01	278	0.03	13	31	63
26XTDC0080	Tims Dome	77.0	78.0	1.0	0.04	515	0.09	22	34	90
26XTDC0080	Tims Dome	192.0	197.0	5.0	0.01	332	0.06	7	105	60
26XTDC0080	Tims Dome	199.0	200.0	1.0	0.77	170	0.08	7	163	176
26XTDC0080	Tims Dome	201.0	234.0	33.0	0.01	367	0.04	7	161	85
26XTDC0080	Tims Dome	241.0	292.0	51.0	0.03	2,404	0.36	187	319	179
	Including	252.0	253.0	1.0	0.22	157	0.06	3	21	15
	Including	267.0	292.0	25.0	0.03	4,346	0.56	374	609	347
	also including	273.0	275.0	2.0	0.06	10,975	4.17	22	145	60
	also including	278.0	280.0	2.0	0.04	9,310	0.27	931	4,135	1,063
	also including	285.0	286.0	1.0	0.13	4,640	0.14	656	1,420	1,280
	also including	286.0	287.0	1.0	0.05	10,850	0.24	1,355	1,960	1,935
	also including	289.0	291.0	2.0	0.08	16,975	0.47	2,168	552	947
26XTDC0081	Tims Dome	94.0	95.0	1.0	0.01	473	0.19	10	115	47
26XTDC0081	Tims Dome	99.0	100.0	1.0	0.01	432	0.49	8	43	25
26XTDC0081	Tims Dome	102.0	110.0	8.0	0.03	422	0.52	13	77	33
26XTDC0081	Tims Dome	110.0	112.0	2.0	0.21	394	0.39	13	67	26
26XTDC0081	Tims Dome	112.0	140.0	28.0	0.02	446	0.26	18	126	31
	Including	120.0	122.0	2.0	0.05	1,180	0.67	32	106	32
26XTDC0081	Tims Dome	140.0	146.0	6.0	0.31	565	0.68	11	88	17
	Including	141.0	142.0	1.0	0.77	1,015	1.54	12	164	24
26XTDC0081	Tims Dome	146.0	155.0	9.0	0.09	291	0.24	19	64	24
	Including	151.0	153.0	2.0	0.17	302	0.23	15	65	20
26XTDC0081	Tims Dome	163.0	178.0	15.0	0.02	490	0.16	20	981	171
	Including	164.0	172.0	8.0	0.01	467	0.15	15	1,393	166
	Including	177.0	178.0	1.0	0.08	313	0.22	20	1,200	127
26XTDC0081	Tims Dome	178.0	187.0	9.0	1.48	1,136	0.66	13	5,263	198
	Including	184.0	186.0	2.0	3.18	2,555	0.74	14	12,900	281
26XTDC0081	Tims Dome	187.0	204.0	17.0	0.02	614	0.58	48	975	265
	Including	187.0	192.0	5.0	0.04	471	0.75	65	1,699	88
	Including	197.0	198.0	1.0	0.01	1,010	0.57	44	717	548
	Including	201.0	204.0	3.0	0.01	890	0.64	37	1,081	423
26XTDC0082	Tims Dome	91.0	94.0	3.0	0.79	176	0.17	12	73	40
	Including	93.0	94.0	1.0	1.76	155	0.25	7	68	23
26XTDC0082	Tims Dome	101.0	102.0	1.0	0.03	932	0.34	87	232	189
26XTDC0082	Tims Dome	119.0	120.0	1.0	0.21	189	0.21	8	78	23
26XTDC0082	Tims Dome	120.0	123.0	3.0	0.03	432	0.26	9	35	24
26XTDC0082	Tims Dome	125.0	126.0	1.0	0.10	298	0.28	12	94	27
26XTDC0082	Tims Dome	133.0	135.0	2.0	0.01	649	0.20	11	33	70
26XTDC0082	Tims Dome	147.0	151.0	4.0	1.04	202	0.19	8	22	24
	Including	147.0	148.0	1.0	3.25	91	0.29	6	25	15
26XTDC0082	Tims Dome	151.0	160.0	9.0	0.04	781	0.14	15	47	28
	Including	151.0	155.0	4.0	0.05	1,139	0.15	18	64	35
26XTDC0083	Tims Dome	42.0	43.0	1.0	0.09	277	0.07	35	55	84
26XTDC0083	Tims Dome	79.0	81.0	2.0	0.11	138	0.06	25	49	72
26XTDC0083	Tims Dome	83.0	84.0	1.0	0.10	57	0.04	11	40	63
26XTDC0083	Tims Dome	92.0	95.0	3.0	0.22	146	0.05	19	22	64
	Including	92.0	93.0	1.0	0.33	145	0.05	22	22	63
26XTDC0083	Tims Dome	99.0	101.0	2.0	0.02	612	0.42	37	116	170
26XTDC0083	Tims Dome	113.0	114.0	1.0	0.68	97	0.20	4	23	27
26XTDC0083	Tims Dome	126.0	129.0	3.0	0.12	150	0.10	4	35	118
26XTDC0083	Tims Dome	137.0	141.0	4.0	0.10	131	0.15	5	30	26
26XTDC0083	Tims Dome	149.0	154.0	5.0	0.18	231	0.16	11	30	21
	Including	149.0	150.0	1.0	0.47	548	0.20	32	46	24
26XTDC0083	Tims Dome	154.0	186.0	32.0	0.02	373	0.15	21	44	33
26XTDC0083	Tims Dome	186.0	192.0	6.0	2.08	1,225	0.35	24	105	27
	Including	187.0	189.0	2.0	3.34	1,458	0.45	13	100	30
26XTDC0083	Tims Dome	192.0	198.0	6.0	0.02	463	0.21	30	62	24

Hole ID	Deposit/ Prospect	From (m)	To (m)	Interval (m)	Gold (g/t)	Copper (ppm)	Silver (g/t)	Cobalt (ppm)	Lead (ppm)	Zinc (ppm)
26XTDC0083	Tims Dome	198.0	200.0	2.0	0.23	1,275	0.26	91	1,070	414
	Including	198.0	199.0	1.0	0.42	1,510	0.32	76	934	281
26XTDC0083	Tims Dome	199.0	209.0	10.0	0.02	1,334	0.45	43	245	94
26XTDC0083	Tims Dome	209.0	216.0	7.0	0.18	804	0.38	52	176	73
26XTDC0083	Tims Dome	220.0	227.0	7.0	0.01	390	0.17	29	65	22
26XTDC0083	Tims Dome	246.0	247.0	1.0	0.01	63	0.04	29	59	33
26XTDC0083	Tims Dome	249.0	250.0	1.0	0.01	42	0.02	52	42	22
26XTDC0083	Tims Dome	255.0	256.0	1.0	0.01	33	0.02	107	9	7
26XTDC0084	Tims Dome	75.0	79.0	4.0	0.23	346	0.03	13	33	32
26XTDC0084	Tims Dome	82.0	83.0	1.0	0.18	510	0.03	55	211	78
26XTDC0084	Tims Dome	83.0	84.0	1.0	0.03	424	0.03	32	104	69
26XTDC0084	Tims Dome	92.0	93.0	1.0	0.06	517	0.06	13	179	121
26XTDC0084	Tims Dome	95.0	97.0	2.0	0.32	134	0.07	5	45	51
26XTDC0084	Tims Dome	146.0	147.0	1.0	0.11	166	0.15	5	24	19
26XTDC0084	Tims Dome	172.0	180.0	8.0	0.19	261	0.16	12	39	30
	Including	179.0	180.0	1.0	0.57	307	0.15	13	54	32
26XTDC0084	Tims Dome	184.0	186.0	2.0	0.17	312	0.15	18	38	24
26XTDC0084	Tims Dome	186.0	192.0	6.0	0.03	446	0.14	21	53	37
26XTDC0084	Tims Dome	192.0	200.0	8.0	1.71	432	0.51	15	57	46
	Including	192.0	193.0	1.0	10.05	1,625	2.10	32	165	87
26XTDC0084	Tims Dome	221.0	222.0	1.0	0.03	168	0.06	57	43	24
26XTDC0084	Tims Dome	243.0	244.0	1.0	0.01	77	0.55	3	318	10
26XTDC0084	Tims Dome	244.0	245.0	1.0	0.01	117	0.70	3	39	10
26XTDC0084	Tims Dome	245.0	246.0	1.0	0.01	132	0.59	3	380	14
26XTDC0084	Tims Dome	250.0	252.0	2.0	0.02	508	0.27	11	46	41
26XTDC0084	Tims Dome	269.0	275.0	6.0	0.01	93	0.73	3	552	8
	Including	269.0	272.0	3.0	0.01	102	0.86	3	812	8
	Including	274.0	275.0	1.0	0.01	77	0.78	3	413	9
26XTDC0084	Tims Dome	291.0	292.0	1.0	0.04	406	0.47	12	36	41
26XTDC0085	Tims Dome	117.0	120.0	3.0	0.09	119	0.06	3	3	23
26XTDC0085	Tims Dome	169.0	171.0	2.0	0.10	574	0.08	62	34	193
26XTDC0085	Tims Dome	195.0	198.0	3.0	0.13	262	0.11	22	53	57
26XTDC0085	Tims Dome	223.0	224.0	1.0	0.06	582	0.14	30	76	69
26XTDC0085	Tims Dome	224.0	226.0	2.0	0.28	599	0.16	30	101	78
26XTDC0085	Tims Dome	226.0	227.0	1.0	0.06	406	0.10	22	78	47
26XTDC0085	Tims Dome	230.0	236.0	6.0	0.16	497	0.22	28	77	91
26XTDCBH01	Tims Dome	11.0	12.0	1.0	0.02	68	0.03	18	45	27
26XTDCBH01	Tims Dome	15.0	17.0	2.0	0.12	96	0.03	14	23	26
26XTDCBH01	Tims Dome	55.0	56.0	1.0	0.11	88	0.06	22	46	41
26XTDCBH01	Tims Dome	109.0	110.0	1.0	0.37	227	0.02	18	37	78

Table 1b: Minyari Project - CY2026 Air Core Drill Results – Assay Batch 5

Hole ID	Deposit/ Prospect	From (m)	To (m)	Interval (m)	Gold (g/t)	Copper (ppm)	Silver (g/t)	Cobalt (ppm)	Lead (ppm)
26XCRA0196	Chicken Ranch	44.0	48.0	4.0	0.07	53	0.09	3	45
26XCRA0197	Chicken Ranch	24.0	28.0	4.0	0.30	71	0.04	5	61
26XCRA0197	Chicken Ranch	48.0	59.0	11.0	0.37	172	0.02	32	193
26XCRA0198	Chicken Ranch	56.0	59.0	3.0	0.07	66	0.03	2	65
26XCRA0199	Chicken Ranch	28.0	36.0	8.0	0.06	39	0.05	1	17
26XCRA0199	Chicken Ranch	48.0	52.0	4.0	0.15	42	0.05	2	20
26XCRA0200	Chicken Ranch	40.0	44.0	4.0	0.06	50	0.09	3	66
26XCRA0200	Chicken Ranch	52.0	56.0	4.0	0.26	77	0.07	3	16
26XCRA0201	Chicken Ranch	18.0	19.0	1.0	0.00	235	0.30	4	269
26XCRA0201	Chicken Ranch	19.0	20.0	1.0	0.00	67	0.05	46	82
26XCRA0201	Chicken Ranch	28.0	32.0	4.0	0.05	33	0.09	55	77
26XCRA0201	Chicken Ranch	28.0	32.0	4.0	0.05	33	0.09	55	77
26XCRA0201	Chicken Ranch	44.0	45.0	1.0	0.13	40	0.14	1	27

Hole ID	Deposit/ Prospect	From (m)	To (m)	Interval (m)	Gold (g/t)	Copper (ppm)	Silver (g/t)	Cobalt (ppm)	Lead (ppm)
26XCRA0201	Chicken Ranch	48.0	52.0	4.0	0.10	51	0.18	2	15
26XCRA0202	Chicken Ranch	40.0	48.0	8.0	0.51	41	0.12	4	22
	Including	40.0	44.0	4.0	0.98	38	0.11	5	17
26XCRA0203	Chicken Ranch	21.0	23.0	2.0	0.03	474	0.26	26	31
26XCRA0203	Chicken Ranch	48.0	67.0	19.0	0.33	94	0.14	11	18
	Including	52.0	61.0	9.0	0.61	113	0.20	11	20
26XCRA0208	Chicken Ranch	52.0	56.0	4.0	0.08	59	0.06	5	4
26XCRA0209	Chicken Ranch	32.0	40.0	8.0	0.24	81	0.07	5	57
26XCRA0210	Chicken Ranch	24.0	28.0	4.0	0.09	27	0.03	1	17
26XCRA0210	Chicken Ranch	59.0	60.0	1.0	0.14	16	0.01	2	18
26XCRA0214	Chicken Ranch	44.0	48.0	4.0	0.08	98	0.15	8	120
26XCRA0215	Chicken Ranch	4.0	8.0	4.0	0.05	119	0.02	38	110
26XCRA0215	Chicken Ranch	31.0	32.0	1.0	0.06	42	0.03	8	21
26XCRA0216	Chicken Ranch	36.0	40.0	4.0	0.11	51	0.03	3	29
26XCRA0217	Chicken Ranch	0.0	40.0	40.0	0.18	51	0.05	11	29
	Including	0.0	8.0	8.0	0.65	51	0.04	33	34
26XCRA0218	Chicken Ranch	18.0	32.0	14.0	0.79	90	0.14	410	69
	Including	22.0	25.0	3.0	2.83	97	0.37	104	105
26XCRA0219	Chicken Ranch	46.0	50.0	4.0	0.53	50	0.10	38	67
	Including	46.0	47.0	1.0	1.52	66	0.20	42	63
26XCRA0219	Chicken Ranch	49.0	50.0	1.0	0.05	34	0.05	80	40
26XCRA0221	Chicken Ranch	4.0	8.0	4.0	0.05	109	0.15	11	110
26XCRA0223	Chicken Ranch	56.0	60.0	4.0	0.07	104	0.13	8	21
	Including	59.0	60.0	1.0	0.14	69	0.14	5	16
26XCRA0227	Chicken Ranch	10.0	12.0	2.0	2.79	51	0.24	65	161
	Including	11.0	12.0	1.0	5.18	65	0.43	108	120
26XCRA0228	Chicken Ranch	16.0	20.0	4.0	0.28	107	0.04	10	67
26XCRA0228	Chicken Ranch	40.0	54.0	14.0	2.10	69	0.19	45	47
	Including	48.0	50.0	2.0	12.97	260	0.97	240	42
	Also including	49.0	50.0	1.0	18.70	357	1.61	443	48
26XCRA0230	Chicken Ranch	52.0	58.0	6.0	0.08	22	0.14	4	23
	Including	56.0	57.0	1.0	0.28	25	0.14	5	26
26XCRA0231	Chicken Ranch	16.0	20.0	4.0	0.28	29	0.24	35	19
26XCRA0231	Chicken Ranch	60.0	64.0	4.0	0.10	25	0.01	11	5
26XCRA0232	Chicken Ranch	56.0	57.0	1.0	0.06	161	0.05	16	15
26XCRA0233	Chicken Ranch	28.0	32.0	4.0	0.20	71	0.05	10	21
26XCRA0234	Chicken Ranch	0.0	4.0	4.0	0.07	37	0.04	16	22
26XCRA0234	Chicken Ranch	12.0	20.0	8.0	0.01	415	0.04	41	49
26XCRA0235	Chicken Ranch	42.0	43.0	1.0	0.33	132	0.02	57	56
26XCRA0235	Chicken Ranch	44.0	45.0	1.0	0.05	62	0.04	16	239
26XCRA0235	Chicken Ranch	48.0	52.0	4.0	0.06	98	0.04	13	121
26XCRA0239	Chicken Ranch	56.0	59.0	3.0	0.12	58	0.05	2	39
26XCRA0241	Chicken Ranch	40.0	44.0	4.0	0.07	8	0.02	3	26
26XCRA0242	Chicken Ranch	28.0	72.0	44.0	0.07	8	0.01	1	23
	Including	28.0	32.0	4.0	0.14	4	0.03	1	24
	Including	60.0	64.0	4.0	0.12	16	0.01	1	37
26XCRA0243	Chicken Ranch	32.0	36.0	4.0	0.01	9	0.12	36	28
26XCRA0244	Chicken Ranch	20.0	24.0	4.0	0.06	45	0.05	9	7
26XCRA0244	Chicken Ranch	37.0	44.0	7.0	0.15	35	0.04	36	11
	Including	39.0	40.0	1.0	0.32	37	0.04	116	9
26XCRA0247	Chicken Ranch	4.0	8.0	4.0	0.00	30	0.05	156	18
26XCRA0248	Chicken Ranch	48.0	59.0	11.0	0.17	165	0.14	15	77
	Including	48.0	52.0	4.0	0.33	69	0.05	6	41
26XCRA0249	Chicken Ranch	23.0	24.0	1.0	0.01	80	1.78	14	17
26XCRA0250	Chicken Ranch	40.0	44.0	4.0	0.00	39	0.64	2	19
26XCRA0250	Chicken Ranch	48.0	52.0	4.0	0.07	26	0.24	7	11
26XCRA0250	Chicken Ranch	56.0	57.0	1.0	0.00	34	0.16	111	23
26XCRA0250	Chicken Ranch	56.0	57.0	1.0	0.00	34	0.16	111	23
26XCRA0251	Chicken Ranch	4.0	8.0	4.0	0.02	106	1.06	16	21

Hole ID	Deposit/ Prospect	From (m)	To (m)	Interval (m)	Gold (g/t)	Copper (ppm)	Silver (g/t)	Cobalt (ppm)	Lead (ppm)
26XCRA0252	Chicken Ranch	44.0	48.0	4.0	0.13	48	0.04	2	22
26XCRA0254	Chicken Ranch	16.0	20.0	4.0	0.05	95	0.06	14	33
26XCRA0255	Chicken Ranch	32.0	36.0	4.0	0.09	59	0.08	9	25
26XCRA0255	Chicken Ranch	56.0	59.0	3.0	0.12	72	0.06	3	44
26XCRA0256	Chicken Ranch	32.0	36.0	4.0	0.07	70	0.21	4	44
26XCRA0257	Chicken Ranch	16.0	20.0	4.0	0.22	70	0.05	6	51
26XCRA0263	Chicken Ranch	4.0	12.0	8.0	0.06	90	0.02	53	7
26XCRA0263	Chicken Ranch	20.0	28.0	8.0	0.06	119	0.06	36	9
26XCRA0265	Chicken Ranch	8.0	12.0	4.0	0.07	87	0.07	8	116
26XCRA0265	Chicken Ranch	16.0	18.0	2.0	0.07	91	0.25	3	50
26XCRA0265	Chicken Ranch	36.0	40.0	4.0	0.06	70	0.06	3	80
26XCRA0266	Chicken Ranch	50.0	51.0	1.0	0.01	98	0.25	8	287
26XCRA0267	Chicken Ranch	41.0	43.0	2.0	0.05	109	0.14	14	55
26XCRA0267	Chicken Ranch	48.0	49.0	1.0	0.23	221	0.32	7	39
26XCRA0270	Chicken Ranch	4.0	8.0	4.0	0.08	73	0.20	27	10
26XCRA0270	Chicken Ranch	32.0	36.0	4.0	0.05	120	0.07	60	10
26XCRA0270	Chicken Ranch	44.0	49.0	5.0	0.06	92	0.07	16	15
26XCRA0271	Chicken Ranch	20.0	24.0	4.0	0.10	109	0.03	58	10
26XCRA0271	Chicken Ranch	36.0	40.0	4.0	0.12	61	0.08	22	7

Table 1 Drill Results Notes:

Refer to JORC Table 1 Section 1 for full drill hole information; including drill technique, sampling, analytical technique/s, etc

Table intersections are length-weighted assay intervals reported using the following criteria:

Intersection Interval = Nominal cut-off grade scenarios:

- Gold ≥ 0.10 ppm (g/t) for PFS Resource Growth or Definition drilling or ≥ 50 ppb (0.05 ppm) for Discovery drilling; and/or
- Copper ≥ 400 ppm (0.04%) for PFS Resource Growth or Definition drilling or ≥ 300 ppm (0.03%) for Discovery drilling; and/or
- Silver ≥ 0.70 ppm (g/t); and/or
- Cobalt ≥ 400 ppm (0.04%) for PFS Resource Growth or Definition drilling or ≥ 300 ppm (0.03%) for Discovery drilling; and/or
- Lead ≥ 300 ppm (0.03%); and/or
- Zinc ≥ 300 ppm (0.03%); and/or
- Tungsten ≥ 300 ppm (0.03%).
- No top-cutting has been applied to these individual assay intervals.
- Intersections are down hole lengths, true widths not known with certainty, refer to JORC Table 1 Section 2.
- To convert ppm to percent (%) divide ppm by 10,000.
- To convert ppb to ppm (g/t) divide ppb by 1,000.
- Refer to JORC Table 1 Section 1 for full drill hole information; including drill technique, sampling, analytical technique/s, etc.

Hole ID Annotation:

Hole ID# = Drillhole/s with 1m re-sampling from 4m composites

Table 2a: Minyari Project – Exploration Programme
Reverse Circulation and Diamond Core Drill Hole Collar Locations (MGA Zone 51/GDA2020)

Hole ID	Programme	Target/Deposit	Hole Type	Northing (m)	Easting (m)	RL (m)	Hole Depth (m)	Azimuth (°)	Dip (°)	Assay Status
26XMDC0958	Growth	Fiama	RC	7,633,712	424,200	278	186.0	180.0	-60.0	Received
26XMDC0959	Growth	GEO-01-Central	RC	7,633,762	424,200	278	348.0	180.0	-60.0	Received
26XMDC0960	Growth	GEO-01-Central	RC	7,633,727	424,150	278	360.0	180.0	-60.0	Received
26XMDC0961	Growth	Fiama	RC	7,633,694	424,250	278	180.0	180.0	-60.0	Received
26XMDC0962	Growth	Fiama	RC	7,633,614	424,300	278	300.0	180.0	-60.0	Received
26XMDC0963	Growth	GEO-01-Central	RC	7,633,752	424,100	278	210.0	180.0	-60.0	Received
26XMDC0964	Growth	GEO-01-Central	RC	7,633,805	424,105	278	240.0	180.0	-60.0	Received
26XMDC0965	Growth	GEO-01-Central	RC	7,633,705	424,050	278	300.0	180.0	-60.0	Pending
26XMDC0966	Growth	GEO-01-Central	RC	7,633,752	424,051	278	372.0	180.0	-60.0	Pending
26XMDC0967	Growth	GEO-01-Main Zone	RC	7,633,814	423,875	278	288.0	180.0	-60.0	Received
26XMDC0968	Growth	GEO-01-Central	RC	7,633,702	423,801	276	90.0	180.0	-60.0	Received
26XMDC0969	Growth	GEO-01-Main Zone	RC	7,633,753	423,801	276	156.0	180.0	-60.0	Received
26XMDC0970	Growth	GEO-01-Main Zone	RC	7,633,800	423,800	276	308.0	180.0	-60.0	Received

Hole ID	Programme	Target/Deposit	Hole Type	Northing (m)	Easting (m)	RL (m)	Hole Depth (m)	Azimuth (°)	Dip (°)	Assay Status
26XMDC0971	Growth	GEO-01-Main Zone	RC	7,633,750	423,750	276	150.0	180.0	-60.0	Received
26XMDC0972	Growth	GEO-01-Central	RC	7,633,785	423,925	278	338.0	180.0	-60.0	Received
26XMDC0973	Growth	Fiama	RC	7,633,366	424,057	275	132.0	328.0	-60.0	Received
26XMDC0974	Growth	Fiama	RC	7,633,449	424,120	279	66.0	180.0	-60.0	Received
26XMDC0975	Growth	GEO-01-South	RC	7,633,335	424,150	275	206.0	0.0	-60.0	Received
26XMDC0976	Growth	Rizzo	RC	7,633,375	423,875	276	150.0	328.0	-60.0	Received
26XMDC0977	Growth	GEO-01-South	RC	7,633,335	424,250	275	240.0	0.0	-60.0	Received
26XMDC0978	Growth	GEO-01-South	RC	7,633,335	424,200	275	240.0	0.0	-60.0	Received
26XMDC0979	Growth	Rizzo	RC	7,633,345	423,834	275	180.0	328.0	-60.0	Received
26XMDC0980	Growth	Rizzo	RC	7,633,260	423,887	275	162.0	328.0	-60.0	Received
26XMDC0981	Growth	Minella	RC	7,633,398	423,919	275	120.0	328.0	-60.0	Received
26XMDC0982	Growth	Rizzo	RC	7,633,356	423,946	275	210.0	328.0	-60.0	Received
26XMDC0983	Growth	Minella	RC	7,633,424	423,962	275	120.0	328.0	-60.0	Received
26XMDC0984	Growth	Fiama	RC	7,633,382	423,988	275	210.0	328.0	-60.0	Received
26XMDC0985	Growth	Fiama	RC	7,633,360	424,075	275	210.0	0.0	-60.0	Received
25MYC0946	Discovery	Yolanda	RC	7,634,041	421,928	272	174.0	58.0	-55.0	Partial
25MYC0948	Discovery	Yolanda	RC	7,634,347	421,730	275	120.0	58.0	-55.0	Received
26XMDC0986	Discovery	Yolanda	RC	7,634,456	421,602	270	150.0	58.0	-55.0	Received
26XMDC0987	Discovery	Yolanda	RC	7,634,347	421,729	268	120.0	58.0	-55.0	Received
26XMDC0988	Discovery	Yolanda	RC	7,634,294	421,645	270	240.0	58.0	-55.0	Received
26XMDC0989	Discovery	Yolanda	RC	7,634,136	421,751	272	234.0	58.0	-55.0	Received
26XMDC0990	Discovery	Yolanda	RC	7,633,988	421,844	272	240.0	58.0	-55.0	Received
26XMDC0991	Discovery	Yolanda	RC	7,633,596	422,146	275	186.0	328.0	-60.0	Received
26XMDC0992	Discovery	Yolanda	RC	7,633,854	421,983	272	156.0	58.0	-55.0	Received
26XMDC0993	Discovery	Minyari	RC	7,635,543	422,155	270	180.0	58.0	-57.0	Received
26XMDC0994	Discovery	Minyari	RC	7,635,538	422,243	270	84.0	58.0	-57.0	Received
26XMDC0995	Discovery	Minyari	RC	7,635,500	422,182	270	150.0	58.0	-57.0	Received
26XMDC0996	Discovery	Minyari	RC	7,635,654	422,145	270	84.0	58.0	-57.0	Received
26XMDC0997	Growth	Rizzo	RC	7,633,361	423,765	275	120.0	328.0	-60.0	Received
26XMDC0998	Growth	Rizzo	RC	7,633,318	423,792	275	120.0	328.0	-60.0	Received
26XMDC0999	Growth	Rizzo	RC	7,633,276	423,818	275	150.0	328.0	-60.0	Received
26XMDC1000	Growth	Rizzo	RC	7,633,294	423,749	275	210.0	328.0	-60.0	Received
26XMDC1001	Growth	Rizzo	RC	7,633,230	423,788	275	270.0	328.0	-60.0	Received
26XMDC1002	Growth	Rizzo	RC	7,633,350	423,654	275	204.0	328.0	-60.0	Received
26XMDC1003	Growth	Rizzo	RC	7,633,308	423,681	275	276.0	328.0	-60.0	Received
26XMDC1004	Growth	Rizzo	RC	7,633,265	423,707	275	186.0	328.0	-60.0	Pending
26XMDC1005	Growth	Rizzo	RC	7,633,202	423,747	275	330.0	328.0	-60.0	Received
26XMDC1006	Growth	Rizzo	RC	7,633,336	423,604	275	258.0	328.0	-60.0	Received
26XMDC1007	Growth	Rizzo	RC	7,633,286	423,636	275	348.0	328.0	-60.0	Received
26XMDC1008	Growth	Rizzo	RC	7,633,243	423,662	275	222.0	328.0	-60.0	Received
26XMDC1009	Growth	GEO-01-South	RC	7,633,255	424,067	275	90.0	328.0	-60.0	Pending
26XMDC1010	Growth	GEO-01-South	RC	7,633,170	424,120	275	264.0	328.0	-60.0	Pending
26XMDC1011	Growth	GEO-01-South	RC	7,633,175	423,940	275	120.0	328.0	-60.0	Pending

Hole ID	Programme	Target/Deposit	Hole Type	Northing (m)	Easting (m)	RL (m)	Hole Depth (m)	Azimuth (°)	Dip (°)	Assay Status
26XMDC1012	Growth	GEO-01-South	RC	7,633,133	423,967	275	138.0	328.0	-60.0	Pending
26XMDC1013	Growth	GEO-01-South	RC	7,633,091	423,993	275	240.0	328.0	-60.0	Pending
26XMDC1014	Growth	GEO-01-South	RC	7,633,096	423,813	275	150.0	328.0	-60.0	Pending
26XMDC1015	Growth	GEO-01-South	RC	7,633,032	423,853	275	180.0	328.0	-60.0	Pending
26XMDC1016	Growth	Fiama	RC	7,633,409	424,030	275	84.0	328.0	-60.0	Pending
26XMDC1017	Discovery	Minyari	RC	7,635,461	422,509	268	240.0	70.0	-60.0	Pending
26XMDC1018	Discovery	Minyari	RC	7,635,770	422,652	270	300.0	180.0	-65.0	Pending
26XMDC1019	Growth	Minyari North	RC	7,636,050	422,900	274	210.0	180.0	-60.0	Pending
26XMDC1020	Growth	Minyari North	RC	7,636,100	422,900	274	276.0	180.0	-60.0	Pending
26XMDC1021	Growth	Minyari North	RC	7,636,075	422,950	274	270.0	180.0	-60.0	Pending
26XMDC1022	Growth	Minyari North	RC	7,636,149	422,851	274	330.0	236.0	-60.0	Pending
26XMDC1023	Growth	Minyari North	RC	7,636,162	422,808	274	240.0	236.0	-60.0	Pending
26XMDC1024	Growth	Minyari North	RC	7,636,186	422,844	274	360.0	236.0	-60.0	Pending
26XMDC1025	Discovery	Judes	RC	7,637,012	421,586	268	400.0	58.0	-60.0	Pending
26XMDC1026	Discovery	Judes	RC	7,636,887	421,687	268	300.0	58.0	-60.0	Pending
26XMDC1027	Discovery	Judes	RC	7,637,166	421,646	268	300.0	238.0	-60.0	Pending
26XMDC1028	Discovery	Judes	RC	7,636,824	421,774	268	276.0	58.0	-60.0	Pending
26XMDC1029	Growth	Minyari North	RC	7,635,928	422,806	275	450.0	190.0	-65.0	Pending
26XMDD0555	Growth	Fiama	DD	7,633,670	423,805	277	860.0	340.0	-68.0	Partial
26XMDD0556	Growth	WACA	DD	7,634,637	422,585	275	538.0	60.0	-65.0	Received
26XMDD0557	Growth	Minyari North	DD	7,636,306	422,804	270	500.0	235.0	-65.0	Pending
26XTDC0045	Discovery	Tims Dome	RC	7,607,588	403,574	298	120.0	46.0	-60.0	Received
26XTDC0046	Discovery	Tims Dome	RC	7,607,519	403,500	298	210.0	46.0	-60.0	Received
26XTDC0047	Discovery	Tims Dome	RC	7,607,841	403,408	305	120.0	46.0	-65.0	Received
26XTDC0048A	Discovery	Tims Dome	RC	7,607,460	404,251	293	144.0	226.0	-70.0	Received
26XTDC0049	Discovery	Tims Dome	RC	7,606,866	404,335	292	156.0	46.0	-70.0	Received
26XTDC0050	Discovery	Tims Dome	RC	7,607,545	404,115	292	264.0	225.0	-65.0	Received
26XTDC0051	Discovery	Tims Dome	RC	7,607,655	404,221	292	189.0	225.0	-65.0	Received
26XTDC0052	Discovery	Tims Dome	RC	7,607,864	403,781	300	246.0	226.0	-65.0	Received
26XTDC0053	Discovery	Tims Dome	RC	7,608,411	402,910	303	240.0	46.0	-65.0	Received
26XTDC0054	Discovery	Tims Dome	RC	7,607,980	403,928	298	204.0	226.0	-65.0	Received
26XTDC0055	Discovery	Tims Dome	RC	7,608,817	403,159	303	312.0	225.0	-65.0	Received
26XTDC0056	Discovery	Tims Dome	RC	7,608,744	403,263	294	270.0	225.0	-65.0	Received
26XTDC0057	Discovery	Tims Dome	RC	7,608,549	403,239	297	150.0	225.0	-65.0	Received
26XTDC0058	Discovery	Tims Dome	RC	7,608,613	403,310	297	150.0	225.0	-65.0	Received
26XTDC0059	Discovery	Tims Dome	RC	7,609,079	402,379	300	300.0	46.0	-65.0	Received
26XTDC0060	Discovery	Tims Dome	RC	7,607,228	403,782	290	310.0	46.0	-60.0	Received
26XTDC0061	Discovery	Tims Dome	RC	7,606,880	404,046	294	210.0	46.0	-65.0	Received
26XTDC0062	Discovery	Tims Dome	RC	7,607,668	403,650	301	210.0	46.0	-65.0	Received
26XTDC0063	Discovery	Tims Dome	RC	7,608,273	403,141	305	210.0	46.0	-60.0	Received
26XTDC0064	Discovery	Tims Dome	RC	7,608,284	402,781	303	198.0	46.0	-65.0	Received
26XTDC0065	Discovery	Tims Dome	RC	7,608,606	402,747	308	120.0	46.0	-65.0	Received
26XTDC0066	Discovery	Tims Dome	RC	7,608,030	403,834	297	210.0	226.0	-65.0	Received

Hole ID	Programme	Target/Deposit	Hole Type	Northing (m)	Easting (m)	RL (m)	Hole Depth (m)	Azimuth (°)	Dip (°)	Assay Status
26XTDC0067	Discovery	Tims Dome	RC	7,607,822	403,898	297	210.0	226.0	-65.0	Received
26XTDC0068	Discovery	Tims Dome	RC	7,607,157	403,849	290	210.0	46.0	-60.0	Received
26XTDC0069	Discovery	Tims Dome	RC	7,607,305	403,722	290	302.0	46.0	-60.0	Received
26XTDC0070	Discovery	Tims Dome	RC	7,607,772	403,341	305	216.0	46.0	-65.0	Received
26XTDC0071	Discovery	Tims Dome	RC	7,608,611	403,498	297	300.0	225.0	-60.0	Received
26XTDC0072	Discovery	Tims Dome	RC	7,608,787	402,406	306	210.0	46.0	-65.0	Received
26XTDC0073	Discovery	Tims Dome	RC	7,608,669	402,459	306	234.0	46.0	-65.0	Received
26XTDC0074	Discovery	Tims Dome	RC	7,608,471	402,604	303	180.0	46.0	-65.0	Received
26XTDC0075	Discovery	Tims Dome	RC	7,608,393	402,530	303	150.0	46.0	-65.0	Received
26XTDC0076	Discovery	Tims Dome	RC	7,607,587	403,953	297	216.0	250.0	-65.0	Received
26XTDC0077	Discovery	Tims Dome	RC	7,607,457	404,168	297	252.0	46.0	-65.0	Received
26XTDC0078	Discovery	Tims Dome	RC	7,607,527	404,239	297	240.0	46.0	-65.0	Received
26XTDC0079	Discovery	Tims Dome	RC	7,607,612	404,052	297	269.0	250.0	-65.0	Partial
26XTDC0080	Discovery	Tims Dome	RC	7,607,721	404,169	297	294.0	250.0	-65.0	Partial
26XTDC0081	Discovery	Tims Dome	RC	7,607,474	404,044	297	204.0	250.0	-65.0	Received
26XTDC0082	Discovery	Tims Dome	RC	7,607,664	403,954	297	168.0	250.0	-65.0	Received
26XTDC0083	Discovery	Tims Dome	RC	7,607,764	403,842	297	258.0	250.0	-65.0	Received
26XTDC0084	Discovery	Tims Dome	RC	7,607,925	403,720	297	300.0	250.0	-65.0	Received
26XTDC0085	Discovery	Tims Dome	RC	7,606,709	404,225	294	236.0	46.0	-65.0	Received
26XTDCBH01	Discovery	Tims Dome	RC	7,607,516	403,998	280	120.0	0.0	-90.0	Received
26XTDD0001	Discovery	Tims Dome	DD	7,607,527	404,008	294	454.3	248.0	-74.0	Pending
26XTDD0002	Discovery	Tims Dome	DD	7,607,555	404,183	295	437.8	250.0	-65.0	Pending

Table 2b: Minyari Project – CY2026 Exploration Programme
Air Core Drill Hole Collar Locations (MGA Zone 51/GDA2020)

Hole ID	Programme	Target/Deposit	Hole Type	Northing (m)	Easting (m)	RL (m)	Hole Depth (m)	Azimuth (°)	Dip (°)	Assay Status
26XCRA0195	Discovery	Chicken Ranch	AC	7,612,305	423,874	265	60.0	215.0	-60.0	Received
26XCRA0196	Discovery	Chicken Ranch	AC	7,612,326	423,889	265	78.0	215.0	-60.0	Received
26XCRA0197	Discovery	Chicken Ranch	AC	7,612,346	423,903	265	60.0	215.0	-60.0	Received
26XCRA0198	Discovery	Chicken Ranch	AC	7,612,367	423,917	265	60.0	215.0	-60.0	Received
26XCRA0199	Discovery	Chicken Ranch	AC	7,612,387	423,932	265	60.0	215.0	-60.0	Received
26XCRA0200	Discovery	Chicken Ranch	AC	7,612,407	423,946	265	60.0	215.0	-60.0	Received
26XCRA0201	Discovery	Chicken Ranch	AC	7,612,428	423,960	265	72.0	215.0	-60.0	Received
26XCRA0202	Discovery	Chicken Ranch	AC	7,612,448	423,975	265	72.0	215.0	-60.0	Received
26XCRA0203	Discovery	Chicken Ranch	AC	7,612,469	423,989	265	67.0	215.0	-60.0	Received
26XCRA0204	Discovery	Chicken Ranch	AC	7,612,489	424,003	265	60.0	215.0	-60.0	Received
26XCRA0205	Discovery	Chicken Ranch	AC	7,612,551	424,046	265	60.0	215.0	-60.0	Received
26XCRA0206	Discovery	Chicken Ranch	AC	7,612,571	424,061	265	60.0	215.0	-60.0	Received
26XCRA0207	Discovery	Chicken Ranch	AC	7,612,592	424,075	265	60.0	215.0	-60.0	Received
26XCRA0208	Discovery	Chicken Ranch	AC	7,612,694	424,147	265	60.0	215.0	-60.0	Received
26XCRA0209	Discovery	Chicken Ranch	AC	7,612,271	424,345	265	60.0	215.0	-60.0	Received
26XCRA0210	Discovery	Chicken Ranch	AC	7,612,291	424,359	265	60.0	215.0	-60.0	Received

Hole ID	Programme	Target/Deposit	Hole Type	Northing (m)	Easting (m)	RL (m)	Hole Depth (m)	Azimuth (°)	Dip (°)	Assay Status
26XCRA0211	Discovery	Chicken Ranch	AC	7,612,332	424,388	265	60.0	215.0	-60.0	Received
26XCRA0212	Discovery	Chicken Ranch	AC	7,612,373	424,416	265	14.0	215.0	-60.0	Received
26XCRA0213	Discovery	Chicken Ranch	AC	7,612,414	424,445	265	60.0	215.0	-60.0	Received
26XCRA0214	Discovery	Chicken Ranch	AC	7,612,455	424,474	265	66.0	215.0	-60.0	Received
26XCRA0215	Discovery	Chicken Ranch	AC	7,612,037	424,425	265	60.0	215.0	-60.0	Received
26XCRA0216	Discovery	Chicken Ranch	AC	7,612,058	424,440	265	60.0	215.0	-60.0	Received
26XCRA0217	Discovery	Chicken Ranch	AC	7,612,078	424,454	265	66.0	215.0	-60.0	Received
26XCRA0218	Discovery	Chicken Ranch	AC	7,612,099	424,468	265	63.0	215.0	-60.0	Received
26XCRA0219	Discovery	Chicken Ranch	AC	7,612,119	424,483	265	50.0	215.0	-60.0	Received
26XCRA0220	Discovery	Chicken Ranch	AC	7,612,160	424,511	265	60.0	215.0	-60.0	Received
26XCRA0221	Discovery	Chicken Ranch	AC	7,612,201	424,540	265	60.0	215.0	-60.0	Received
26XCRA0222	Discovery	Chicken Ranch	AC	7,612,242	424,569	265	60.0	215.0	-60.0	Received
26XCRA0223	Discovery	Chicken Ranch	AC	7,612,283	424,598	265	60.0	215.0	-60.0	Received
26XCRA0224	Discovery	Chicken Ranch	AC	7,612,324	424,626	265	60.0	215.0	-60.0	Received
26XCRA0225	Discovery	Chicken Ranch	AC	7,612,013	424,499	265	60.0	215.0	-60.0	Received
26XCRA0226	Discovery	Chicken Ranch	AC	7,612,034	424,513	265	60.0	215.0	-60.0	Received
26XCRA0227	Discovery	Chicken Ranch	AC	7,612,054	424,528	265	60.0	215.0	-60.0	Received
26XCRA0228	Discovery	Chicken Ranch	AC	7,612,083	424,548	265	54.0	215.0	-60.0	Received
26XCRA0229	Discovery	Chicken Ranch	AC	7,611,642	424,690	265	69.0	215.0	-60.0	Received
26XCRA0230	Discovery	Chicken Ranch	AC	7,611,662	424,704	265	84.0	215.0	-60.0	Received
26XCRA0231	Discovery	Chicken Ranch	AC	7,611,683	424,718	265	66.0	215.0	-60.0	Received
26XCRA0232	Discovery	Chicken Ranch	AC	7,611,703	424,733	265	63.0	215.0	-60.0	Received
26XCRA0233	Discovery	Chicken Ranch	AC	7,611,724	424,747	265	60.0	215.0	-60.0	Received
26XCRA0234	Discovery	Chicken Ranch	AC	7,611,744	424,761	265	60.0	215.0	-60.0	Received
26XCRA0235	Discovery	Chicken Ranch	AC	7,611,785	424,790	265	60.0	215.0	-60.0	Received
26XCRA0236	Discovery	Chicken Ranch	AC	7,611,826	424,819	265	60.0	215.0	-60.0	Received
26XCRA0237	Discovery	Chicken Ranch	AC	7,611,867	424,847	265	60.0	215.0	-60.0	Received
26XCRA0238	Discovery	Chicken Ranch	AC	7,611,908	424,876	265	60.0	215.0	-60.0	Received
26XCRA0239	Discovery	Chicken Ranch	AC	7,611,949	424,905	265	60.0	215.0	-60.0	Received
26XCRA0240	Discovery	Chicken Ranch	AC	7,611,990	424,934	265	58.0	215.0	-60.0	Received
26XCRA0241	Discovery	Chicken Ranch	AC	7,611,368	425,010	262	63.0	215.0	-60.0	Received
26XCRA0242	Discovery	Chicken Ranch	AC	7,611,389	425,024	262	78.0	215.0	-60.0	Received
26XCRA0243	Discovery	Chicken Ranch	AC	7,611,409	425,039	262	60.0	215.0	-60.0	Received
26XCRA0244	Discovery	Chicken Ranch	AC	7,611,448	425,070	262	60.0	215.0	-60.0	Received
26XCRA0245	Discovery	Chicken Ranch	AC	7,611,600	425,185	262	66.0	215.0	-60.0	Received
26XCRA0246	Discovery	Chicken Ranch	AC	7,611,680	425,245	262	60.0	215.0	-60.0	Received
26XCRA0247	Discovery	Chicken Ranch	AC	7,611,760	425,305	262	60.0	215.0	-60.0	Received
26XCRA0248	Discovery	Chicken Ranch	AC	7,612,169	423,383	265	72.0	215.0	-60.0	Received
26XCRA0249	Discovery	Chicken Ranch	AC	7,612,248	423,443	265	60.0	215.0	-60.0	Received
26XCRA0250	Discovery	Chicken Ranch	AC	7,612,331	423,506	265	58.0	215.0	-60.0	Received
26XCRA0251	Discovery	Chicken Ranch	AC	7,612,408	423,564	265	60.0	215.0	-60.0	Received
26XCRA0252	Discovery	Chicken Ranch	AC	7,612,488	423,624	265	60.0	215.0	-60.0	Received
26XCRA0253	Discovery	Chicken Ranch	AC	7,612,550	423,667	265	60.0	215.0	-60.0	Received

Hole ID	Programme	Target/Deposit	Hole Type	Northing (m)	Easting (m)	RL (m)	Hole Depth (m)	Azimuth (°)	Dip (°)	Assay Status
26XCRA0254	Discovery	Chicken Ranch	AC	7,612,571	423,682	265	60.0	215.0	-60.0	Received
26XCRA0255	Discovery	Chicken Ranch	AC	7,612,591	423,696	265	60.0	215.0	-60.0	Received
26XCRA0256	Discovery	Chicken Ranch	AC	7,612,611	423,710	265	60.0	215.0	-60.0	Received
26XCRA0257	Discovery	Chicken Ranch	AC	7,612,652	423,739	265	60.0	215.0	-60.0	Received
26XCRA0258	Discovery	Chicken Ranch	AC	7,612,732	423,799	265	63.0	215.0	-60.0	Received
26XCRA0259	Discovery	Chicken Ranch	AC	7,612,812	423,859	265	66.0	215.0	-60.0	Received
26XCRA0260	Discovery	Chicken Ranch	AC	7,612,891	423,919	265	60.0	215.0	-60.0	Received
26XCRA0261	Discovery	Chicken Ranch	AC	7,612,932	423,948	265	60.0	215.0	-60.0	Received
26XCRA0262	Discovery	Chicken Ranch	AC	7,612,971	423,979	265	60.0	215.0	-60.0	Received
26XCRA0263	Discovery	Chicken Ranch	AC	7,613,051	424,040	265	60.0	215.0	-60.0	Received
26XCRA0264	Discovery	Chicken Ranch	AC	7,613,131	424,100	265	60.0	215.0	-60.0	Received
26XCRA0265	Discovery	Chicken Ranch	AC	7,612,759	423,577	265	60.0	215.0	-60.0	Received
26XCRA0266	Discovery	Chicken Ranch	AC	7,612,831	423,632	265	60.0	215.0	-60.0	Received
26XCRA0267	Discovery	Chicken Ranch	AC	7,612,911	423,692	265	66.0	215.0	-60.0	Received
26XCRA0268	Discovery	Chicken Ranch	AC	7,612,991	423,752	265	66.0	215.0	-60.0	Received
26XCRA0269	Discovery	Chicken Ranch	AC	7,613,032	423,781	265	60.0	215.0	-60.0	Received
26XCRA0270	Discovery	Chicken Ranch	AC	7,613,071	423,812	265	56.0	215.0	-60.0	Received
26XCRA0271	Discovery	Chicken Ranch	AC	7,613,151	423,872	265	60.0	215.0	-60.0	Received
26XCRA0272	Discovery	Chicken Ranch	AC	7,613,223	423,926	265	60.0	215.0	-60.0	Received
26XCRA0273	Discovery	Chicken Ranch	AC	7,613,335	422,902	265	60.0	215.0	-60.0	Received
26XCRA0274	Discovery	Chicken Ranch	AC	7,612,653	424,118	265	60.0	215.0	-60.0	Pending
26XCRA0275	Discovery	Chicken Ranch	AC	7,613,415	422,962	265	60.0	215.0	-60.0	Pending
26XCRA0276	Discovery	Chicken Ranch	AC	7,613,495	423,022	265	60.0	215.0	-60.0	Pending
26XCRA0277	Discovery	Chicken Ranch	AC	7,613,575	423,082	265	60.0	215.0	-60.0	Pending
26XCRA0278	Discovery	Chicken Ranch	AC	7,613,654	423,142	265	60.0	215.0	-60.0	Pending
26XCRA0279	Discovery	Chicken Ranch	AC	7,613,734	423,202	265	60.0	215.0	-60.0	Pending
26XCRA0280	Discovery	Chicken Ranch	AC	7,612,031	424,962	265	100.0	215.0	-60.0	Pending
26XCRA0281	Discovery	Chicken Ranch	AC	7,612,093	424,555	265	100.0	265.0	-60.0	Pending
26XMDA0001	Discovery	Yolanda Trend	AC	7,634,029	421,220	268	55.0	0.0	-90.0	Received
26XMDA0002	Discovery	Yolanda Trend	AC	7,634,135	421,390	268	59.0	0.0	-90.0	Received
26XMDA0003	Discovery	Yolanda Trend	AC	7,634,241	421,560	268	30.0	0.0	-90.0	Received
26XMDA0004	Discovery	Yolanda Trend	AC	7,633,829	421,589	273	81.0	0.0	-90.0	Received
26XMDA0005	Discovery	Yolanda Trend	AC	7,633,935	421,759	273	75.0	0.0	-90.0	Received
26XMDA0006	Discovery	Yolanda Trend	AC	7,634,298	420,803	273	99.0	0.0	-90.0	Received
26XMDA0007	Discovery	Yolanda Trend	AC	7,634,404	420,973	273	66.0	0.0	-90.0	Received
26XMDA0008	Discovery	Yolanda Trend	AC	7,634,509	421,142	273	39.0	0.0	-90.0	Received
26XMDA0009	Discovery	Yolanda Trend	AC	7,634,615	421,312	273	56.0	0.0	-90.0	Received
26XMDA0010	Discovery	Yolanda Trend	AC	7,634,721	421,481	273	96.0	0.0	-90.0	Received
26XMDA0011	Discovery	Yolanda Trend	AC	7,633,491	421,976	273	99.0	0.0	-90.0	Received
26XMDA0012	Discovery	Yolanda Trend	AC	7,633,703	422,315	273	48.0	0.0	-90.0	Received
26XMDA0013	Discovery	Yolanda Trend	AC	7,633,597	422,145	273	140.0	0.0	-90.0	Pending
26XMDA0014	Discovery	Yolanda Trend	AC	7,634,536	420,526	273	23.0	0.0	-90.0	Received
26XMDA0015	Discovery	Yolanda Trend	AC	7,634,642	420,695	273	102.0	0.0	-90.0	Received

Hole ID	Programme	Target/Deposit	Hole Type	Northing (m)	Easting (m)	RL (m)	Hole Depth (m)	Azimuth (°)	Dip (°)	Assay Status
26XMDA0016	Discovery	Yolanda Trend	AC	7,634,748	420,865	273	132.0	0.0	-90.0	Received
26XMDA0017	Discovery	Yolanda Trend	AC	7,634,854	421,035	273	66.0	0.0	-90.0	Received
26XMDA0018	Discovery	Yolanda Trend	AC	7,634,960	421,204	273	139.0	0.0	-90.0	Received
26XMDA0019	Discovery	Yolanda Trend	AC	7,637,087	418,856	274	85.0	0.0	-90.0	Received
26XMDA0020	Discovery	Yolanda Trend	AC	7,636,481	419,016	274	90.0	0.0	-90.0	Received
26XMDA0021	Discovery	Yolanda Trend	AC	7,636,683	419,343	274	87.0	0.0	-90.0	Received
26XMDA0022	Discovery	Yolanda Trend	AC	7,636,894	419,683	274	70.0	0.0	-90.0	Received
26XMDA0023	Discovery	Yolanda Trend	AC	7,635,736	419,052	274	93.0	0.0	-90.0	Received
26XMDA0024	Discovery	Yolanda Trend	AC	7,635,948	419,391	274	74.0	0.0	-90.0	Received
26XMDA0025	Discovery	Yolanda Trend	AC	7,636,160	419,731	274	33.0	0.0	-90.0	Received
26XMDA0026	Discovery	Yolanda Trend	AC	7,636,372	420,070	274	54.0	0.0	-90.0	Received
26XMDA0027	Discovery	Yolanda Trend	AC	7,635,092	419,431	274	100.0	0.0	-90.0	Received
26XMDA0028	Discovery	Yolanda Trend	AC	7,635,304	419,770	274	56.0	0.0	-90.0	Received
26XMDA0029	Discovery	Yolanda Trend	AC	7,635,516	420,109	274	46.0	0.0	-90.0	Received
26XMDA0030	Discovery	Yolanda Trend	AC	7,635,728	420,448	274	44.0	0.0	-90.0	Received
26XMDA0031	Discovery	Yolanda Trend	AC	7,635,940	420,787	274	90.0	0.0	-90.0	Received
26XMDA0032	Discovery	Yolanda Trend	AC	7,637,301	419,195	274	90.0	0.0	-90.0	Received
26XMDA0033	Discovery	Yolanda Trend	AC	7,637,108	420,021	274	46.0	0.0	-90.0	Received
26XTUA0001	Discovery	AL01	AC	7,654,666	416,653	265	60.0	0.0	-90.0	Received
26XTUA0002	Discovery	AL01	AC	7,654,687	416,484	265	57.0	0.0	-90.0	Received
26XTUA0003	Discovery	AL01	AC	7,654,483	416,366	265	36.0	0.0	-90.0	Received
26XTUA0004	Discovery	AL01	AC	7,654,607	416,458	265	76.0	0.0	-90.0	Received
26XTUA0005	Discovery	AL01	AC	7,653,973	416,253	265	24.0	0.0	-90.0	Received
26XTUA0006	Discovery	AL01	AC	7,654,319	416,453	265	15.0	0.0	-90.0	Received
26XTUA0007	Discovery	AL01	AC	7,654,493	416,553	265	60.0	0.0	-90.0	Received
26XTUA0008	Discovery	AL01	AC	7,654,592	416,667	265	71.0	0.0	-90.0	Received
26XTUA0009	Discovery	AL01	AC	7,654,648	416,809	265	55.0	0.0	-90.0	Received
26XTUA0010	Discovery	AL01	AC	7,654,398	416,664	265	52.0	0.0	-90.0	Received
26XTUA0011	Discovery	AL01	AC	7,654,528	416,739	265	48.0	0.0	-90.0	Received
26XTUA0012	Discovery	AL01	AC	7,654,257	415,883	265	32.0	0.0	-90.0	Received
26XTUA0013	Discovery	AL01	AC	7,654,426	415,983	265	27.0	0.0	-90.0	Received
26XTUA0014	Discovery	AL01	AC	7,654,515	416,033	265	35.0	0.0	-90.0	Received
26XTUA0015	Discovery	AL01	AC	7,654,774	416,184	265	54.0	0.0	-90.0	Received
26XTUA0016	Discovery	AL01	AC	7,654,331	415,652	265	46.0	0.0	-90.0	Received
26XTUA0017	Discovery	AL01	AC	7,654,544	415,823	265	40.0	0.0	-90.0	Received
26XTUA0018	Discovery	AL01	AC	7,654,630	415,872	265	39.0	0.0	-90.0	Received
26XTUA0019	Discovery	AL01	AC	7,654,720	415,919	265	47.0	0.0	-90.0	Received
26XTUA0020	Discovery	AL01	AC	7,654,402	415,140	265	35.0	0.0	-90.0	Received
26XTUA0021	Discovery	AL01	AC	7,654,576	415,240	265	47.0	0.0	-90.0	Received
26XTUA0022	Discovery	AL01	AC	7,654,920	415,444	265	30.0	0.0	-90.0	Received
26XTUA0023	Discovery	AL01	AC	7,654,748	415,344	265	18.0	0.0	-90.0	Received
26XTUA0024	Discovery	AL01	AC	7,654,667	415,474	265	21.0	0.0	-90.0	Received
26XTUA0025	Discovery	AL01	AC	7,654,651	415,668	265	33.0	0.0	-90.0	Received

Hole ID	Programme	Target/Deposit	Hole Type	Northing (m)	Easting (m)	RL (m)	Hole Depth (m)	Azimuth (°)	Dip (°)	Assay Status
26XTUA0026	Discovery	AL01	AC	7,654,626	416,063	265	42.0	0.0	-90.0	Received
26XTUA0027	Discovery	AL01	AC	7,654,615	416,268	265	42.0	0.0	-90.0	Received
26XTUA0028	Discovery	AL01	AC	7,654,580	416,864	265	51.0	0.0	-90.0	Received
26XTUA0029	Discovery	AL01	AC	7,653,942	416,660	265	21.0	0.0	-90.0	Received
26XTUA0030	Discovery	AL01	AC	7,654,254	416,915	265	58.0	0.0	-90.0	Received
26XTUA0031	Discovery	AL01	AC	7,654,330	416,975	265	38.0	0.0	-90.0	Received
26XTUA0032	Discovery	AL01	AC	7,654,540	417,143	265	69.0	0.0	-90.0	Received
26XTUA0033	Discovery	AL01	AC	7,653,724	416,847	265	56.0	0.0	-90.0	Received
26XTUA0034	Discovery	AL01	AC	7,654,070	417,047	265	50.0	0.0	-90.0	Received
26XTUA0035	Discovery	AL01	AC	7,654,243	417,147	265	57.0	0.0	-90.0	Received
26XTUA0036	Discovery	AL01	AC	7,654,416	417,248	265	85.0	0.0	-90.0	Received
26XTUA0037	Discovery	AL01	AC	7,653,411	418,934	265	71.0	0.0	-90.0	Received
26XTUA0038	Discovery	AL01	AC	7,653,492	418,408	265	75.0	0.0	-90.0	Received
26XTUA0039	Discovery	AL01	AC	7,653,230	418,832	265	76.0	0.0	-90.0	Received
26XTUA0040	Discovery	AL01	AC	7,652,996	419,278	265	91.0	0.0	-90.0	Received
26XTUA0041	Discovery	AL01	AC	7,653,173	419,377	265	75.0	0.0	-90.0	Received
26XTUA0042	Discovery	AL01	AC	7,653,308	420,035	265	95.0	0.0	-90.0	Received
26XTUA0043	Discovery	AL01	AC	7,653,491	420,137	265	64.0	0.0	-90.0	Received
26XTUA0044	Discovery	AL01	AC	7,653,750	418,561	265	91.0	0.0	-90.0	Received
26XTUA0045	Discovery	AL01	AC	7,653,924	418,658	265	82.0	0.0	-90.0	Received
26XTUA0046	Discovery	AL01	AC	7,653,830	418,807	265	99.0	0.0	-90.0	Received
26XTUA0047	Discovery	AL01	AC	7,653,752	418,991	265	61.0	0.0	-90.0	Received
26XTUA0048	Discovery	AL01	AC	7,653,832	419,137	265	123.0	0.0	-90.0	Received
26XTUA0049	Discovery	AL01	AC	7,653,595	419,359	265	88.0	0.0	-90.0	Received
26XTUA0050	Discovery	AL01	AC	7,653,810	419,498	265	67.0	0.0	-90.0	Received
26XTUA0051	Discovery	AL01	AC	7,653,661	419,655	265	129.0	0.0	-90.0	Received
26XTUA0052	Discovery	AL01	AC	7,653,519	419,578	265	93.0	0.0	-90.0	Received
26XTUA0053	Discovery	AL01	AC	7,653,393	417,773	265	28.0	0.0	-90.0	Received
26XTUA0054	Discovery	AL01	AC	7,653,740	417,973	265	17.0	0.0	-90.0	Received
26XTUA0055	Discovery	AL01	AC	7,654,086	418,173	265	94.0	0.0	-90.0	Received
26XTUA0056	Discovery	AL01	AC	7,652,744	420,019	265	80.0	0.0	-90.0	Received
26XTUA0057	Discovery	AL01	AC	7,652,918	420,119	265	87.0	0.0	-90.0	Received
26XTUA0058	Discovery	AL01	AC	7,653,091	420,219	265	94.0	0.0	-90.0	Received
26XTUA0059	Discovery	AL01	AC	7,653,264	420,319	265	60.0	0.0	-90.0	Received
26XTUA0060	Discovery	AL01	AC	7,653,351	420,369	265	72.0	0.0	-90.0	Received
26XTUA0061	Discovery	AL01	AC	7,652,778	419,730	265	73.0	0.0	-90.0	Received
26XTUA0062	Discovery	AL01	AC	7,652,953	419,829	265	71.0	0.0	-90.0	Received
26XTUA0063	Discovery	AL01	AC	7,653,134	419,934	265	90.0	0.0	-90.0	Received
26XTUA0064	Discovery	AL01	AC	7,655,086	418,753	265	60.0	0.0	-90.0	Received
26XTUA0065	Discovery	AL01	AC	7,654,912	418,654	265	82.0	0.0	-90.0	Received
26XTUA0066	Discovery	AL01	AC	7,655,087	418,537	265	42.0	0.0	-90.0	Received
26XTUA0067	Discovery	AL01	AC	7,654,912	418,436	265	63.0	0.0	-90.0	Received
26XTUA0068	Discovery	AL01	AC	7,655,136	418,202	265	86.0	0.0	-90.0	Received

Hole ID	Programme	Target/Deposit	Hole Type	Northing (m)	Easting (m)	RL (m)	Hole Depth (m)	Azimuth (°)	Dip (°)	Assay Status
26XTUA0069	Discovery	AL01	AC	7,654,963	418,101	265	71.0	0.0	-90.0	Received
26XTUA0070	Discovery	AL01	AC	7,655,382	417,187	265	42.0	0.0	-90.0	Received
26XTUA0071	Discovery	AL01	AC	7,650,513	422,511	265	80.0	0.0	-90.0	Pending
26XTUA0072	Discovery	AL01	AC	7,650,478	422,606	265	66.0	0.0	-90.0	Pending
26XTUA0073	Discovery	AL01	AC	7,650,430	422,693	265	80.0	0.0	-90.0	Pending
26XWGA0001	Discovery	Parklands	AC	7,607,010	430,197	265	153.0	0.0	-90.0	Pending
26XWGA0002	Discovery	Parklands	AC	7,606,844	430,085	265	150.0	0.0	-90.0	Pending
26XWGA0003	Discovery	Parklands	AC	7,606,674	429,980	265	150.0	0.0	-90.0	Pending
26XWGA0004	Discovery	Parklands	AC	7,606,503	429,876	265	99.0	0.0	-90.0	Pending
26XWGA0005	Discovery	Parklands	AC	7,607,387	429,960	265	132.0	0.0	-90.0	Pending
26XWGA0006	Discovery	Parklands	AC	7,607,224	429,843	265	150.0	0.0	-90.0	Pending
26XWGA0007	Discovery	Parklands	AC	7,607,048	429,748	265	135.0	0.0	-90.0	Pending
26XWGA0008	Discovery	Parklands	AC	7,607,489	429,313	265	90.0	0.0	-90.0	Pending
26XWGA0009	Discovery	Parklands	AC	7,607,611	429,394	265	126.0	0.0	-90.0	Pending
26XWGA0010	Discovery	Jezabeel	AC	7,602,838	423,852	280	120.0	0.0	-90.0	Pending
26XWGA0011	Discovery	Jezabeel	AC	7,602,938	423,569	280	111.0	0.0	-90.0	Pending
26XWGA0012	Discovery	Jezabeel	AC	7,603,039	423,286	280	99.0	0.0	-90.0	Pending
26XWGA0013	Discovery	Jezabeel	AC	7,603,139	423,003	280	150.0	0.0	-90.0	Pending
26XWGA0014	Discovery	Jezabeel	AC	7,603,239	422,720	280	150.0	0.0	-90.0	Pending
26XWGA0015	Discovery	Jezabeel	AC	7,603,339	422,438	280	125.0	0.0	-90.0	Pending

Table 2 Drill Hole Collar Notes:

Refer to JORC Table 1 Section 1 for full drill hole information; including drill technique, sampling, analytical technique/s, etc.

Hole ID Annotation:

Hole ID* = Drillhole/s Abandoned

Hole ID# = Drillhole/s In Progress

Drill Type Annotation:

RC = Reverse Circulation

DD = Diamond Core

DD Tail = Diamond Core depth extension of a pre-existing RC or DD drill hole

AC = Air Core

Programme Annotation:

Discovery-Focused Drill Programme = Discovery

Resource Growth-Focused Drill Programme = Growth

Pre-feasibility Study (PFS) Drill Programme = PFS (NB: Includes Mineral Resource Definition)

Geotech = PFS holes drilled to collect geotechnical data for mine design purposes

Sterilisation Drill Programme = Sterilisation (NB: Generally for the purpose of locating infrastructure)

In relation to Exploration Results extracted from previously announced reports (see reference list below), the Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement, all of which are available to view on www.antipaminerals.com.au and www.asx.com.au. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcements.

Various information in this announcement which relates to Exploration Results have been extracted from the following announcements lodged on the ASX, where further details, including JORC Code reporting tables, can also be found:

• North Telfer Project Update on Former NCM Mining Leases	3 December 2015
• High Grade Gold Mineralisation at Minyari Dome	8 February 2016
• Minyari Deposit Drilling to Commence May 2016	2 May 2016
• Minyari Phase 1 Drilling Commences	2 June 2016
• Further Historical High-grade Gold Intersections at Minyari	14 June 2016
• Minyari Phase 1 Drilling Update No. 1	20 July 2016
• Completion of Phase 1 Minyari Deposit RC Drilling Programme	9 August 2016
• Minyari Drilling Update No. 3	17 August 2016
• Minyari Drilling Update No. 4	29 September 2016
• North Telfer and Citadel Exploration Programme Update	16 November 2016
• Minyari Dome Drilling Update No. 1	16 December 2016
• Minyari Dome and Citadel – Phase 2 Update	9 February 2017
• Minyari Dome Positive Metallurgical Test Work Results	13 June 2017
• High-Grade Gold Intersected at North Telfer Project Revised	21 June 2017
• Drilling Extends High-Grade Gold Mineralisation at WACA	25 July 2017
• High-Grade Gold Mineralisation Strike Extension at Minyari Deposit	4 August 2017
• Minyari Dome Phase 1 Final Assay Results	31 August 2017
• Air Core Programme Highlights Minyari and WACA Deposit	5 December 2017
• Minyari Dome 2017 Air Core Drilling Results	29 January 2018
• Minyari Dome – Initial Drill Results	1 August 2018
• Thick High-grade Copper Mineralisation Intersected	2 October 2018
• Chicken Ranch and Minyari Dome Drilling Update	15 November 2018
• Chicken Ranch and Tims Dome Maiden Mineral Resources Boost Antipa 100% Resource to 827000 oz	12 May 2019
• 2019 exploration programme update - 100% Owned Paterson Province Tenure	22 August 2019
• High-grade gold & multiple zones of copper-gold mineralisation identified at 100% owned ground	18 October 2019
• Antipa delivers strong results from multiple prospects on 100% owned ground	22 November 2019
• Multiple New Gold-Copper Targets on 100% Owned Ground	23 December 2019
• Wilki AEM Survey Highlights Exciting Havieron Style Targets	18 August 2020
• Drilling of New Targets Deliver Significant Au Intersections	16 February 2021
• Target Generation Air Core programme extends Poblano mineralised gold zone by 500 metres	5 March 2021
• Wilki JV Project Update – New Targets and 2020 Drill Results	11 March 2021
• High-Grade Gold Intersected at Minyari & WACA Deposits	7 April 2021
• Discovery of Significant Zones of High-Grade Gold at Minyari	15 July 2021
• Further High-Grade Gold Mineralisation at Minyari Deposit	20 July 2021
• Further High-Grade Gold Results at 100% Minyari Deposit	12 August 2021
• Outstanding Gold Intersections at 100% Owned Minyari Deposit	6 September 2021
• Further High-Grade Gold Results at 100% Minyari Deposit	5 October 2021
• Significant Gold-Copper Discovery at 100% Minyari Project	19 October 2021
• Further Significant Gold-Copper Discoveries at Minyari	29 November 2021
• Further High-Grade Gold Results at 100% Minyari Deposit	6 December 2021
• Wilki and Paterson Farm-in Projects Exploration Update	20 December 2021
• Further Outstanding High-Grade Gold Results at Minyari	3 February 2022
• Results Confirm High-Grade Gold-Copper at Depth at Minyari	3 March 2022
• High-Priority Soil and AC Gold-Copper Targets Identified	27 May 2022
• Drill Results Confirm High-Grade Gold at Minyari North	21 July 2022
• Minyari Drilling Identifies Resource Growth Opportunities	10 November 2022
• Resource Drilling Increases Minyari Deposit Confidence	2 March 2023
• Two New Discoveries at 100% Owned Minyari Dome Project	6 March 2023
• Paterson Project and Citadel JV Exploration Results	11 May 2023
• Paterson and Wilki Projects - FY2024 Exploration Programme Update	24 July 2023
• Near-Surface High-Grade Gold Discovery at GEO-01 Target	2 August 2023
• Final CY2023 Phase 1 Drill Results - Minyari Gold Project	15 August 2023
• High-Grade Gold Zones at GEO-01 Discovery	12 October 2023

• <i>New gold target identified close to Telfer</i>	20 December 2023
• <i>Minyari Project - Phase 2 2023 Exploration Drilling</i>	21 December 2023
• <i>Minyari Dome Project – Final Assay Results from Phase 2 CY2023 Diamond Drilling</i>	6 February 2024
• <i>Minyari Project - Results from CY2023 Air Core Drilling</i>	8 March 2024
• <i>Large gold target identified close to Minyari</i>	28 March 2024
• <i>High Grade Gold Intersections at GEO-01 – Minyari Dome Project</i>	14 May 2024
• <i>GEO-01 Gold Mineralisation Strike Doubled – Minyari Dome Project</i>	4 June 2024
• <i>GEO-01 Returns Near-Surface High-Grade Gold - Including 35m at 3.0 g/t Gold from 20m</i>	10 July 2024
• <i>Gold Mineralisation Confirmed at Pacman</i>	30 August 2024
• <i>100% Owned Minyari Dome Project Grows by 573,000 Oz of Gold</i>	17 September 2024
• <i>Minyari Scoping Study Update Confirms Development Potential</i>	24 October 2024
• <i>GEO-01 South Returns Multiple New Zones of Near-Surface Gold, including 23m at 2.8 g/t gold from 77m</i>	25 November 2024
• <i>Second surface geochemical gold target identified close to Telfer</i>	13 December 2024
• <i>Multiple New Zones of Near-Surface, High-Grade Gold Discovered – Minyari Dome Project</i>	16 December 2024
• <i>Multiple High-Grade Gold and Copper Intersections at Minyari</i>	29 January 2025
• <i>Antipa to Retain 100% Ownership of Wilki Project</i>	4 March 2025
• <i>Antipa Retains 100% Ownership of Paterson Project (Amended)</i>	9 April 2025
• <i>Resource Growth and Discovery Drilling Commences at Minyari</i>	16 April 2025
• <i>Minyari Project Resource Grows by 100 Koz to 2.5 Moz of Gold</i>	21 May 2025
• <i>Significant New Gold-Copper Discovery at Minyari Dome</i>	30 June 2025
• <i>Expanded Gold-Copper Discovery and Extensions at Minyari</i>	1 August 2025
• <i>Bonanza New Gold Intersections Returned from Fiamma</i>	25 August 2025
• <i>Exceptional Gold Intersections from the Minyari Deposit</i>	30 September 2025
• <i>High-Grade gold results support Resource growth at Minyari</i>	13 October 2025
• <i>Further High-Grade Gold Intersections at Fiamma and Minyari</i>	10 November 2025
• <i>Discoveries at RPS and Minyari Depth Target Confirmed</i>	8 December 2025
• <i>Minyari Development Project - PFS Workstreams Update</i>	16 December 2025
• <i>Minyari Development Resource Grows to 3.3Moz Gold Equivalent</i>	18 December 2025
• <i>Antipa Delivers Multiple New Gold and Copper Discoveries</i>	5 February 2026
• <i>Minyari Project Resource Grows to 3.6 Moz Gold Equivalent</i>	2 April 2026
• <i>Commencement of Major Drilling Campaign across Minyari</i>	20 April 2026
• <i>PFS Test-work Confirms Gold-Copper Processing</i>	7 July 2026
• <i>Phase 1 Drill Results Extend Gold Mineralisation at Fiamma</i>	13 July 2026
• <i>Phase 1 Drilling strengthens Telfer-style Reef Target</i>	3 August 2026
• <i>Gold-Copper Mineralisation extended at Tims Dome AEM Target</i>	31 August 2026
• <i>Tims Dome Gold-Copper Mineralisation Intersected over 2.2km of Strike</i>	21 September 2026
• <i>PFS workstreams determine Optimal Development Configuration</i>	22 September 2026

Competent Persons Statement – Exploration Results: The information in this document that relates to Exploration Results is based on and fairly represents information and supporting documentation compiled by Mr Roger Mason, a Competent Person who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Mason is a full-time employee of the Company. Mr Mason is the Managing Director of Antipa Minerals Limited, is a substantial shareholder of the Company and is an option holder of the Company. Mr Mason has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Mason consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

Competent Persons Statement – Mineral Resource Estimations for the Minyari Project Deposits: The information in this document that relates to the estimation and reporting of the Minyari, WACA, WACA West and Sundown deposit Mineral Resources is extracted from the report entitled "Minyari Project Resource Grows to 3.6 Moz Gold Equivalent" created on 2 April 2026 with Competent Person Jane Levett. The information in this document that relates to the estimation and reporting of the: (1) GEO-01 Main Zone, Fiamma, Minella, GEO-01 Central, Rizzo, GEO-01 South and RPS deposit Mineral Resources is extracted from the report entitled "Minyari Project Resource Grows to 3.6 Moz Gold Equivalent" created on 2 April 2026; (2) Minyari South deposit Mineral Resource is extracted from the report entitled "Minyari Development Resource Grows to 3.3Moz Gold Equivalent" created on 18 December 2025; (3) Tim's Dome and Chicken Ranch deposits Mineral Resources are extracted from the report entitled "Minyari Project Resource Grows by 100 koz to 2.5 Moz of Gold" created on 21 May 2025; and (4) Minyari North deposit Mineral Resource is extracted from the report entitled "100% Owned Minyari Dome Project Grows by 573,000 Oz of Gold" created on 17 September 2024; with Competent Person Victoria Lawns. These reports are available to view on www.antipaminerals.com.au and www.asx.com.au. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements and that all material assumptions and technical parameters underpinning the estimates in the relevant original market announcements continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Persons' findings are presented have not been materially modified from the original market announcements.

Competent Persons Statement – Metallurgy: The metallurgy and the processing information in this announcement is based on and fairly represents information compiled or reviewed by Mr Nick Vines. Mr Vines is a full-time employee of Strategic Metallurgy Pty Ltd. Mr Vines has confirmed that he has read and understood the requirements of the 2012 Edition of the Australian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Vines is a Competent Person as defined by the JORC Code 2012 Edition, having more than five years' experience which is relevant to the processing method and type of deposit under consideration and to the activity for which he is accepting responsibility. Mr Vines is a Member of the AusIMM and consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

Scoping Study for Minyari Dome: The information in this document that relates to the Scoping Study for Minyari Dome is extracted from the report entitled "Minyari Scoping Study Update Confirms Development Potential" reported on 24 October 2024, which is available to view on www.antipaminerals.com.au and www.asx.com.au.

Minyari Project April 2026 Mineral Resource Estimate

MINYARI DOME DEPOSIT MINERAL RESOURCES									
Deposit	Tonnes	Au g/t	Au Ounces	Ag g/t	Ag Ounces	Cu %	Cu Tonnes	Co %	Co Tonnes
Minyari Total Indicated Resource	34,000,000	1.69	1,842,000	0.55	605,000	0.20	70,000	0.03	11,000
Minyari Total Inferred Resource	900,000	1.75	50,000	0.29	8,000	0.13	1,000	0.03	200
Minyari Total Mineral Resource	35,000,000	1.69	1,890,000	0.55	610,000	0.20	70,000	0.03	11,000
WACA Total Indicated Resource	3,100,000	1.35	130,000	0.22	21,000	0.13	4,000	0.02	700
WACA Total Inferred Resource	2,400,000	1.17	90,000	0.22	17,000	0.11	3,000	0.02	600
WACA Total Mineral Resource	5,400,000	1.27	220,000	0.22	38,000	0.12	7,000	0.02	1,000
Flama Total Indicated	1,100,000	1.48	50,000	0.22	10,000	0.11	1,000	0.005	50
Flama Total Inferred	2,100,000	1.19	80,000	0.16	10,000	0.08	2,000	0.003	70
Flama Total Mineral Resource	3,200,000	1.29	130,000	0.18	20,000	0.09	3,000	0.00	130
GEO-01 Main Zone Total Indicated	2,560,000	1.01	83,000	0.08	7,000	0.02	500	0.002	60
GEO-01 Main Zone Total Inferred	700,000	1.51	34,000	0.19	4,000	0.07	500	0.002	20
GEO-01 Main Zone Total Mineral Resource	3,300,000	1.11	120,000	0.10	11,000	0.03	1,000	0.00	70
Minella Total Indicated	300,000	0.95	11,000	0.26	9,000	0.16	2,000	0.005	500
Minella Total Inferred	390,000	1.09	17,000	0.36	14,000	0.21	4,000	0.004	800
Minella Total Mineral Resource	690,000	1.03	29,000	0.31	23,000	0.19	7,000	0.00	1,300
Rizzo Total Mineral Resource (Inferred)	501,000	0.76	12,000	0.53	9,000	0.28	1,000	0.01	50
GEO-01 Central Total Indicated	26,000	0.63	500	0.16	140	0.02	10	0.000	-
GEO-01 Central Total Inferred	87,000	0.86	2,000	0.19	530	0.08	100	0.003	3
GEO-01 Central Total Mineral Resource	113,000	0.81	3,000	0.18	700	0.07	100	0.00	3
GEO-01 South Total Mineral Resource (Inferred)	138,000	1.08	5,000	0.12	500	0.06	100	0.01	10
GEO-01 Area Total Indicated Resource	4,000,000	1.12	144,500	0.23	30,000	0.09	3,500	0.005	610
GEO-01 Area Total Inferred Resource	3,900,000	1.20	150,000	0.32	40,000	0.20	7,700	0.005	953
GEO-01 Area Total Mineral Resource	7,900,000	1.16	294,500	0.28	70,000	0.14	11,200	0.005	1,560
Sundown Total Indicated Resource	550,000	1.31	23,000	0.50	9,000	0.25	1,400	0.04	200
Sundown Total Inferred Resource	540,000	1.68	29,000	0.18	3,000	0.11	600	0.05	260
Sundown Total Mineral Resource	1,100,000	1.49	53,000	0.34	12,000	0.18	2,000	0.04	500
Minyari South Total Indicated Resource	200,000	2.93	19,000	0.54	3,500	0.28	600	0.03	50
Minyari South Total Inferred Resource	650,000	1.24	26,000	0.23	5,000	0.10	700	0.02	120
Minyari South Total Mineral Resource	860,000	1.64	45,000	0.30	8,000	0.14	1,200	0.02	170
Minyari North Total Mineral Resource (Inferred)	675,000	0.95	21,000	0.14	3,000	0.06	400	0.01	70
WACA West Total Mineral Resource (Inferred)	314,000	1.26	13,000	0.86	9,000	0.06	200	0.00	5
MINYARI DOME TOTAL INDICATED MINERAL RESOURCE	42,000,000	1.61	2,200,000	0.49	656,000	0.19	77,000	0.03	12,000
MINYARI DOME TOTAL INFERRED MINERAL RESOURCE	9,000,000	1.25	375,000	0.24	73,000	0.11	10,000	0.01	1,000
MINYARI DOME TOTAL MINERAL RESOURCE	51,000,000	1.54	2,540,000	0.44	729,000	0.17	87,000	0.03	13,000
SATELLITE DEPOSIT MINERAL RESOURCES ⁴									
Tims Dome Total Mineral Resource (Inferred)	5,000,000	0.70	110,000						
Chicken Ranch Total Mineral Resource (Inferred)	1,200,000	1.23	49,000						
RPS Total Mineral Resource (Inferred)	11,000,000	0.64	230,000	0.42	150,000	0.03	3,600		
MINYARI PROJECT TOTAL INDICATED MINERAL RESOURCE	42,000,000	1.61	2,200,000	0.49	656,000	0.19	77,000	0.03	12,000
MINYARI PROJECT TOTAL INFERRED MINERAL RESOURCE	26,200,000	0.89	800,000	0.26	224,000	0.05	14,000	0.01	1,000
MINYARI PROJECT GRAND TOTAL MRE INDICATED + INFERRED	68,000,000	1.33	2,900,000	0.40	880,000	0.13	91,000	0.03	13,000

Notes for the Minyari Project MRE Table:

1. Rounding of numbers may cause apparent discrepancies in totals.
2. For full details of the Minyari Project Mineral Resources Estimate, please refer to ASX announcements dated: 2 April 2026 entitled "Minyari Project Resource Grows to 3.6 Moz Gold Equivalent", 18 December 2025 entitled "Minyari Development Resource Grows to 3.3Moz Gold Equivalent", 21 May 2025 entitled "Minyari Project Resource Grows by 100 koz to 2.5 Moz of Gold", and 17 September 2024 entitled "100% Owned Minyari Dome Project Grows by 573,000 Oz of Gold".
3. The Minyari Dome MRE has been reported within optimised open pit shells at a cut-off grade of 0.3 g/t gold and within optimised (MSO) underground stopes with a Net Smelter Return (NSR) $\geq$ A\$110, using metal prices of US\$5,000/oz gold, US\$65 silver and AUD/USD of 0.65 and cost and revenue assumptions.
4. The satellite deposits Tim's Dome, Chicken Ranch and RPS MREs have been reported at cut-off grades above 0.3 g/t gold which assumes open pit mining.
5. The Minyari Project and its Mineral Resource are 100% owned by Antipa Minerals Ltd.

Gold Metal Equivalent Information - Minyari Project Mineral Resource Gold Equivalent Calculation:

A gold equivalent grade (**Aueq**) has been calculated from individual gold, copper, silver, and cobalt grades. This equivalent grade has been calculated and declared in accordance with Clause 50 of the JORC Code (2012) that it is the Company's opinion that all metals included in this metal equivalent calculation have reasonable potential to be recovered and sold, using the following parameters:

- The metal prices used for the calculation are as follows:
 - US\$ 2,030 /oz gold
 - US\$ 4.06 / lb copper
 - US\$ 24.50 /oz silver
 - US\$ 49,701 per tonne cobalt
- An exchange rate (A\$:US\$) of 0.700 was assumed.
- Metallurgical recoveries for by-product metals, based upon Antipa test-work in 2017 and 2018, are assumed as follows:
 - Gold = 88.0% Copper = 85.0%, Silver = 85%, Cobalt = 68%
- The gold equivalent formula, based upon the above commodity prices, exchange rate and recoveries, is thus:
 - **Aueq** = (Au g/t) + (Ag g/t * 0.012) + (Cu % * 1.32) + (Co % * 5.88)

ANTIPA MINERALS LTD - MINYARI PROJECT

CY2026 Discovery and Mineral Resource Growth Drill Programmes – Reverse Circulation, Diamond Core and Air Core

JORC Code 2012 Edition:

Table 1 - Section 1 Sampling Techniques and Data (Criteria in this section shall apply to all succeeding sections)

Criteria	JORC Code Explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where ‘industry standard’ work has been done this would be relatively simple (e.g. ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information.</i>	CY2026 various prospects and targets have been sampled for growth and discovery purposes. Reverse Circulation (RC) Sampling - CY2026 to date 116 RC holes for a total of 25,214m have been completed, with an average hole depth of 217m (including three abandoned RC holes for 258m). - Assay results have been received for 92 CY2026 RC holes. - RC Sampling was conducted under Antipa protocols and QAQC procedures as per industry best practice. - All RC samples were drilled using a 140mm diameter face sampling hammer with samples taken on one metre intervals. - Individual one metre (2 to 3 kg) samples or two to four metre composite samples (2 to 3 kg) were submitted for laboratory analysis. - If warranted and based on anomalous laboratory assay results of (2 to 4m) composite samples, additional individual one metre samples may also be collected and submitted for laboratory analysis. Diamond Core Drill Sampling - CY2026 to date five diamond core hole for a total of 2,790m has been completed, with an average hole depth of 558.0m. - Assay results have been received for two CY2026 diamond core RC holes. - Diamond core sampling is conducted under Antipa protocols and QAQC procedures as per industry best practice.

Criteria	JORC Code Explanation	Commentary
		- All drill core is geologically, structurally, and geotechnically logged and photographed prior to cutting. - Quarter core and half core samples are taken from diamond core holes using an automatic core saw. - The drill core is sampled nominally as one metre samples with adjustments for major geological boundaries, with sample lengths ranging between 0.3m and 1.2m. - Drill core samples are submitted to the lab for assay. Air Core Sampling - CY2026 to date a total of 208 air core drill holes have been completed on the Minyari Project for a total of 14,244m, with an average hole depth of 68m. - Assay results have been received for 187 CY2026 air core holes. - Locations and orientations for these air core drill holes are tabulated in the body of this report. - One metre samples were collected from a cyclone into a plastic bucket and then laid out on the ground in rows of 15. - Air core sample piles representing 1m intervals were spear sampled to accumulate 4m composite samples for analysis, with a total of 2 to 3 kg collected into pre-numbered calico bags. - The final metre of each hole was spear sampled to collect a total of 2 to 3 kg of cuttings into a pre-numbered calico bag. - All samples are pulverised at the laboratory to produce material for assay.
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	RC Drilling - RC drill holes are completed with a Schramm Epiroc 685 drill rig equipped with a 1,350cfm/500psi compressor and air truck with a 2,500cfm/1,000psi booster compressor owned and operated by Topdrill Pty Ltd. - All RC drill holes are completed using 140mm RC face sampling hammer drill bit from surface to total drill hole

Criteria	JORC Code Explanation	Commentary
		depths of between 66 to 360 metres. Diamond Core Drilling - Diamond core drill holes are completed with a Boart Longyear LF160T drill rig owned and operated by Hagstrom Drilling Pty Ltd. - Diamond core drill holes are completed with standard tube with a PQ diameter equipment at the start of hole to a designated depth depending on ground conditions and/or drill hole requirements. This is followed by HQ to a designated depth, then NQ to the end of hole. - Diamond core drill holes have been completed to depths of between 500 to 860 metres. - All diamond core was orientated using a north-seeking gyro electronic orientation tool. - All diamond core drill holes for geotechnical purposes used triple tube barrels. Air Core Drilling - Air core drill holes are completed with a Mantis 300 drill rig equipped with a 600cfm/200psi compressor owned and operated by Wallis Drilling Pty Ltd. - All air core drill holes are completed using an 85mm air core blade bit from surface to total drill hole depths of between 14 to 153 metres.
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	RC and Air Core - RC and air core sample recovery was recorded via visual estimation of sample volume, typically ranging from 90% to 100%, with only very occasional samples with less than 70% recovery. - RC and air core sample recovery was maximized by endeavoring to maintain dry drilling conditions as much as practicable; the majority of RC samples were dry. - All RC samples were split using the drill rig's mounted cone splitter. Adjustments were made to ensure representative 2 to 3 kg sample were collected.

Criteria	JORC Code Explanation	Commentary
		- Relationships between recovery and grade are not evident and are not expected given sample recovery is generally excellent and consistently high. Diamond Core - Core recovery is recorded as a percentage. Overall core recoveries averaged over 99.5% and there are no core loss issues or significant sample recovery problems except for infrequent, very localised/limited regions. - Drillers used appropriate measures to maximise diamond core sample recovery. - There is no relationship between sample recovery and/or mineralisation grade as the diamond core recovery was consistently high.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i>	- Geological logging of all RC, air core and diamond core intervals was carried out recording colour, weathering, lithology, mineralogy, alteration, veining, and sulphides to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Logging includes both qualitative and quantitative components. - Logging was completed for 100% of all drill holes. - All RC, air core and diamond core intervals were measured for magnetic susceptibility using a handheld Magnetic Susceptibility meter. - A total of 20,806 metres of RC drill chip samples from one metre intervals have been logged. - A total of 1,898 metres of diamond core have been logged. - A total of 14,244 metres of air core drill chip samples from one metre intervals have been logged.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	RC Samples - RC samples for all drill holes were drilled using a 140mm diameter face sampling hammer. - Samples were collected as 1m splits from the rig mounted cone splitter. - Field duplicate samples were collected for all RC drill holes.

Criteria	JORC Code Explanation	Commentary
	- Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	- The majority of the samples were dry. - Individual one metre (2 to 3 kg) samples or two to four metre composite samples (2 to 3 kg) were submitted for laboratory analysis. Diamond Core Samples - Core was either quarter core sampled in PQ diameter core, or half core sampled in HQ and NQ diameter core at a nominal 1.0m sample interval within unmineralised zones and on 0.3 to 1.2m intervals within the mineralised zones. Air Core Samples - One metre samples were collected from a cyclone into a plastic bucket and then laid out on the ground in rows of 15. - Compositing air core samples of between 2 to 4 m was undertaken via combining 'Spear' samples of the intervals to generate a 2 kg (average) sample. Sample Preparation - Each sample was pulverised at the laboratory to produce material for assay. - Sample preparation was carried out at ALS using industry standard crush and/or pulverizing techniques. Preparation includes over drying and pulverizing of the entire sample using Essa LM5 grinding mill to a grid size of 85% passing 75 µm. - The sample sizes are considered appropriate for the style of mineralisation across the Minyari Project.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	- All drill samples were submitted to ALS in Perth for preparation and analysis. - All samples were dried, crushed, pulverised, and split to produce a sub-sample for laboratory analysis.

Criteria	JORC Code Explanation	Commentary
	<i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	RC and Diamond Core Sample Analysis - Each sub-sample is digested and refluxed with hydrofluoric, nitric, hydrochloric and perchloric acids ("four acid digest"). This digest is considered to approach a total dissolution for most minerals. Analytical analysis is performed using a either ICP-AES or ICP-MS. Resource Definition suite (ICP-AES): Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cu, Fe, K, La, Li, Mg, Mn, Mo, Na, Ni, P, Pb, S, Sb, Sc, Sn, Sr, Te, Ti, Tl, V, W and Zn. Targeted exploration suite (ICP-MS): Al, As, B, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, Hg, In, K, La, Li, Mg, M, Mo, Na, Nb, Ni, P, Pb, Pd, Pt, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y, Zn and Zr. - A lead collection fire assay on a 50 gm sample with Atomic Absorption Spectroscopy was undertaken to determine gold content with a detection limit of 0.01 ppm. Air Core Sample Analysis - Each composite sub-sample was digested in a mixture of 3-parts hydrochloric acid and 1-part nitric acid ('aqua regia digest'), suitable for weathered air core samples. Aqua regia can digest many different mineral types including most oxides, sulphides and carbonates but will not totally digest refractory or silicate minerals. Analytical methods used were both ICP-AES and ICP-MS (Au, Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Hf, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Pd, Pt, Rb, Re, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y, Zn and Zr). - End of hole sub-samples were analysed using a Multi-Element Ultra Trace method combining a four-acid digestion with ICP-MS instrumentation. A four-acid digest is performed on 0.25g of sample to quantitatively dissolve most geological materials. Analytical analysis performed with a combination of ICP-AES and ICP-MS. Four acid digestions quantitatively dissolve nearly all minerals (Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cu, Fe, K, La, Li, Mg, Mn, Mo, Na, Ni, P, Pb, S, Sb, Sc, Sn, Sr, Te, Ti, Tl, V, W and Zn).

Criteria	JORC Code Explanation	Commentary
		- A lead collection fire assay on a 50 gm sample with an ICP-AES finish was undertaken on end of hole samples to determine gold content with a detection limit of 0.001 ppm. RC, Diamond Core and Air Core Samples - Additional ore-grade analysis was performed as required for other elements reporting out of range. - Field QC procedures involve the use of commercial certified reference material (CRM) for assay standards and blanks. Standards are inserted every 25 samples. The grade of the inserted standard is not revealed to the laboratory. - Field duplicates/repeat QC samples was utilised during the drill programmes with nominally 1 in 30 duplicate samples submitted for laboratory assay for each drill hole, with additional duplicate samples submitted in mineralized zones. - Inter laboratory cross-checks analysis programmes have not been conducted at this stage. - In addition to Antipa supplied CRM's, ALS includes in each sample batch assayed certified reference materials, blanks and up to 10% replicates. - If necessary, anomalous results are redigested to confirm results.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i>	- Significant drill intersections have been visually verified by multiple members of the Antipa geology team, including the Exploration Manager. - All logging is entered directly into a notebook computer using the Antipa Proprietary Logging System which is based on Microsoft Excel. The logging system uses standard look-up tables that does not allow invalid logging codes to be entered. Further data validation is carried out during upload to Antipa's master SQL database. - No adjustments or calibrations have been made to any laboratory assay data collected.

Criteria	JORC Code Explanation	Commentary
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	- km = kilometre; m = metre; mm = millimetre. - When possible, drill hole collar locations have been recorded using a differential GPS with a stated accuracy of ± 0.5 metres. Otherwise drill hole collar locations are recorded using a standard handheld GPS which has a stated accuracy of ± 5 to 10 metres. - The drilling co-ordinates are in GDA2020 MGA Zone 51 co-ordinates. - The Company has adopted and referenced one specific local grid across the Minyari Dome region ("Minyari" Local Grid) which is defined below. References in the text and the Minyari deposit diagrams are all in this specific Minyari Local Grid. - Minyari Local Grid 2-Point Transformation Data: - Minyari Local Grid 47,400m east is 421,462.154m east in GDA94 / MGA Zone 51; - Minyari Local Grid 99,000m north is 7,632,467.588 m north in GDA94 / MGA Zone 51; - Minyari Local Grid 47,400m east is 414,078.609m east in GDA94 / MGA Zone 51; - Minyari Local Grid 113,000m north is 7,644,356.108m north in GDA94 / MGA Zone 51; - Minyari Local Grid North (360°) is equal to 328.2° in GDA94 / MGA Zone 51; and - Minyari Local Grid elevation is equal to GDA2020 / MGA Zone 51. - The Company has adopted and referenced one specific local grid across the Tim's Dome region ("Tim's Dome" Local Grid) which is defined below. References in the text and the Tim's Dome deposit diagrams are sometimes referred to in this specific Tim's Dome Local Grid. - Tim's Dome Local Grid 2-Point Transformation Data: - Tim's Dome Local Grid 6,475m east and 29,100m north is 404,437m east and 7,608,101m north in GDA94 / MGA Zone 51; - Tim's Dome Local Grid 6,475m east and 27,450m north is 404,437m east and 7,606,671m north in GDA94 / MGA Zone 51;

Criteria	JORC Code Explanation	Commentary
		- Tim's Dome Local Grid North (360°) is equal to 314° in GDA94 / MGA Zone 51; and - Tim's Dome Local Grid elevation is equal to GDA2020 / MGA Zone 51. - A 1,451 km² region of the Minyari Project's topographic surface has been compiled using Light Detection and Ranging (LiDAR) November 2025 survey data. - Surveys were completed upon hole completion using a Reflex Gyro downhole survey instrument. - Surveys were checked by the supervising Geologist for consistency. If required, readings were re-surveyed or smoothed in the database if unreliable azimuth readings were apparent. - Survey details included drill hole dip ($\pm 0.25^\circ$ accuracy) and drill hole azimuth ($\pm 0.35^\circ$ accuracy), Total Magnetic field and temperature.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	- Targeted exploration drill hole collar locations are typically drilled on a range of hole spacings testing geophysical targets (e.g. magnetic, induced polarisation, electromagnetic, gravity) and/or air core targets and/or surface sampling (soil) geochemical anomalies. - Mineral Resource definition and/or extension drill holes are typically drilled on a specified drill hole spacing to increase confidence appropriate to Mineral Resource classification. Across the Minyari Project deposits, these generally occur as either 25 metre or 50 metre grids. - The drill hole spacing for a number of deposits at Minyari Dome (e.g. Minyari, Minyari South, WACA and GEO-01 Area) and satellite deposits (e.g. Tim's Dome, Chicken Ranch and RPS) the drill hole spacing of the RC $\pm$ diamond core drilling is sufficient to establish the geological and grade continuity suitable for Mineral Resource estimation. - The current drill hole spacing at a number of prospects and exploration targets is not sufficient for Mineral Resource estimation.

Criteria	JORC Code Explanation	Commentary
		Reported intersections were aggregated using downhole length weighting of consecutive drill hole sample laboratory assay results.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	- The location and orientation of the Minyari Project drilling is appropriate given the strike, dip, and morphology of the mineralisation. - No consistent and/or material sampling bias resulting from a structural orientation has been identified across the Minyari Project at this stage; however, folding, and multiple vein directions have been recorded via surface mapping and (orientated) diamond core and Televiwer surveyed RC drill holes.
Sample security	<i>The measures taken to ensure sample security.</i>	- Chain of sample custody is managed by Antipa to ensure appropriate levels of sample security. - Samples are stored on site and delivered by Antipa or their representatives to Port Hedland and subsequently by RGR Transport Pty Ltd from Port Hedland to the laboratory in Perth.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	- Sampling techniques and procedures are regularly reviewed internally, as is all data. - Consultants Snowden, during completion of the 2013 Calibre Mineral Resource estimate, undertook a desktop review of the Company's sampling techniques and data management and found them to be consistent with industry standards.

Table 1 - Section 2 – Reporting of Exploration Results (Criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	- Drill holes completed to date in the various CY2026 drilling programmes are drilled on the following tenements: - E45/2526, E45/3918, E45/3919, E45/4565, E45/4618, E45/4867, E45/5312, E45/5458 and E45/5462. - Antipa Minerals Ltd's interests in the Exploration Licences detailed above are not subject to any third-party Farm-in or Joint Venture agreements. - A 1.5% net smelter royalty is payable to Newcrest Operations Ltd (a wholly owned subsidiary of Greatland Resources Ltd) on the sale of all metals on Exploration Licences E45/4812, E45/5079, E45/5147, and E45/5148. - A 1.0% net smelter royalty is payable to International Royalty Corporation on the sale of all metals (excluding uranium) on Exploration Licences E45/3918 and E45/3919. - A Split Commodity Agreement exists with Paladin Energy Ltd's wholly owned subsidiary North Gascoyne Mining Pty Ltd whereby it owns the rights to uranium on Exploration Licences E45/3918 and E45/3919. - The Minyari, WACA, GEO-01 Area, WACA West, Minyari South, Minyari North and Sundown Mineral Resources are located wholly within Exploration Licence E45/3919. - The Rizzo and GEO-01 South Mineral Resources are located on tenements E45/3919 and E45/5458. - The Tim's Dome Mineral Resource is located within Exploration Licences E45/4565 and E45/2526. - The Chicken Ranch Mineral Resource is located within Exploration license E45/4867. - These tenements are contained completely within land where the Martu People have been determined to hold Native Title rights. To the Company's knowledge no historical or environmentally sensitive sites have been identified in the area being actively explored and reported herein. - The tenements are in good standing, and no known

Criteria	JORC Code explanation	Commentary
		impediments exist.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	- The Minyari and WACA deposits were greenfield discoveries by the Western Mining Corporation Ltd during the early 1980's. - Exploration of the Minyari Dome region has involved the following companies: - Western Mining Corporation Ltd (1980 to 1983); - Newmont Holdings Pty Ltd (1984 to 1990); - MIM Exploration Pty Ltd (1990 to 1991); - Newcrest Mining Limited (1991 to 2015); and - Antipa Minerals Ltd (2016 onwards). - Exploration across various regions within the remainder of the Minyari Project has been conducted by the following companies: - Carr Boyd Minerals Ltd (1973 to 1975); - Geopeko Limited (JV with Carr Boyd) (1978); - Marathon Petroleum Australia Limited (1979); - Western Mining Corporation Limited (WMC) (1980); - Duval Mining (Australia) Limited (Carr Boyd JV with Picon Exploration Pty Ltd) (1984 to 1986); - Newmont (1984 to 1989); - Mount Burgess Gold Mining Company N.L. (1989 to 2001); - Carpentaria - MIM JV with Mount Burgess (1990 to 1996); - BHP Australia (1991 to 1998); - Mount Isa Mines Exploration (1993 to 1998); - Normandy - JV with Mount Burgess (1998 to 2000); - MIM Exploration Pty Ltd (1990 to 1993); - Newcrest (1987 to 2015); - Quantum Resources Limited (2012 to 2016); - IGO Ltd - former Farm-In JV with Antipa (July 2020 to April 2025); - Newcrest Mining Ltd – Former Farm-In JV with Antipa (March 2020 to Nov 2023); and - Newmont Corporation - Former Farm-In JV with

Criteria	JORC Code explanation	Commentary
		Antipa (Nov 2023 – May 2025).
<i>Geology</i>	<i>Deposit type, geological setting and style of mineralisation.</i>	- The geological setting is Paterson Province Neoproterozoic aged meta-sediment and meta-mafic hosted hydrothermal shear, fault and strata/contact controlled precious and/or base metal mineralisation which is typically sulphide bearing. - The Paterson Province is a low grade metamorphic terrane but local hydrothermal alteration and/or contact metamorphic mineral assemblages and styles are indicative of a moderate to high-temperature local environment. - The Neoproterozoic precious and base metal mineralisation in the region is interpreted to be intrusion related. Typical mineralisation styles include reef, vein, stockwork, breccia and skarns. - The gold-copper-silver mineralisation at Minyari Dome is interpreted to be reduced intrusion related, with dominant mineralisation styles being quartz±amphibole±pyroxene ±calcite-sulphide (Po>Cp>Py) vein/stockwork, breccia with associated albite dominated hydrothermal alteration. - The gold±copper-silver-lead mineralisation at Tim's Dome is interpreted to be intrusion related, with dominant mineralisation styles being almost exclusively meta-sediment hosted quartz±calcite-sulphide (Py>Po>Cp) bedding parallel reefs and vein/stockwork with associated albite±sericite dominated hydrothermal alteration.
<i>Drill hole Information</i>	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <i>easting and northing of the drill hole collar;</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar;</i> <i>dip and azimuth of the hole;</i> <i>down hole length and interception depth;</i> <i>hole length; and</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does</i>	- Summaries of all information material to the understanding of these exploration results can be found in the body of this report. - A summary of all available information material to the understanding of the Minyari Project exploration results can also be found in previous Western Australian (WA) Department of Mines, Petroleum and Exploration (DMPE) publicly available reports. - All the various technical Minyari Project exploration reports are publicly accessible via the DMPE online WAMEX system. - The specific WAMEX and other reports related to the

Criteria	JORC Code explanation	Commentary
	<i>not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	exploration information on the subject of this public disclosure have been referenced in previous public reports.
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	- Drill hole intersections consisting of more than one sample were aggregated using downhole length weighting of consecutive drill hole sample laboratory assay results. - No top-cuts to gold, copper, silver, or cobalt have been applied (unless specified otherwise). - A nominal 0.1 g/t gold, 300 ppm copper (Discovery focused) or 400 ppm copper (Pre-feasibility Study (PFS) or Mineral Resource growth focused), 0.7 g/t silver and 400 ppm cobalt lower cut-off grades have been applied during data aggregation of RC and diamond core results. - For Air Core, a nominal 30 ppb gold, 200 ppm copper, 0.5 g/t silver, 100 ppm cobalt lower cut-off grades have been applied during data aggregation methods. - Higher grade intervals of mineralisation internal to broader zones of mineralisation are reported as included intervals. - Metal equivalence has not been used in the reporting of these drill intersections.
Relationship between mineralisation widths and intercept lengths	<i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i>	- At this stage, the reported intersection lengths are down hole in nature and the true width, which will be dependent on the local mineralisation geometry/setting, is not always known. - Mineralisation at the various deposits and greenfield prospects across the Minyari Project consist of meta-sediment hosted plus lesser mafic and felsic intrusion hosted intrusion related hydrothermal alteration, breccia, vein, stockwork and reef style gold-copper-silver-cobalt mineralisation. - For the Minyari Dome and Tim's Dome deposits, drill holes are designed to intersect the mineralisation orthogonally based on current mineralisation interpretations. Therefore, the reported downhole mineralisation intercepts for a number of these specific drill holes are considered to more reliably represent approximate true widths. - For greenfields targets/prospects based on limited drilling information, mineralisation is generally interpreted to be

Criteria	JORC Code explanation	Commentary
		steeply dipping and striking between approximately 320° to 350°, with pre-mineralisation folding and cross cutting (mafic) intrusives resulting in local variations in host rock and mineralisation geometries.
<i>Diagrams</i>	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	- Appropriate plans and sections (cross-section/s and long section/s) (with scales) for any significant/material discovery, Mineral Resource extension or Mineral Resource definition results being reported and tabulations of intercepts are provided in the body of this report or have previously been publicly reported or can sometimes be found in WA DMPE WAMEX publicly available reports. - Cross-sections are not provided for any drill hole/s which are not considered significant/material in relation to discoveries, Mineral Resource definition/extension, and/or where all analytical data is not currently available. - All notable drill intersections are included in Table 1. - Antipa Minerals Ltd publicly disclosed reports provide maps and sections (cross sections and long section/s) (with scales) and tabulations of intercepts generated by Antipa since 2011; these reports are all available to view on www.antipaminerals.com.au and www.asx.com.au, and can sometimes be found in WA DMPE WAMEX publicly available reports.
<i>Balanced reporting</i>	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All significant results are reported or can sometimes be found in WA DMPE WAMEX publicly available reports.
<i>Other substantive exploration data</i>	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	- All meaningful and material information has been included in the body of the text or can sometimes be found in WA DMPE WAMEX publicly available reports. - The details of the Minyari Dome region historic Induced Polarisation (IP) survey, including IP Chargeability and resistivity anomalies, can be found in WA DMPE publicly available WAMEX reports A81227 (2008), A86106 (2009) and A89687 (2010). - The details of the Company's reprocessing, review, and

Criteria	JORC Code explanation	Commentary
		modelling of the Minyari Dome region historic Induced Polarisation survey, including IP Chargeability and resistivity anomalies, can be found in the Company's ASX report titled "<i>Minyari Reprocessed IP Survey Results</i>" created on 5 July 2016. • Zones of mineralisation and associated waste material have not been measured for their bulk density; however, Specific Gravity ("Density") measurements continue to be taken from diamond drill core. • Multi element laboratory assaying was conducted variously for a suite of potentially deleterious elements including arsenic, sulfur, lead, zinc, and magnesium. • Downhole "logging" of a selection of Minyari deposit RC drill holes was undertaken as part of the 2016 and 2021 drill programs using an OBI40 Optical Televiwer which generated an oriented 360-degree image of the drill hole wall via a CCD camera recorded digital image. The OBI40 system utilised also included a North Seeking Gyro-scope to measure drill hole location/deviation, and the downhole survey also measured rock density, magnetic susceptibility, natural gamma and included a borehole caliper device for measuring drill hole diameter. The combined dataset collected via the OBI40 Optical Televiwer downhole survey data has multiple geological and geotechnical uses, including but not limited to the detection and determination of in-situ lithological, structural and mineralisation feature orientations (i.e. dip and strike), determination and orientation of fracture frequency, general ground conditions/stability, oxidation conditions, ground-water table, and clarity, etc. • Information on structure type, dip, dip direction, alpha angle, beta angle, gamma angle, texture and fill material derived mainly from diamond drill core is stored in the Company's technical SQL database. • No information on structure type, dip, dip direction, alpha angle, beta angle, gamma angle, texture and fill material were obtained from the WAMEX reports.

Criteria	JORC Code explanation	Commentary
		- Metallurgical test-work results for the Minyari, WACA and GEO-01 Main Zone gold-copper-silver-cobalt deposits obtained for previous Minyari Dome Scoping Studies and/or the ongoing PFS are available to view on www.antipaminerals.com.au and www.asx.com.au: - Refer to Antipa Minerals ASX release dated 13 June 2017 “Minyari Dome Positive Metallurgical Test Work Results”; - Refer to Antipa Minerals ASX release dated 26 August 2018 “Minyari Dome Excellent Metallurgical Test-work Results”; - Refer to Antipa Minerals ASX release dated 16 December 2025 “Minyari Development Project - PFS Workstreams Update”; and - Refer to Antipa Minerals ASX release dated 7 July 2026 “PFS Test-work Confirms a Standalone Conventional Gold-Copper Processing Pathway for Minyari”. - The 2017 and 2018 metallurgical test-work was completed at the Bureau Veritas Minerals Pty Ltd laboratories in Perth, Western Australia under the management of metallurgical consultants Strategic Metallurgy Pty Ltd in conjunction with Bureau Veritas metallurgists. - The Minyari Dome PFS metallurgical test-work is being completed by Strategic Metallurgy Pty Ltd under the supervision of Antipa’s Study Manager metallurgist. - The 2017 metallurgical test-work demonstrated excellent gold recoveries for both oxide and primary mineralisation from the Minyari and WACA deposits, with the 2018 metallurgical test-work confirming the potential for the Minyari and WACA to produce copper-gold concentrate and cobalt-gold concentrate product with extremely favourable results. Optimisation of metallurgical performance is expected via additional test-work. - Metallurgical test-work for the GEO-01 area deposit mineralisation commenced in August 2024 and is ongoing as part of the Minyari Dome PFS. - The GEO-01 Main Zone metallurgical test-work has

Criteria	JORC Code explanation	Commentary
		demonstrated excellent gold recovery, identical to the Minyari and WACA test-work results and has shown substantially lower cyanide consumption for the GEO-01 primary mineralisation compared to these deposits. - In addition, the following information in relation to metallurgy was obtained from WA DMPE WAMEX reports: - Newmont Holdings Pty Ltd collected two bulk (8 tonnes each) metallurgical samples of oxide mineralisation in 1987 (i.e. WAMEX 1987 report A24464) from a 120m long costean across the Minyari deposit. The bulk samples were 8 tonnes grading 1.5 g/t gold and 8 tonnes grading 3.57 g/t gold from below shallow cover in the costean. However, it would appear the Newmont metallurgical test-work for these two bulk samples was never undertaken/competed as no results were subsequently reported to the WA DMPE. - Newmont Holdings Pty Ltd also collected drill hole metallurgical samples for Minyari deposit oxide and primary mineralisation (i.e. WAMEX 1986 report A19770); however, subsequent reporting of any results to the WA DMPE could not be located suggesting that the metallurgical test-work was never undertaken/competed. - Newcrest Mining Ltd describe the Minyari deposit gold-copper mineralisation as being typical of the Telfer gold-copper mineralisation. In 2004 and 2005 (WAMEX reports A71875 and A74417) Newcrest commenced metallurgical studies for the Telfer Mine and due to the similarities with the Minyari mineralisation a portion of this Telfer metallurgical test-work expenditure was apportioned to the then Newcrest Minyari tenements. Whilst Telfer metallurgical results are not publicly available, the Telfer Mining operation (including ore processing facility) was materially expanded in the mid-2000's and continues to operate with viable metallurgical recoveries (for both oxide and primary mineralisation).

Criteria	JORC Code explanation	Commentary
		- An October 2024 Scoping Study Update for Minyari Dome provided a positive economic solution for the project with the following outcomes: - Life of Mine (LOM) of 10+ years; 30Mt mining inventory grading 1.5 g/t Au for 1.5Moz gold and 463koz silver; and - Processing CIL Plant with a capacity of 3Mtpa. - Full details of Scoping Study outcomes are available to view at www.antipaminerals.com.au: - Refer to Antipa Minerals ASX release dated 24 October 2024 "Minyari Dome Scoping Study Update Confirms Development Potential".
<i>Further work</i>	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	- Additional potential exploration activities are outlined in the body of this report. - The Minyari Dome PFS remains in progress. - Appropriate plans and sections (cross-sections and long section/s) (with scales) and tabulations of intercepts are provided in the body of this report or have previously been publicly or previously reported by Antipa or can sometimes be found in WA DMPE WAMEX publicly available reports.