For personal use only

2 November 2026

Drilling Delivers Multiple Superb Intercepts at Orient East

Iltani Resources Limited (ASX: ILT, "Iltani" or "the Company") is pleased to report the latest assay results from the ongoing drilling program at its Orient Silver Zinc Indium Project in Northern Queensland, Australia's largest and highest grade known silver zinc indium project.

HIGHLIGHTS:

- **15 Orient East RC drill holes (ORR216, ORR221 to ORR228 & ORR234 to ORR239) have delivered multiple outstanding assay results**
  - **Thickest (106m) intercept of mineralisation intersected to date at Orient**
  - **Six intercepts of high-grade silver-lead-zinc-indium mineralisation >1,000 gm Ag (silver grade metres) & >1,000 gm Ag Eq. (silver equivalent grade metres)**
  - **Fifteen intercepts of high-grade silver-lead-zinc-indium mineralisation >1,000 gm Ag Eq. (silver equivalent grade metres)**
  - **Five intercepts of exceptional high-grade silver-lead-zinc-indium mineralisation with assays of 1m > 1,000 g/t Ag Eq.**
- **ORR221 intersected 106m of mineralisation - the thickest zone of mineralisation drilled to date at the Orient Silver Zinc Indium Project**
  - ORR221: **106m @ 143 g/t Ag Eq.** from 8m including a high-grade core of **22m @ 384 g/t Ag Eq.** from 52m inc. **4m @ 771 g/t Ag Eq.** from 70m inc. **1m @ 1,043 g/t Ag Eq. (462 g/t Ag, 15 g/t In, 12.4% Pb & 2.7% Zn)** from 70m and **6m @ 108 g/t Ag Eq.** from 122m, **12m @ 120 g/t Ag Eq.** from 153m and **13m @ 89 g/t Ag Eq.** from 170m
- **Multiple intercepts of high-grade silver-lead-zinc-indium mineralisation >1,000 gm Ag (silver grade metres) & >1,000 gm Ag Eq. (silver equivalent grade metres) including:**
  - ORR225: **35m @ 163 g/t Ag Eq.** from 65m inc. **4m @ 617 g/t Ag Eq.** from 82m inc. **1m @ 1,774 g/t Ag Eq. (726 g/t Ag, 65 g/t In, 17.7% Pb & 7.8% Zn)** from 83m
  - ORR227: **23m @ 151 g/t Ag Eq.** from 14m inc. **2m @ 354 g/t Ag Eq.** from 16m and **5m @ 394 g/t Ag Eq.** from 30m inc. **1m @ 803 g/t Ag Eq.** from 34m
  - ORR228: **28m @ 85 g/t Ag Eq.** from surface (0m)
  - ORR228: **32m @ 227 g/t Ag Eq.** from 40m inc. **10m @ 521 g/t Ag Eq.** from 60m inc. **1m @ 1,048 g/t Ag Eq. (329 g/t Ag, 5 g/t In, 7.0% Pb & 9.3% Zn)** from 63m
  - ORR239: **38m @ 92 g/t Ag Eq.** from 135m inc. **3m @ 182 g/t Ag Eq.** from 136m inc. **1m @ 404 g/t Ag Eq.** from 143m
- **Drilling continues to confirm the size and scale of the Orient Silver Zinc Indium Project with multiple thick high-grade intercepts demonstrating its open pit potential.**
- Iltani's initial 110-hole drill program Orient resource infill & extension program has been completed.
- The results will be used to update the Orient Mineral Resource for Orient West and Orient East, expected in Q4 2026, with the MRE result feeding into the Orient Scoping Study in 2027.
- Iltani is planning follow-up Link Zone drilling, to target and extend the mineralisation intersected. Drilling is planned to commence before the start of the wet season in 2026.

For personal use only

Material drilling results from the Orient East drilling include the following:

- ORR216 intersected **9m @ 160 g/t Ag Eq. (54 g/t Ag, 10 g/t In, 1.5% Pb & 1.0% Zn)** from 117m inc. **4m @ 277 g/t Ag Eq. (96 g/t Ag, 20 g/t In, 2.6% Pb & 1.6% Zn)** from 121m;
- ORR221 **106m @ 143 g/t Ag Eq. (47 g/t Ag, 5 g/t In, 1.1% Pb & 1.1% Zn)** from 8m inc. **22m @ 384 g/t Ag Eq. (122 g/t Ag, 14 g/t In, 3.0% Pb & 3.0% Zn)** from 52m inc. **7m @ 551 g/t Ag Eq. (156 g/t Ag, 23 g/t In, 3.7% Pb & 5.1% Zn)** from 56m inc. **1m @ 1,043 g/t Ag Eq. (462 g/t Ag, 15 g/t In, 12.4% Pb & 2.7% Zn)** from 70m and **6m @ 108 g/t Ag Eq. (30 g/t Ag, 1 g/t In, 0.7% Pb & 1.0% Zn)** from 122m, **12m @ 120 g/t Ag Eq. (41 g/t Ag, 3 g/t In, 0.9% Pb & 0.9% Zn)** from 153m and **13m @ 89 g/t Ag Eq. (29 g/t Ag, 3 g/t In, 0.6% Pb & 0.7% Zn)** from 170m
- ORR222 intersected **20m @ 61 g/t Ag Eq. (19 g/t Ag, 2 g/t In, 0.9% Pb & 0.2% Zn)** from surface (0m) plus **11m @ 77 g/t Ag Eq. (26 g/t Ag, 0.5% Pb & 0.7% Zn)** from 127m;
- ORR225 intersected **21m @ 127 g/t Ag Eq. (32 g/t Ag, 7 g/t In, 0.7% Pb & 1.4% Zn)** from 22m inc. **1m @ 1,150 g/t Ag Eq. (242 g/t Ag, 96 g/t In, 4.9% Pb & 13.7% Zn)** from 38m plus **35m @ 163 g/t Ag Eq. (59 g/t Ag, 7 g/t In, 1.3% Pb & 1.1% Zn)** from 65m inc. **4m @ 617 g/t Ag Eq. (245 g/t Ag, 26 g/t In, 5.8% Pb & 3.1% Zn)** from 82m inc. **1m @ 1,774 g/t Ag Eq. (726 g/t Ag, 65 g/t In, 17.7% Pb & 7.8% Zn)** from 83m plus **17m @ 83 g/t Ag Eq. (27 g/t Ag, 3 g/t In, 0.6% Pb & 0.7% Zn)** from 128m;
- ORR226 intersected **36m @ 65 g/t Ag Eq. (21 g/t Ag, 7 g/t In, 0.6% Pb & 0.4% Zn)** from 12m inc. **5m @ 159 g/t Ag Eq. (51 g/t Ag, 36 g/t In, 1.8% Pb & 0.6% Zn)** from 16m plus **10m @ 85 g/t Ag Eq. (51 g/t Ag, 2 g/t In, 0.9% Pb)** from 157m plus **17m @ 73 g/t Ag Eq. (32 g/t Ag, 1 g/t In, 0.5% Pb & 0.4% Zn)** from 244m;
- ORR227 intersected **23m @ 151 g/t Ag Eq. (51 g/t Ag, 3 g/t In, 1.3% Pb & 1.0% Zn)** from 14m inc. **2m @ 354 g/t Ag Eq. (124 g/t Ag, 8 g/t In, 3.1% Pb & 2.3% Zn)** from 16m and **5m @ 394 g/t Ag Eq. (145 g/t Ag, 7 g/t In, 3.7% Pb & 2.3% Zn)** from 30m inc. **1m @ 803 g/t Ag Eq. (325 g/t Ag, 19 g/t In, 8.2% Pb & 3.6% Zn)** from 34m;
- ORR228 intersected **28m @ 85 g/t Ag Eq. (36 g/t Ag, 0.3% Pb & 0.8% Zn)** from surface (0m) plus **32m @ 227 g/t Ag Eq. (75 g/t Ag, 1 g/t In, 1.7% Pb & 1.8% Zn)** from 40m inc. **10m @ 521 g/t Ag Eq. (174 g/t Ag, 2 g/t In, 4.0% Pb & 4.0% Zn)** from 60m inc. **1m @ 1,048 g/t Ag Eq. (329 g/t Ag, 5 g/t In, 7.0% Pb & 9.3% Zn)** from 63m;
- ORR234 intersected **8m @ 143 g/t Ag Eq. (38 g/t Ag, 15 g/t In, 1.1% Pb & 1.2% Zn)** from 99m inc. **1m @ 539 g/t Ag Eq. (124 g/t Ag, 91 g/t In, 3.8% Pb & 4.8% Zn)** from 103m;
- ORR236 intersected **3m @ 348 g/t Ag Eq. (116 g/t Ag, 14 g/t In, 3.5% Pb & 2.0% Zn)** from 106m plus **8m @ 171 g/t Ag Eq. (39 g/t Ag, 14 g/t In, 1.1% Pb & 1.7% Zn)** from 116m inc. **4m @ 277 g/t Ag Eq. (59 g/t Ag, 26 g/t In, 1.7% Pb & 2.9% Zn)** from 116m;
- ORR237 intersected **8m @ 143 g/t Ag Eq. (36 g/t Ag, 11 g/t In, 1.0% Pb & 1.3% Zn)** from 106m inc. **2m @ 247 g/t Ag Eq. (51 g/t Ag, 23 g/t In, 1.5% Pb & 2.7% Zn)** from 107m plus **4m @ 258 g/t Ag Eq. (86 g/t Ag, 14 g/t In, 2.7% Pb & 1.4% Zn)** from 133m inc. **2m @ 451 g/t Ag Eq. (156 g/t Ag, 24 g/t In, 4.8% Pb & 2.3% Zn)** from 133m;
- ORR238 intersected **9m @ 217 g/t Ag Eq. (63 g/t Ag, 25 g/t In, 1.8% Pb & 1.6% Zn)** from 158m inc. **3m @ 532 g/t Ag Eq. (157 g/t Ag, 69 g/t In, 4.4% Pb & 3.7% Zn)** from 162m inc. **1m @ 1,067 g/t Ag Eq. (291 g/t Ag, 159 g/t In, 8.4% Pb & 8.0% Zn)** from 163m; and
- ORR239 intersected **38m @ 92 g/t Ag Eq. (27 g/t Ag, 5 g/t In, 0.7% Pb & 0.8% Zn)** from 135m inc. **3m @ 182 g/t Ag Eq. (52 g/t Ag, 12 g/t In, 1.3% Pb & 1.5% Zn)** from 136m and **1m @ 404 g/t Ag Eq. (143 g/t Ag, 28 g/t In, 3.7% Pb & 2.3% Zn)** from 143m plus **16m @ 96 g/t Ag Eq. (29 g/t Ag, 2 g/t In, 0.7% Pb & 0.8% Zn)** from 181m plus **15m @ 62 g/t Ag Eq. (20 g/t Ag, 1 g/t In, 0.5% Pb & 0.4% Zn)** from 203m

For personal use only

Iltani Managing Director Donald Garner commented:

"We have delivered more outstanding results from the Orient East drilling. The grade and metal just keep on coming. To summarise, the fifteen RC drill holes we have released delivered the following:

- ***Thickest (106m) intercept of mineralisation intersected to date at Orient***
- ***Six intercepts of high-grade silver-lead-zinc-indium mineralisation >1,000 gm Ag (silver grade metres) & >1,000 gm Ag Eq. (silver equivalent grade metres)***
- ***Fifteen intercepts of high-grade silver-lead-zinc-indium mineralisation >1,000 gm Ag Eq. (silver equivalent grade metres)***
- ***Five intercepts of exceptional high-grade silver-lead-zinc-indium mineralisation with assays of 1m > 1,000 g/t Ag Eq.***

To highlight a couple of drill holes:

- ***ORR221 delivered the thickest intersection to date at Orient - 106m @ 143 g/t Ag Eq****. from 8m including* ***a high-grade core of 22m @ 384 g/t Ag Eq.*** *from 52m inc.* ***4m @ 771 g/t Ag Eq.*** *from 70m inc.* ***1m @ 1,043 g/t Ag Eq. (462 g/t Ag, 15 g/t In, 12.4% Pb & 2.7% Zn)*** *from 70m and* ***6m @ 108 g/t Ag Eq.*** *from 122m,* ***12m @ 120 g/t Ag Eq.*** *from 153m and* ***13m @ 89 g/t Ag Eq.*** *from 170m*

The 106m thick intersection in ORR221 demonstrates the potential for Orient East to be developed as a very attractive open pit.


- ***ORR239 – drilled at the southern edge of Orient East to close off the mineralisation*** *delivered* ***38m @ 92 g/t Ag Eq. (27 g/t Ag, 5 g/t In, 0.7% Pb & 0.8% Zn)*** *from 135m inc.* ***3m @ 182 g/t Ag Eq. (52 g/t Ag, 12 g/t In, 1.3% Pb & 1.5% Zn)*** *from 136m and* ***1m @ 404 g/t Ag Eq. (143 g/t Ag, 28 g/t In, 3.7% Pb & 2.3% Zn)*** *from 143m*
- *ORR239 also delivered a further* ***16m @ 96 g/t Ag Eq. (29 g/t Ag, 2 g/t In, 0.7% Pb & 0.8% Zn)*** *from 181m plus* ***15m @ 62 g/t Ag Eq. (20 g/t Ag, 1 g/t In, 0.5% Pb & 0.4% Zn)*** *from 203m*

We drilled ORR239 to close off the Orient East mineralisation, but instead of closing it off, ORR239 delivered multiple intersections of high-grade silver-lead-zinc-indium mineralisation. We now need to drill more holes in this area to better understand the potential to keep on extending the Orient East mineralisation."

1. Orient Silver Zinc Indium Project 2026 Drilling Program

Iltani has received assay results from a further 15 RC drill holes (ORR216, ORR221 to ORR228 & ORR234 to ORR239) completed at the Orient Silver Zinc Indium Project in Northern QLD (Figure 1).

Figure 1 Orient Silver Zinc Indium Project Infill & Extension Drilling Program

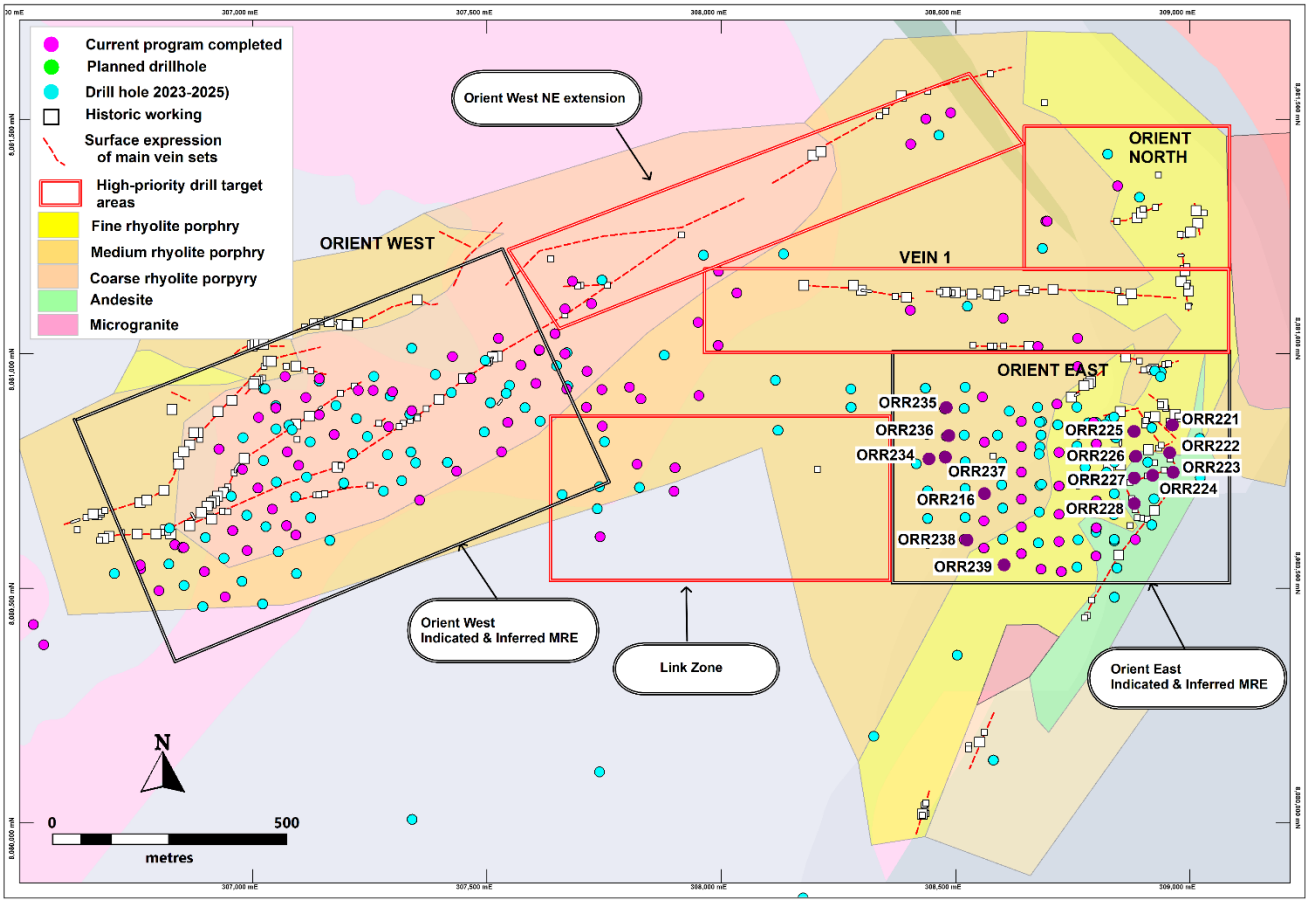

The initial 110-hole Orient Silver Zinc Indium Project Infill & Extension drilling program was completed in October 2026. The data generated will update the current Orient Silver Zinc Indium Project Mineral Resource, which is likely to be completed in Q4 2026. The updated Mineral Resource will provide greater confidence for the Orient Silver Zinc Indium Project Scoping Study planned to be completed in early 2027.

For personal use only

For personal use only

2. Orient East Drilling Results


Iltani is pleased to report the assay results from a further fifteen RC drill holes (ORR216, ORR221 to ORR228 & ORR234 to ORR239) completed at the Orient East as part of the recent resource infill and extension drilling program (refer to Table 1).

- **ORR221 delivered the thickest zone of mineralisation drilled to date at Orient, intersecting 106m of mineralisation from 8m depth.**
  - **106m @ 143 g/t Ag Eq.** from 8m including a high-grade core of **22m @ 384 g/t Ag Eq.** from 52m inc. **4m @ 771 g/t Ag Eq.** from 70m inc. **1m @ 1,043 g/t Ag Eq. (462 g/t Ag, 15 g/t In, 12.4% Pb & 2.7% Zn)** from 70m and **6m @ 108 g/t Ag Eq.** from 122m, **12m @ 120 g/t Ag Eq.** from 153m and **13m @ 89 g/t Ag Eq.** from 170m
- **Multiple drillholes delivered intersections of mineralisation >1,000 gm Ag (silver grade metres) & >1,000 gm Ag Eq. (silver equivalent grade metres) including:**
  - ORR225: **35m @ 163 g/t Ag Eq.** from 65m inc. **4m @ 617 g/t Ag Eq.** from 82m inc. **1m @ 1,774 g/t Ag Eq. (726 g/t Ag, 65 g/t In, 17.7% Pb & 7.8% Zn)** from 83m
  - ORR227: **23m @ 151 g/t Ag Eq.** from 14m inc. **2m @ 354 g/t Ag Eq.** from 16m and **5m @ 394 g/t Ag Eq.** from 30m inc. **1m @ 803 g/t Ag Eq.** from 34m
  - ORR228: **28m @ 85 g/t Ag Eq.** from surface (0m)
  - ORR228: **32m @ 227 g/t Ag Eq.** from 40m inc. **10m @ 521 g/t Ag Eq.** from 60m inc. **1m @ 1,048 g/t Ag Eq. (329 g/t Ag, 5 g/t In, 7.0% Pb & 9.3% Zn)** from 63m
  - ORR239: **38m @ 92 g/t Ag Eq.** from 135m inc. **3m @ 182 g/t Ag Eq.** from 136m and **1m @ 404 g/t Ag Eq.** from 143m
- **In addition, the drilling delivered 15 intercepts of high-grade silver-lead-zinc-indium mineralisation >1,000 gm Ag Eq. (silver equivalent grade metres) plus five intercepts of exceptional high-grade silver-lead-zinc-indium mineralisation with assays of 1m > 1,000 g/t Ag Eq.**

ORR221 to ORR223 were drilled to the east of the current resource to determine the strike extent of mineralisation, with drilling intersecting a broad, deep zone of mineralisation consistent with drilling on sections immediately to the west. This area is currently interpreted as a pipe of approximately 80m width, located close to the eastern caldera boundary, that has been tested to 250m depth from surface and that may be a feeder zone for the more flat-dipping mineralisation that extends to the west. Further drilling is required to determine the depth extent of this zone including diamond drilling to determine mineralisation style and structural control.

ORR239 was designed to test the down dip extent and possibly define the southern mineralisation boundary. ORR239 returned a far broader zone of mineralisation than anticipated based on results of previous drilling on adjacent sections. Further drilling will be required on multiple sections to fully determine the south and southwestern extent of mineralisation within the Orient East resource area.

Figure 2 Orient Silver Zinc Indium Project Orient East Infill & Extension Drilling Program

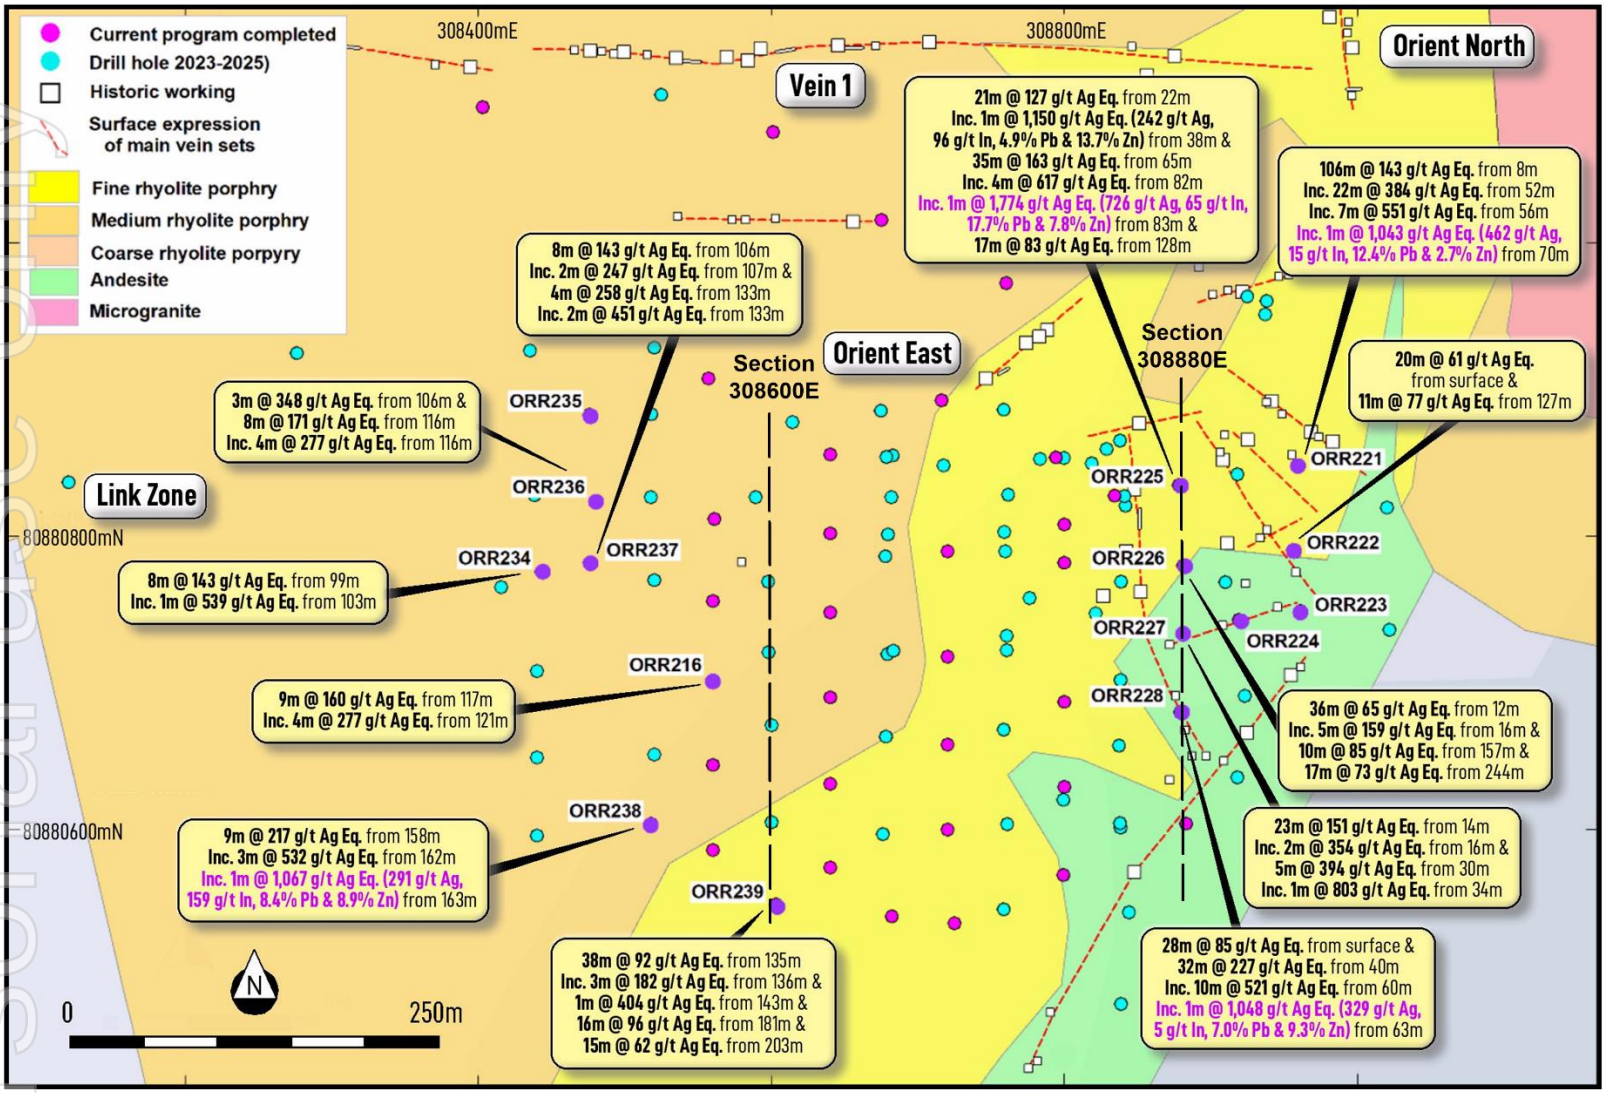

personal use only

For personal use only

Material drilling results include the following:

- ORR216 intersected **9m @ 160 g/t Ag Eq. (54 g/t Ag, 10 g/t In, 1.5% Pb & 1.0% Zn)** from 117m inc. **4m @ 277 g/t Ag Eq. (96 g/t Ag, 20 g/t In, 2.6% Pb & 1.6% Zn)** from 121m
- ORR221 intersected **106m @ 143 g/t Ag Eq. (47 g/t Ag, 5 g/t In, 1.1% Pb & 1.1% Zn)** from 8m inc. **22m @ 384 g/t Ag Eq. (122 g/t Ag, 14 g/t In, 3.0% Pb & 3.0% Zn)** from 52m inc. **7m @ 551 g/t Ag Eq. (156 g/t Ag, 23 g/t In, 3.7% Pb & 5.1% Zn)** from 56m inc. **1m @ 1,043 g/t Ag Eq. (462 g/t Ag, 15 g/t In, 12.4% Pb & 2.7% Zn)** from 70m plus **6m @ 108 g/t Ag Eq. (30 g/t Ag, 1 g/t In, 0.7% Pb & 1.0% Zn)** from 122m, **12m @ 120 g/t Ag Eq. (41 g/t Ag, 3 g/t In, 0.9% Pb & 0.9% Zn)** from 153m & **13m @ 89 g/t Ag Eq. (29 g/t Ag, 3 g/t In, 0.6% Pb & 0.7% Zn)** from 170m
- ORR222 intersected **20m @ 61 g/t Ag Eq. (19 g/t Ag, 2 g/t In, 0.9% Pb & 0.2% Zn)** from surface (0m) plus **11m @ 77 g/t Ag Eq. (26 g/t Ag, 0.5% Pb & 0.7% Zn)** from 127m
- ORR225 intersected **21m @ 127 g/t Ag Eq. (32 g/t Ag, 7 g/t In, 0.7% Pb & 1.4% Zn)** from 22m inc. **1m @ 1,150 g/t Ag Eq. (242 g/t Ag, 96 g/t In, 4.9% Pb & 13.7% Zn)** from 38m plus **35m @ 163 g/t Ag Eq. (59 g/t Ag, 7 g/t In, 1.3% Pb & 1.1% Zn)** from 65m inc. **4m @ 617 g/t Ag Eq. (245 g/t Ag, 26 g/t In, 5.8% Pb & 3.1% Zn)** from 82m inc. **1m @ 1,774 g/t Ag Eq. (726 g/t Ag, 65 g/t In, 17.7% Pb & 7.8% Zn)** from 83m plus **17m @ 83 g/t Ag Eq. (27 g/t Ag, 3 g/t In, 0.6% Pb & 0.7% Zn)** from 128m
- ORR226 intersected **36m @ 65 g/t Ag Eq. (21 g/t Ag, 7 g/t In, 0.6% Pb & 0.4% Zn)** from 12m inc. **5m @ 159 g/t Ag Eq. (51 g/t Ag, 36 g/t In, 1.8% Pb & 0.6% Zn)** from 16m plus **10m @ 85 g/t Ag Eq. (51 g/t Ag, 2 g/t In, 0.9% Pb)** from 157m plus **17m @ 73 g/t Ag Eq. (32 g/t Ag, 1 g/t In, 0.5% Pb & 0.4% Zn)** from 244m
- ORR227 intersected **23m @ 151 g/t Ag Eq. (51 g/t Ag, 3 g/t In, 1.3% Pb & 1.0% Zn)** from 14m inc. **2m @ 354 g/t Ag Eq. (124 g/t Ag, 8 g/t In, 3.1% Pb & 2.3% Zn)** from 16m and **5m @ 394 g/t Ag Eq. (145 g/t Ag, 7 g/t In, 3.7% Pb & 2.3% Zn)** from 30m inc. **1m @ 803 g/t Ag Eq. (325 g/t Ag, 19 g/t In, 8.2% Pb & 3.6% Zn)** from 34m
- ORR228 intersected **28m @ 85 g/t Ag Eq. (36 g/t Ag, 0.3% Pb & 0.8% Zn)** from surface (0m) plus 3**2m @ 227 g/t Ag Eq. (75 g/t Ag, 1 g/t In, 1.7% Pb & 1.8% Zn)** from 40m inc. **10m @ 521 g/t Ag Eq. (174 g/t Ag, 2 g/t In, 4.0% Pb & 4.0% Zn)** from 60m inc. **1m @ 1,048 g/t Ag Eq. (329 g/t Ag, 5 g/t In, 7.0% Pb & 9.3% Zn)** from 63m
- ORR234 intersected **8m @ 143 g/t Ag Eq. (38 g/t Ag, 15 g/t In, 1.1% Pb & 1.2% Zn)** from 99m inc. **1m @ 539 g/t Ag Eq. (124 g/t Ag, 91 g/t In, 3.8% Pb & 4.8% Zn)** from 103m
- ORR236 intersected **3m @ 348 g/t Ag Eq. (116 g/t Ag, 14 g/t In, 3.5% Pb & 2.0% Zn)** from 106m plus **8m @ 171 g/t Ag Eq. (39 g/t Ag, 14 g/t In, 1.1% Pb & 1.7% Zn)** from 116m inc. **4m @ 277 g/t Ag Eq. (59 g/t Ag, 26 g/t In, 1.7% Pb & 2.9% Zn)** from 116m
- ORR237 intersected **8m @ 143 g/t Ag Eq. (36 g/t Ag, 11 g/t In, 1.0% Pb & 1.3% Zn)** from 106m inc. 2m @ 247 g/t Ag Eq. (51 g/t Ag, 23 g/t In, 1.5% Pb & 2.7% Zn) from 107m plus **4m @ 258 g/t Ag Eq. (86 g/t Ag, 14 g/t In, 2.7% Pb & 1.4% Zn)** from 133m inc. **2m @ 451 g/t Ag Eq. (156 g/t Ag, 24 g/t In, 4.8% Pb & 2.3% Zn)** from 133m
- ORR238 intersected **9m @ 217 g/t Ag Eq. (63 g/t Ag, 25 g/t In, 1.8% Pb & 1.6% Zn)** from 158m inc. **3m @ 532 g/t Ag Eq. (157 g/t Ag, 69 g/t In, 4.4% Pb & 3.7% Zn)** from 162m inc. **1m @ 1,067 g/t Ag Eq. (291 g/t Ag, 159 g/t In, 8.4% Pb & 8.0% Zn)** from 163m
- ORR239 intersected **38m @ 92 g/t Ag Eq. (27 g/t Ag, 5 g/t In, 0.7% Pb & 0.8% Zn)** from 135m inc. **3m @ 182 g/t Ag Eq. (52 g/t Ag, 12 g/t In, 1.3% Pb & 1.5% Zn)** from 136m and **1m @ 404 g/t Ag Eq. (143 g/t Ag, 28 g/t In, 3.7% Pb & 2.3% Zn)** from 143m plus **16m @ 96 g/t Ag Eq. (29 g/t Ag, 2 g/t In, 0.7% Pb & 0.8% Zn)** from 181m & **15m @ 62 g/t Ag Eq. (20 g/t Ag, 1 g/t In, 0.5% Pb & 0.4% Zn)** from 203m

For personal use only

Table 1 Orient East Material Drilling Results (ORR216, ORR221 to ORR228 & ORR234 to ORR239)

Drill Hole	From (m)	To (m)	Intersection (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t	Ag gm	Ag Eq. gm
ORR216	9	11	2	29.5	0.1	1.0%	1.0%	118.7	59	237
ORR216	24	30	6	9.2	0.1	0.3%	0.3%	38.1	55	229
ORR216	80	86	6	8.4	0.2	0.3%	0.3%	37.3	50	224
ORR216	96	97	1	21.1	2.3	0.7%	0.8%	88.0	21	88
ORR216	117	126	9	53.7	10.0	1.5%	1.0%	159.5	483	1,435
inc.	*121*	*125*	*4*	*96.1*	*19.5*	*2.6%*	*1.6%*	*277.1*	*385*	*1,108*
ORR221	**8**	**114**	**106**	**46.8**	**4.7**	**1.1%**	**1.1%**	**142.7**	**4,958**	**15,127**
inc.	*52*	*74*	*22*	*121.6*	*13.7*	*3.0%*	*3.0%*	*383.8*	*2,675*	*8,444*
inc.	*56*	*63*	*7*	*155.9*	*23.4*	*3.7%*	*5.1%*	*550.8*	*1,091*	*3,856*
inc.	*70*	*74*	*4*	*290.4*	*19.0*	*7.7%*	*4.0%*	*771.2*	*1,162*	*3,085*
inc.	*70*	*71*	*1*	*461.5*	*14.5*	*12.4%*	*2.7%*	*1042.5*	*462*	*1,043*
ORR221	122	128	6	30.1	1.2	0.7%	1.0%	107.5	180	645
ORR221	140	142	2	26.7	0.1	0.6%	0.6%	79.7	53	159
ORR221	153	165	12	41.3	2.5	0.9%	0.9%	119.2	496	1,430
ORR221	170	183	13	29.4	2.6	0.6%	0.7%	89.2	382	1,159
ORR222	0	20	20	19.2	1.6	0.9%	0.2%	60.4	384	1,209
ORR222	27	34	7	9.3	0.2	0.2%	0.5%	43.6	65	305
ORR222	50	55	5	21.5	0.5	0.4%	0.5%	59.9	107	299
ORR222	127	138	11	25.6	0.2	0.5%	0.7%	77.0	282	847
ORR222	203	207	4	23.2	0.1	0.7%	0.3%	65.1	93	260
ORR223	4	24	20	17.5	0.1	0.2%	0.4%	44.7	349	894
ORR223	43	45	2	18.9	0.1	0.6%	0.7%	77.2	38	154
ORR224	0	8	8	9.9	0.9	0.3%	0.6%	52.7	79	421
ORR224	42	45	3	25.2	0.2	0.6%	0.3%	62.9	76	189
ORR225	22	43	21	32.1	7.0	0.7%	1.4%	127.4	675	2,676
inc.	*38*	*39*	*1*	*241.9*	*95.6*	*4.9%*	*13.7%*	*1150.1*	*242*	*1,150*
ORR225	**65**	**100**	**35**	**59.2**	**6.6**	**1.3%**	**1.1%**	**162.6**	**2,074**	**5,690**
inc.	*73*	*77*	*4*	*134.7*	*23.8*	*3.0%*	*3.0%*	*401.5*	*539*	*1,606*
inc.	*82*	*86*	*4*	*244.6*	*25.5*	*5.8%*	*3.1%*	*617.3*	*978*	*2,469*
inc.	*83*	*84*	*1*	*726.0*	*65.2*	*17.7%*	*7.8%*	*1774.7*	*726*	*1,775*
ORR225	128	145	17	26.7	3.1	0.6%	0.7%	83.3	454	1,417
ORR225	159	165	6	20.7	1.2	0.5%	0.6%	70.6	124	424
ORR226	12	48	36	20.9	7.1	0.6%	0.4%	65.2	753	2,348
inc.	16	21	5	50.5	35.5	1.8%	0.6%	158.5	252	793
ORR226	54	55	1	8.9	0.9	0.2%	0.3%	33.5	9	34
ORR226	62	65	3	11.0	0.5	0.3%	0.3%	38.7	33	116
ORR226	140	145	5	64.7	5.6	1.3%	0.1%	118.3	323	591
ORR226	157	167	10	50.5	2.4	0.9%	0.0%	85.3	505	853
ORR226	197	205	8	49.9	2.8	1.0%	0.0%	88.3	399	706
ORR226	218	219	1	32.3	3.1	0.6%	0.1%	57.3	32	57
ORR226	244	261	17	31.8	0.6	0.5%	0.4%	72.5	541	1,233
inc.	*246*	*248*	*2*	*55.5*	*0.7*	*0.9%*	*0.8%*	*127.0*	*111*	*254*
inc.	*259*	*261*	*2*	*69.9*	*0.1*	*1.2%*	*0.9%*	*160.1*	*140*	*320*
ORR226	279	292	13	25.5	2.7	0.5%	0.1%	48.8	331	635

For personal use only

Drill Hole	From (m)	To (m)	Intersection (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t	Ag gm	Ag Eq. gm
ORR227	**14**	**37**	**23**	**51.1**	**2.5**	**1.3%**	**1.0%**	**150.5**	**1,176**	**3,462**
inc.	*16*	*18*	*2*	*124.0*	*7.6*	*3.1%*	*2.3%*	*354.2*	*248*	*708*
inc.	*30*	*35*	*5*	*145.3*	*6.9*	*3.7%*	*2.3%*	*394.4*	*727*	*1,972*
inc.	*34*	*35*	*1*	*324.9*	*18.6*	*8.2%*	*3.6%*	*802.9*	*325*	*803*
ORR228	**0**	**28**	**28**	**36.2**	**0.1**	**0.3%**	**0.8%**	**85.2**	**1,013**	**2,387**
ORR228	**40**	**72**	**32**	**74.5**	**1.2**	**1.7%**	**1.8%**	**227.3**	**2,383**	**7,275**
inc.	*47*	*70*	*23*	*96.2*	*1.6*	*2.2%*	*2.4%*	*294.4*	*2,212*	*6,771*
inc.	*60*	*70*	*10*	*173.8*	*2.2*	*4.0%*	*4.0%*	*521.1*	*1,738*	*5,211*
inc.	*60*	*64*	*4*	*240.5*	*4.2*	*5.6%*	*7.2%*	*799.2*	*962*	*3,197*
inc.	*63*	*64*	*1*	*328.9*	*5.0*	*7.0%*	*9.3%*	*1048.0*	*329*	*1,048*
ORR234	16	17	1	20.9	0.2	0.6%	0.8%	83.2	21	83
ORR234	78	81	3	37.2	7.1	1.1%	0.8%	120.6	112	362
ORR234	99	107	8	37.5	15.2	1.1%	1.2%	143.4	300	1,147
ORR234	103	106	3	68.8	35.6	2.0%	2.3%	270.9	206	813
inc.	*103*	*104*	*1*	*124.4*	*90.6*	*3.8%*	*4.8%*	*539.2*	*124*	*539*
ORR234	109	122	13	8.6	1.4	0.2%	0.3%	29.9	112	388
ORR234	138	140	2	22.2	5.1	0.8%	0.5%	80.1	44	160
ORR234	147	148	1	16.2	0.9	0.4%	0.6%	63.6	16	64
ORR235	36	37	1	9.9	0.9	0.3%	0.4%	41.5	10	41
ORR235	41	45	4	12.5	1.0	0.4%	0.4%	47.3	50	189
ORR235	57	58	1	11.4	1.9	0.3%	0.3%	37.3	11	37
ORR235	88	92	4	11.9	1.2	0.3%	0.2%	35.9	48	144
ORR235	104	106	2	10.1	1.3	0.3%	0.4%	39.8	20	80
ORR235	116	128	12	11.0	0.8	0.3%	0.3%	37.8	132	454
ORR235	142	143	1	60.2	7.6	1.7%	1.7%	208.5	60	209
ORR236	35	36	1	12.3	0.3	0.4%	0.3%	44.2	12	65
ORR236	62	65	3	42.7	9.8	1.3%	1.2%	150.6	128	452
ORR236	106	109	3	115.8	14.2	3.5%	2.0%	347.5	347	1,043
ORR236	116	124	8	38.6	14.1	1.1%	1.7%	170.7	308	1,366
inc.	*116*	*120*	*4*	*59.2*	*25.6*	*1.7%*	*2.9%*	*276.6*	*237*	*1,106*
ORR236	141	148	7	13.7	1.4	0.4%	0.5%	51.6	96	362
ORR237	68	75	7	23.1	4.2	0.7%	0.6%	82.7	162	579
inc.	*68*	*69*	*1*	*86.3*	*13.6*	*2.7%*	*1.8%*	*278.2*	*86*	*278*
ORR237	80	83	3	60.4	19.0	1.9%	2.1%	242.4	181	727
inc.	*81*	*82*	*1*	*161.6*	*54.0*	*5.3%*	*5.6%*	*654.2*	*162*	*654*
ORR237	106	114	8	35.9	10.5	1.0%	1.3%	142.5	287	1,140
inc.	*107*	*109*	*2*	*51.0*	*23.3*	*1.5%*	*2.7%*	*246.9*	*102*	*494*
ORR237	118	119	1	22.9	8.2	0.7%	0.6%	81.1	23	81
ORR237	133	137	4	86.3	13.9	2.7%	1.4%	258.2	345	1,033
inc.	*133*	*135*	*2*	*156.2*	*24.2*	*4.8%*	*2.3%*	*450.5*	*312*	*901*
ORR237	143	144	1	27.3	3.0	0.8%	0.3%	72.6	27	73
ORR237	146	148	2	17.0	3.4	0.5%	0.6%	65.1	34	130
ORR237	153	157	4	11.7	3.5	0.3%	0.4%	44.9	47	180
ORR238	44	46	2	21.4	0.0	0.6%	0.6%	75.3	43	151
ORR238	158	167	9	63.4	25.2	1.8%	1.6%	217.1	571	1,954

Drill Hole	From (m)	To (m)	Intersection (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t	Ag gm	Ag Eq. gm
inc.	*162*	*165*	*3*	*156.8*	*68.8*	*4.4%*	*3.7%*	*532.2*	*471*	*1,597*
inc.	*163*	*164*	*1*	*290.8*	*159.3*	*8.4%*	*8.0%*	*1066.6*	*291*	*1,067*
ORR238	183	185	2	17.5	3.1	0.5%	0.5%	62.1	35	124
ORR238	228	232	4	12.6	0.2	0.4%	0.4%	44.1	50	177
ORR239	**135**	**173**	**38**	**26.5**	**4.6**	**0.7%**	**0.8%**	**91.7**	**1,008**	**3,486**
inc.	*136*	*139*	*3*	*52.0*	*12.1*	*1.3%*	*1.5%*	*182.2*	*156*	*547*
inc.	*143*	*144*	*1*	*142.8*	*28.0*	*3.7%*	*2.3%*	*404.3*	*143*	*404*
ORR239	181	197	16	28.6	2.4	0.7%	0.8%	95.9	457	1,535
inc.	*189*	*190*	*1*	*100.4*	*11.5*	*2.5%*	*2.8%*	*333.0*	*100*	*333*
ORR239	203	218	15	19.5	0.9	0.5%	0.4%	61.6	293	924
inc.	*210*	*211*	*1*	*76.7*	*2.0*	*2.0%*	*1.4%*	*218.0*	*77*	*218*

30 g/t Ag Eq. lower cut with no upper cut applied.
Intersection width is downhole width only.


For personal use only

For personal use only

2.1. Orient East Section 308600E

Previous drilling has indicated a southern structural boundary that appears to truncate the down dip extent of mineralisation to the south at Orient East. ORR238 and ORR239 were designed to test the down dip extent and possibly define the southern mineralisation boundary. Both holes intersected significant mineralisation with ORR239 returning a far broader zone of mineralisation than anticipated based on results of previous drilling on adjacent sections. Further drilling will be required on multiple sections to fully determine the south and southwestern extent of mineralisation within the Orient East resource area.

Figure 3 Orient East Section 308600E

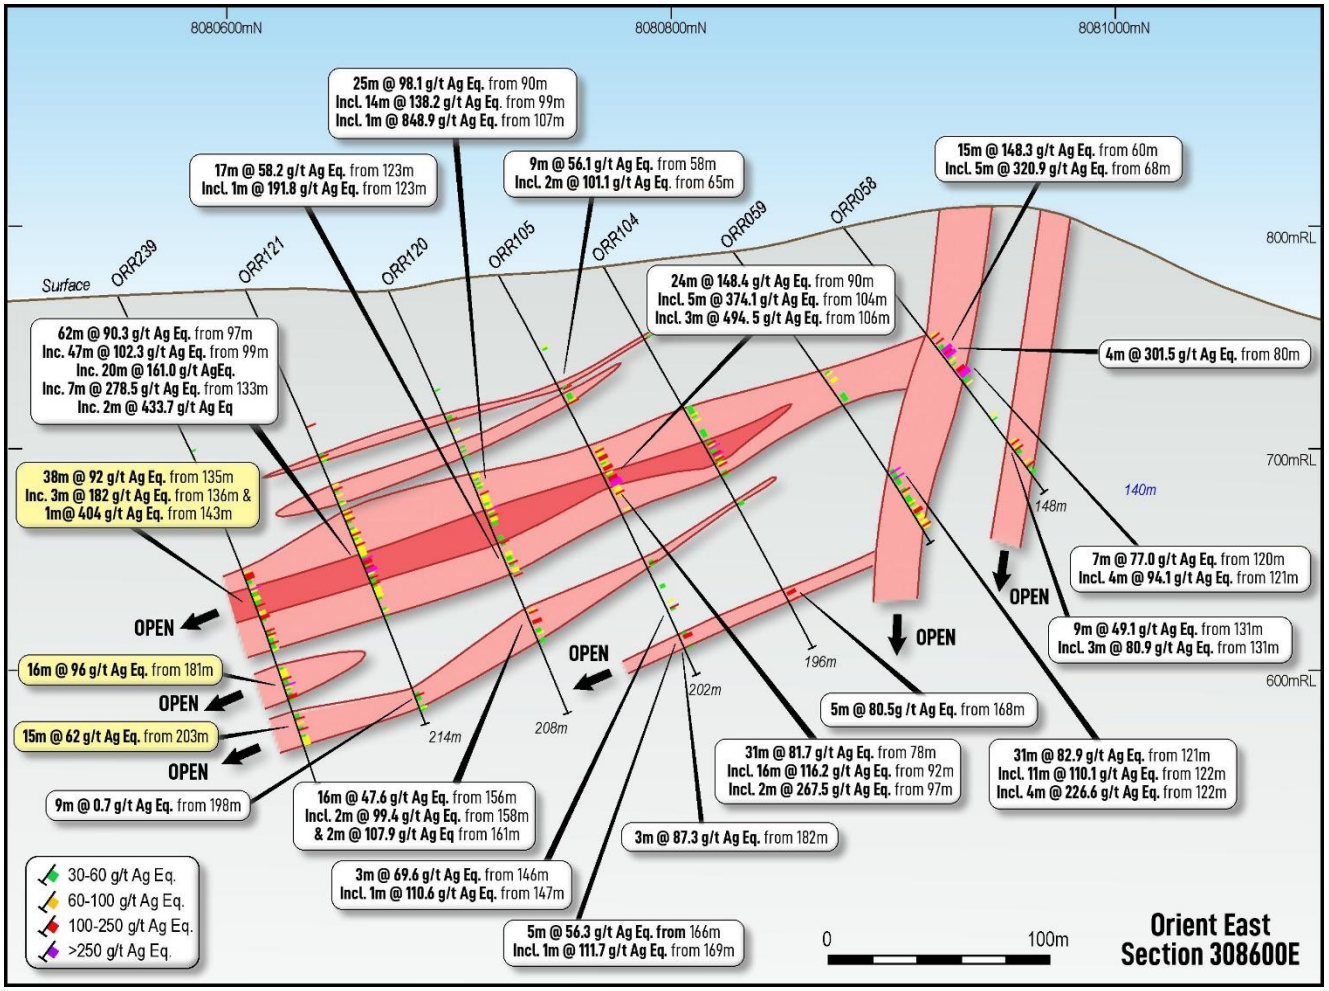

For personal use only


2.2. Orient East Section 308800E

ORR225 intersected a broad, deep zone of mineralisation consistent with adjacent holes to the west. This area is currently interpreted as a steep pipe of approximately 80m width, located close to the eastern caldera boundary, that has been tested to 250m depth from surface and that may be a feeder zone for the more flat-dipping mineralisation that extends to the west. Further drilling is required to determine the depth extent of this zone including diamond drilling to determine mineralisation style, geometry and structural control.

ORR226 to ORR228 intersected a thick zone of flat lying mineralisation at shallow depths. Of note is the deeper intersection in ORR228, which intersected an exceptional high-grade zone of **32m @ 227 g/t Ag Eq.** from 40m, including **10m @ 521 g/t Ag Eq.** from 60m, with a high-grade core of **1m @ 1,048 g/t Ag Eq. (329 g/t Ag, 5 g/t In, 7.0% Pb & 9.3% Zn)** from 63m.

Drilling intersected similar zones of mineralisation as that intersected on the adjacent section 40m to the west and Section 308880E, 80m to the west.

Figure 4 Orient East Section 308880E

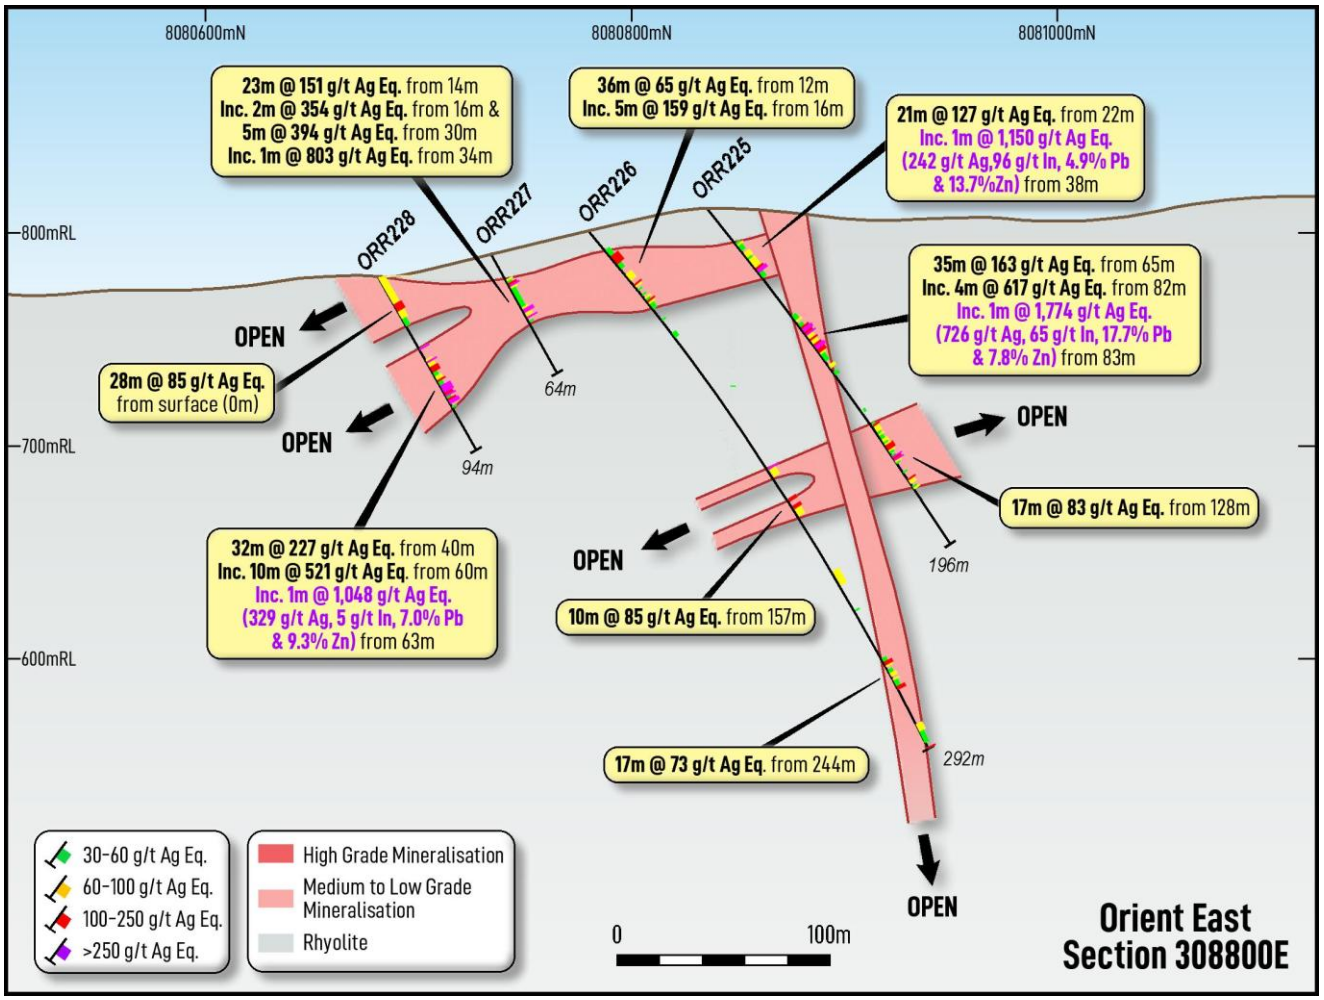

For personal use only

3. Orient Project Drilling Plans


The planned initial 110-hole drilling Orient resource infill and extension drilling program has been completed and the RC drill rig has been demobilised from site.

The data generated will be used to update the current Orient Silver Zinc Indium Project Mineral Resource, which is likely to be completed in Q4 2026. The updated Mineral Resource will provide greater confidence for the Orient Silver Zinc Indium Project Scoping Study which will be completed in early 2027.

Based on the results of the Orient drilling program, Iltani is planning a further 145 drill hole program, with the majority of planned drill holes targeting the Link Zone and the Orient West NE Extension (Figure 5), with the objective of materially growing the Orient Project Mineral Resource.

Subject to drill rig availability, Iltani is planning to commence the drill program in November 2026 (before North QLD wet season).

Figure 5 Orient Resource Infill & Extension Program - Phase 2

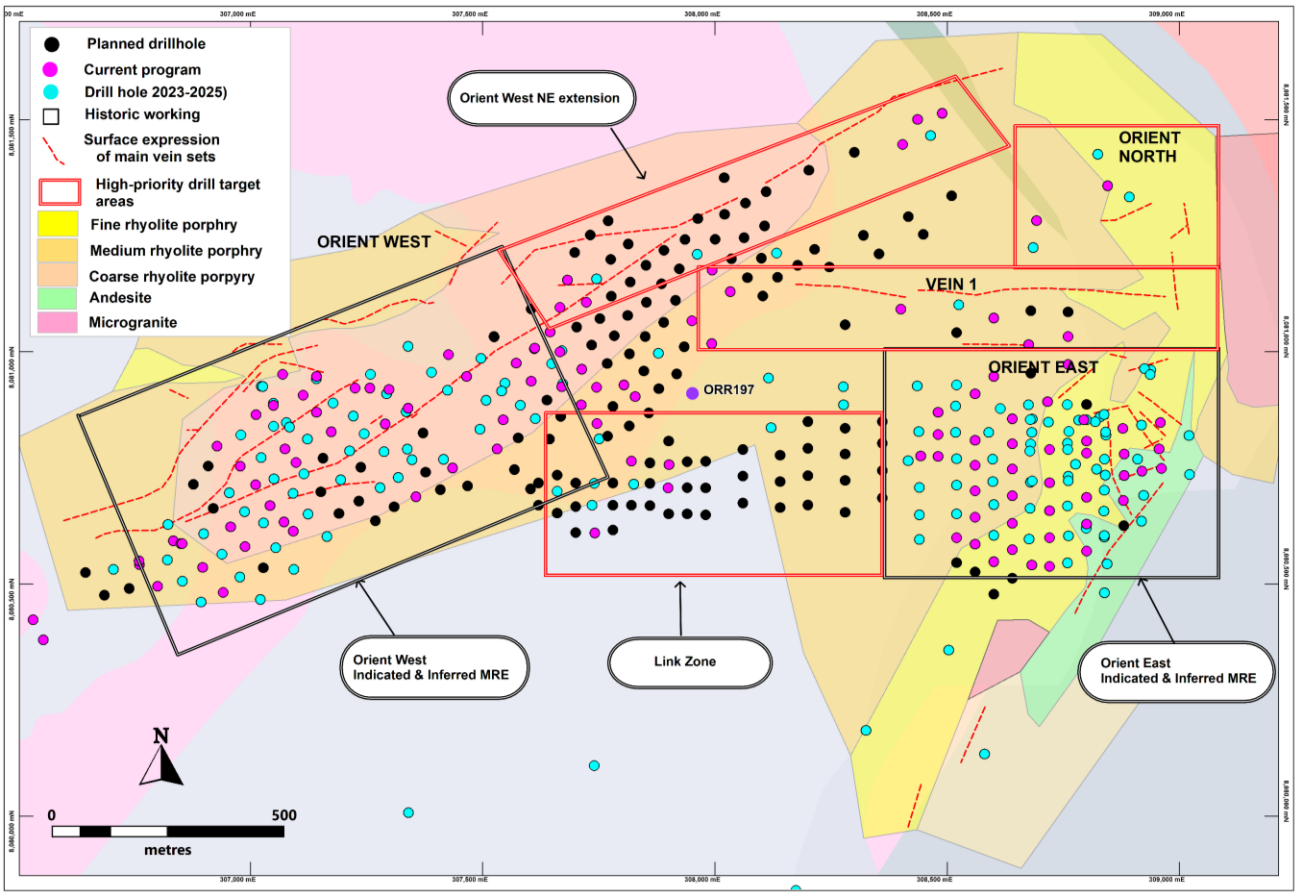

Authorisation
This announcement has been approved for issue by Donald Garner, Iltani Resources Managing Director.

Contact Details

For further information, please contact:

Donald Garner
Managing Director
Iltani Resources Limited
+61 438 338 496
dgarner@iltaniresources.com.au

Nathan Ryan
Investor Relations
NWR Communications
+61 420 582 887
nathan.ryan@nwrcommunications.com.au

Competent Persons Statement

Orient Mineral Resource Estimate

The information in this report that relates to the Orient Mineral Resource Estimate is based on information compiled by Mr Louis Cohalan who is a member of the Australian Institute of Geoscientists (AIG), and is a full time employee of Mining One Consultants, and who has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activities being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves' (JORC Code).

Mr Cohalan consents to the inclusion in this report of the matters based on the information in the form and context in which it appears.

Exploration Results

The information in this report that relates to Exploration Results is based on information compiled by Mr Erik Norum who is a member of the Australian Institute of Geoscientists (AIG), and is an employee of Iltani Resources Limited, and who has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activities being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves' (JORC Code).

Mr Norum consents to the inclusion in this report of the matters based on the information in the form and context in which it appears.

For personal use only

For personal use only

About Iltani Resources

Iltani Resources (ASX: ILT) is an ASX listed company focused on exploring and developing base metal, precious metal and critical mineral projects located within Australia.

Our flagship project is the Orient Silver Zinc Indium Project; part of larger Herberton Project located in Northern Queensland. Drilling completed by Iltani since June 2023 has defined an Orient Mineral Resource of **62.5 Mt @ 81.5 g/t Ag Eq. (23 g/t Ag, 12 g/t In, 0.6% Pb & 0.7% Zn)[1].** The resource assumptions and parameters are unchanged.


Table 2 Orient Project JORC Resource Estimate (30 g/t Ag Eq. cut-off grade)

	Resource Parameters						Contained Metal				
	Tonnes	Ag	In	Pb	Zn	Ag Eq.	Ag	In	Pb	Zn	Ag Eq.
Category	Mt	g/t	g/t	%	%	g/t	Moz	t	kt	kt	Moz
Indicated	38.8	23.2	10.8	0.55	0.68	81.7	28.9	420	212	263	101.9
Inferred	23.7	22.3	12.9	0.55	0.66	81.2	17.0	306	129	157	61.9
Total	**62.5**	**22.8**	**11.6**	**0.55**	**0.67**	**81.5**	**45.9**	**725**	**341**	**421**	**163.8**

The key economic minerals at Orient are silver-rich galena (lead sulphide) & indium-rich sphalerite (zinc sulphide), with historical test work indicating that silver, indium, lead and zinc are recoverable to, and payable in a lead-silver concentrate and a zinc-indium concentrate. Orient has the potential to become one of the world's largest sources of indium rich concentrate plus a material producer of silver, lead and zinc.

Indium is defined as a critical mineral and is key in high-tech applications, predominantly in touch screens (as indium tin oxide) with a growing use in AI data centres where indium phosphide (InP) is required to manufacture the laser chips that power high-speed optical transceivers, replacing slower copper wiring for data transmission.

Figure 6 Iltani Project Location

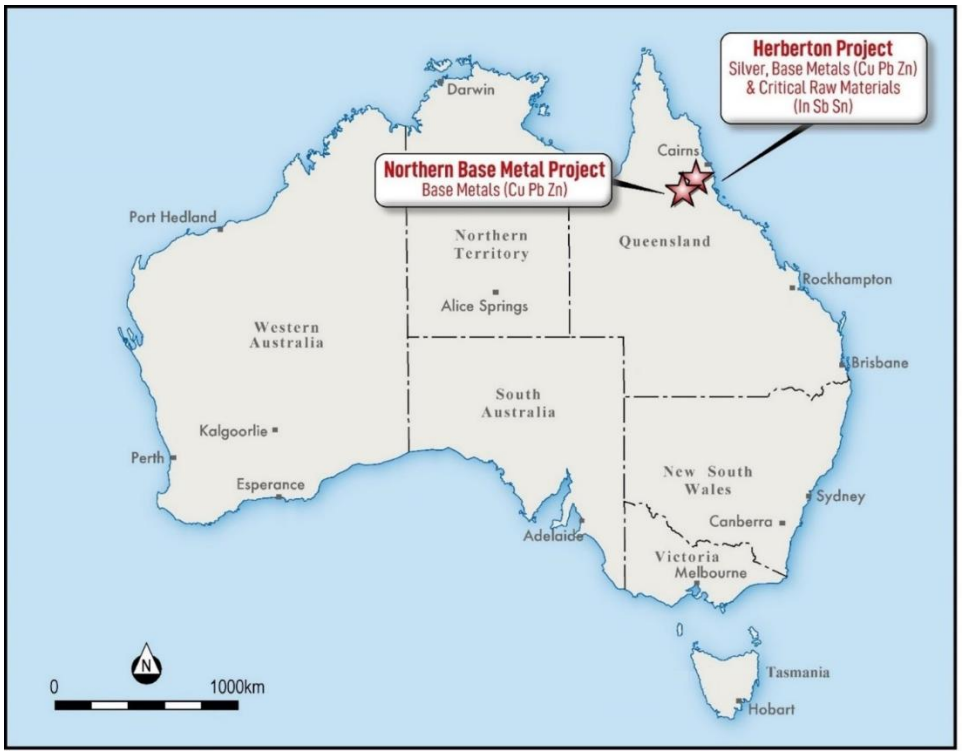

[1] ILT ASX Release 30 October 2025: Iltani delivers maiden Orient East JORC Mineral Resource estimate

For personal use only

Table 3 Orient Silver Zinc Indium Project Drillhole Data

Prospect	Hole_ID	Hole Type	Depth (m)	East	North	RL	Dip	Azi	Status
Orient East	ORR216	RC	214	308560	8080701	772	-60	360	Complete
Orient East	ORR221	RC	190	308959	8080848	816	-50	360	Complete
Orient East	ORR222	RC	250	308956	8080791	798	-50	360	Complete
Orient East	ORR223	RC	64	308961	8080749	786	-60	360	Complete
Orient East	ORR224	RC	64	308919	8080743	785	-60	360	Complete
Orient East	ORR225	RC	196	308878	8080835	812	-50	360	Complete
Orient East	ORR226	RC	292	308881	8080780	801	-50	360	Complete
Orient East	ORR227	RC	64	308881	8080734	790	-60	360	Complete
Orient East	ORR228	RC	94	308879	8080680	780	-60	360	Complete
Orient East	ORR234	RC	199	308443	8080776	784	-57	360	Complete
Orient East	ORR235	RC	199	308476	8080883	815	-60	360	Complete
Orient East	ORR236	RC	201	308480	8080824	799	-60	360	Complete
Orient East	ORR237	RC	201	308476	8080782	783	-60	360	Complete
Orient East	ORR238	RC	238	308518	8080604	772	-60	360	Complete
Orient East	ORR239	RC	238	308603	8080549	767	-65	360	Complete
Grid Coordinates are MGA94 – Zone 55									

For personal use only

Table 4 Orient RC Drill Program Assay Data (ORR216)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR216	142146	9	10	1	27.82	0.05	0.98%	1.11%	118.30
ORR216	142147	10	11	1	31.27	0.06	1.08%	0.98%	119.02
ORR216	142154	24	25	1	16.29	0.08	0.55%	0.48%	60.05
ORR216	142155	25	26	1	5.28	0.04	0.21%	0.20%	22.90
ORR216	142156	26	27	1	15.73	0.07	0.61%	0.63%	69.30
ORR216	142157	27	29	2	4.84	0.06	0.14%	0.19%	19.31
ORR216	142158	29	30	1	8.32	0.11	0.33%	0.35%	37.81
ORR216	142173	80	84	4	7.13	0.17	0.28%	0.32%	33.16
ORR216	142174	84	86	2	10.97	0.13	0.39%	0.41%	45.50
ORR216	142180	96	97	1	21.08	2.32	0.69%	0.83%	88.05
ORR216	142186	117	119	2	14.39	1.03	0.42%	0.43%	51.32
ORR216	142187	119	120	1	13.51	1.08	0.39%	0.37%	46.49
ORR216	142188	120	121	1	29.95	5.27	0.77%	0.68%	94.11
ORR216	142189	121	122	1	56.99	14.96	1.76%	1.20%	186.76
ORR216	142190	122	123	1	98.75	29.51	2.44%	2.43%	321.40
ORR216	142191	123	124	1	120.11	14.86	3.07%	1.14%	293.51
ORR216	142192	124	125	1	108.74	18.52	3.08%	1.60%	306.81
ORR216	142193	125	126	1	26.24	3.83	0.75%	0.58%	83.74
ORR216	142211	167	168	1	9.74	0.45	0.27%	0.38%	38.65

Intersection width is downhole width only

For personal use only

Table 5 Orient RC Drill Program Assay Data (ORR221)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR221	145310	0	4	4	2.71	0.24	0.06%	0.01%	5.37
ORR221	145311	4	8	4	8.44	0.83	0.25%	0.01%	18.31
ORR221	145312	8	12	4	21.17	2.3	1.08%	0.01%	60.91
ORR221	145313	12	16	4	69.37	10.1	1.37%	0.03%	124.39
ORR221	145314	16	20	4	51.93	3.56	0.77%	0.12%	86.58
ORR221	145315	20	21	1	74.23	7.66	1.83%	1.84%	235.00
ORR221	145316	21	22	1	37.53	9.4	0.70%	1.80%	157.10
ORR221	145317	22	23	1	28.96	4.47	0.73%	1.07%	110.86
ORR221	145318	23	24	1	24.69	1.5	1.22%	0.50%	94.04
ORR221	145319	24	25	1	10.54	0.31	0.61%	0.08%	36.38
ORR221	145320	25	26	1	4.97	0.23	0.23%	0.08%	17.41
ORR221	145321	26	27	1	44.39	2.55	0.69%	0.74%	107.06
ORR221	145322	27	28	1	31.78	4.62	0.38%	1.75%	135.44
ORR221	145323	28	29	1	26.24	3.66	0.46%	1.37%	112.80
ORR221	145324	29	30	1	64.55	11.68	1.41%	3.02%	271.78
ORR221	145326	30	31	1	52.05	13.91	0.82%	3.03%	239.41
ORR221	145327	31	32	1	33.56	5.91	0.54%	1.31%	121.04
ORR221	145328	32	33	1	11.42	0.77	0.29%	0.44%	44.11
ORR221	145329	33	37	4	2.33	0.17	0.05%	0.51%	29.85
ORR221	145330	37	41	4	2.07	0.11	0.05%	0.75%	41.51
ORR221	145331	41	45	4	9.52	0.28	0.21%	0.27%	30.72
ORR221	145332	45	49	4	6.18	0.12	0.14%	0.31%	26.82
ORR221	145333	49	50	1	7.23	0.08	0.18%	0.24%	25.73
ORR221	145334	50	51	1	13.1	0.28	0.32%	0.40%	44.64
ORR221	145335	51	52	1	27.73	2.91	0.62%	0.83%	92.72
ORR221	145336	52	53	1	24.18	6.02	0.49%	1.18%	103.87
ORR221	145337	53	54	1	37.11	2.76	0.77%	0.85%	108.34
ORR221	145339	54	55	1	39.94	3.37	0.86%	1.00%	122.05
ORR221	145340	55	56	1	69.95	6.31	1.60%	1.25%	192.50
ORR221	145341	56	57	1	217.79	20.49	4.95%	4.82%	645.24
ORR221	145342	57	58	1	328.37	18.75	8.03%	5.38%	892.37
ORR221	145344	58	59	1	133.51	45.78	2.81%	8.75%	694.20
ORR221	145345	59	60	1	44.34	5.7	0.92%	1.26%	143.28
ORR221	145346	60	61	1	133.6	23.07	3.13%	5.54%	533.86
ORR221	145347	61	62	1	160.12	18.04	4.06%	3.95%	511.07
ORR221	145348	62	63	1	73.66	32.02	1.67%	5.74%	435.89
ORR221	145351	63	64	1	32.34	4.21	0.77%	1.02%	113.18
ORR221	145352	64	65	1	34	6.22	0.75%	1.46%	137.07
ORR221	145353	65	66	1	53.97	4.8	1.27%	1.07%	155.05
ORR221	145354	66	67	1	62.28	22.71	1.38%	4.61%	353.37
ORR221	145355	67	68	1	16.37	1.16	0.32%	0.48%	52.44
ORR221	145356	68	69	1	16.18	1	0.42%	0.48%	55.47
ORR221	145357	69	70	1	35.48	3.77	0.79%	0.88%	109.44
ORR221	145358	70	71	1	461.53	14.48	12.36%	2.70%	1042.53
ORR221	145359	71	72	1	379.25	7.6	10.29%	1.45%	820.86

For personal use only

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR221	145360	72	73	1	188.73	41.86	4.75%	9.07%	832.67
ORR221	145361	73	74	1	132.21	12.13	3.32%	2.65%	388.79
ORR221	145362	74	75	1	25.95	1.01	0.66%	0.46%	72.77
ORR221	145363	75	76	1	27.09	1.03	0.67%	0.56%	79.71
ORR221	145364	76	77	1	13.79	0.49	0.34%	0.16%	33.85
ORR221	145365	77	78	1	10.49	0.39	0.25%	0.15%	27.20
ORR221	145366	78	79	1	31.99	0.97	0.80%	0.45%	83.29
ORR221	145367	79	80	1	117.34	13.77	2.99%	1.65%	312.52
ORR221	145368	80	81	1	40.43	3.3	1.03%	0.73%	115.22
ORR221	145369	81	82	1	22.48	1.23	0.54%	0.58%	71.46
ORR221	145370	82	83	1	11.67	0.48	0.28%	0.25%	34.03
ORR221	145371	83	84	1	19.63	0.68	0.51%	0.52%	64.05
ORR221	145372	84	85	1	24.95	1.45	0.57%	0.52%	72.06
ORR221	145373	85	86	1	33.99	7.97	0.80%	1.03%	117.79
ORR221	145374	86	87	1	22.18	1.39	0.52%	0.63%	73.17
ORR221	145376	87	88	1	20.9	1.15	0.52%	0.60%	70.12
ORR221	145377	88	89	1	5.05	0.25	0.13%	0.12%	15.88
ORR221	145378	89	90	1	9.32	0.24	0.22%	0.18%	26.44
ORR221	145379	90	91	1	13.9	0.5	0.36%	0.37%	45.69
ORR221	145380	91	92	1	14.22	0.53	0.34%	0.35%	44.21
ORR221	145381	92	93	1	18.75	0.65	0.48%	0.47%	59.71
ORR221	145382	93	94	1	32.93	3.89	0.76%	1.23%	123.63
ORR221	145383	94	95	1	242.42	6.38	6.42%	1.50%	548.83
ORR221	145384	95	96	1	98.74	7.33	2.56%	1.82%	284.57
ORR221	145385	96	97	1	25.19	0.88	0.62%	0.53%	74.44
ORR221	145386	97	98	1	10.6	0.46	0.27%	0.25%	32.71
ORR221	145387	98	99	1	6.76	0.29	0.14%	0.16%	19.91
ORR221	145388	99	100	1	25.97	0.89	0.43%	0.53%	68.44
ORR221	145389	100	102	2	22.88	0.81	0.46%	0.44%	61.78
ORR221	145390	102	103	1	3.11	0.17	0.07%	0.06%	8.68
ORR221	145391	103	104	1	17.94	0.45	0.42%	0.48%	57.06
ORR221	145392	104	105	1	14.02	0.21	0.38%	0.43%	48.95
ORR221	145393	105	107	2	2.53	0.18	0.06%	0.06%	7.50
ORR221	145394	107	109	2	12.98	0.16	0.31%	0.36%	42.19
ORR221	145395	109	110	1	26.3	0.21	0.68%	0.57%	78.94
ORR221	145396	110	111	1	18.89	0.42	0.44%	0.76%	72.93
ORR221	145397	111	112	1	19.58	0.16	0.46%	0.54%	63.18
ORR221	145398	112	113	1	20.72	0.18	0.50%	0.50%	63.71
ORR221	145399	113	114	1	15.97	0.2	0.33%	0.38%	46.76
ORR221	145401	114	115	1	1.7	0.1	0.04%	0.04%	4.95
ORR221	145402	115	116	1	1.72	0.13	0.03%	0.03%	4.41
ORR221	145403	116	117	1	1.3	0.09	0.02%	0.02%	2.84
ORR221	145404	117	119	2	2.21	0.2	0.04%	0.05%	6.41
ORR221	145405	119	121	2	1.8	0.15	0.04%	0.04%	5.26
ORR221	145406	121	122	1	6.7	0.15	0.21%	0.22%	25.30
ORR221	145407	122	123	1	33.31	0.85	0.83%	1.25%	125.88

For personal use only

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR221	145408	123	124	1	13.42	0.19	0.37%	0.44%	48.92
ORR221	145409	124	125	1	59.24	5.28	1.41%	2.28%	226.02
ORR221	145410	125	126	1	23.02	0.32	0.54%	0.65%	75.10
ORR221	145411	126	127	1	33.86	0.11	0.76%	0.81%	101.41
ORR221	145412	127	128	1	17.49	0.29	0.49%	0.65%	67.81
ORR221	145413	128	132	4	1.93	0.15	0.05%	0.06%	6.67
ORR221	145414	132	136	4	1.68	0.18	0.03%	0.03%	4.57
ORR221	145415	136	138	2	1.37	0.17	0.03%	0.03%	3.94
ORR221	145416	138	139	1	3.15	0.08	0.08%	0.09%	10.51
ORR221	145417	139	140	1	4.06	0.09	0.06%	0.07%	9.47
ORR221	145418	140	141	1	38.14	0.11	0.85%	0.76%	106.64
ORR221	145419	141	142	1	15.32	0.18	0.31%	0.53%	52.77
ORR221	145420	142	146	4	2.52	0.1	0.02%	0.03%	4.70
ORR221	145421	146	150	4	0.54	0.1	0.01%	0.02%	1.91
ORR221	145422	150	152	2	1.03	0.06	0.03%	0.03%	3.58
ORR221	145423	152	153	1	4.72	0.03	0.12%	0.13%	15.82
ORR221	145424	153	154	1	17.32	0.22	0.43%	0.56%	60.66
ORR221	145426	154	156	2	23.08	0.16	0.56%	0.69%	77.96
ORR221	145427	156	158	2	32.26	2.23	0.81%	0.77%	100.61
ORR221	145428	158	159	1	52.34	4.9	1.17%	1.32%	162.32
ORR221	145429	159	160	1	100.89	6.48	2.15%	1.40%	250.21
ORR221	145430	160	161	1	51.78	3.47	1.00%	1.11%	144.78
ORR221	145431	161	162	1	49.85	3.12	0.96%	0.83%	126.91
ORR221	145432	162	163	1	35.8	2.7	0.73%	0.70%	98.43
ORR221	145433	163	164	1	54.35	3.02	1.22%	1.23%	160.62
ORR221	145434	164	165	1	22.53	0.72	0.54%	0.53%	69.04
ORR221	145435	165	166	1	10.56	0.29	0.20%	0.21%	28.15
ORR221	145436	166	168	2	9.45	0.23	0.18%	0.21%	26.52
ORR221	145437	168	170	2	3.04	0.1	0.04%	0.05%	7.22
ORR221	145438	170	172	2	10.59	1.15	0.23%	0.30%	34.22
ORR221	145439	172	173	1	4.7	0.17	0.11%	0.11%	14.50
ORR221	145440	173	174	1	21.06	0.46	0.45%	0.53%	63.87
ORR221	145441	174	175	1	99.32	8.8	1.92%	1.71%	257.39
ORR221	145442	175	176	1	100.94	16.34	2.23%	2.44%	310.07
ORR221	145443	176	177	1	29.05	2.32	0.73%	0.91%	101.51
ORR221	145444	177	178	1	21.58	1.25	0.59%	0.66%	75.90
ORR221	145445	178	180	2	14.06	0.23	0.25%	0.27%	36.74
ORR221	145446	180	181	1	18.59	0.25	0.38%	0.48%	56.19
ORR221	145447	181	182	1	26.36	0.97	0.65%	0.91%	95.75
ORR221	145448	182	183	1	10.84	0.19	0.33%	0.39%	42.23
ORR221	145449	183	184	1	3.96	0.17	0.11%	0.17%	16.58
ORR221	145451	184	185	1	5.6	0.21	0.15%	0.25%	23.41
ORR221	145452	185	186	1	2.92	0.09	0.08%	0.11%	11.11
ORR221	145453	186	190	4	2.2	0.09	0.05%	0.07%	7.61

Intersection width is downhole width only

For personal use only

Table 6 Orient RC Drill Program Assay Data (ORR222)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR222	145454	0	4	4	13.34	0.22	1.21%	0.29%	70.91
ORR222	145455	4	8	4	22.47	1.14	0.82%	0.31%	67.73
ORR222	145456	8	12	4	2.22	0.14	0.47%	0.12%	24.77
ORR222	145457	12	16	4	27.11	5.74	1.33%	0.13%	83.56
ORR222	145458	16	20	4	30.98	0.59	0.43%	0.17%	55.23
ORR222	145463	27	28	1	17.12	0.64	0.42%	0.70%	67.38
ORR222	145464	28	29	1	18.82	0.16	0.45%	0.71%	70.41
ORR222	145465	29	30	1	16.65	0.38	0.35%	0.58%	58.58
ORR222	145466	30	32	2	1.77	0.11	0.03%	0.38%	21.72
ORR222	145467	32	34	2	4.55	0.08	0.08%	0.50%	32.74
ORR222	145477	50	51	1	37.07	0.98	0.79%	0.50%	91.04
ORR222	145478	51	52	1	31.58	0.59	0.74%	0.35%	75.71
ORR222	145479	52	53	1	6.76	0.15	0.14%	0.11%	17.22
ORR222	145480	53	54	1	7.51	0.11	0.16%	0.18%	22.10
ORR222	145481	54	55	1	24.42	0.48	0.32%	1.14%	93.41
ORR222	145505	127	128	1	23.04	0.18	0.40%	0.48%	61.45
ORR222	145506	128	129	1	73.33	0.28	1.16%	1.07%	168.44
ORR222	145507	129	130	1	51.23	0.6	1.12%	1.86%	184.72
ORR222	145508	130	131	1	21.85	0.21	0.45%	0.80%	78.31
ORR222	145510	131	132	1	16.41	0.12	0.35%	0.48%	52.95
ORR222	145511	132	133	1	23.09	0.49	0.47%	0.64%	72.14
ORR222	145512	133	134	1	28.45	0.09	0.61%	0.63%	81.65
ORR222	145513	134	135	1	7.69	0.06	0.16%	0.20%	23.53
ORR222	145514	135	136	1	12.32	0.09	0.27%	0.31%	37.46
ORR222	145515	136	137	1	8.92	0.07	0.19%	0.26%	28.87
ORR222	145516	137	138	1	15.29	0.09	0.33%	0.61%	57.67
ORR222	145545	203	207	4	23.21	0.08	0.69%	0.35%	65.06

Intersection width is downhole width only

For personal use only

Table 7 Orient RC Drill Program Assay Data (ORR223)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR223	145559	4	8	4	18.49	0.06	0.11%	0.37%	40.71
ORR223	145560	8	12	4	8.7	0.05	0.14%	0.26%	26.65
ORR223	145561	12	16	4	33.78	0.05	0.32%	0.51%	70.72
ORR223	145562	16	20	4	16.27	0.07	0.26%	0.29%	40.19
ORR223	145563	20	22	2	7.95	0.06	0.19%	0.29%	29.48
ORR223	145564	22	23	1	18.46	0.09	0.33%	0.49%	54.58
ORR223	145565	23	24	1	5.88	0.05	0.09%	1.16%	67.25
ORR223	145572	43	44	1	14.47	0.06	0.40%	0.63%	60.20
ORR223	145573	44	45	1	23.3	0.08	0.78%	0.86%	94.16
Intersection width is downhole width only									

Table 8 Orient RC Drill Program Assay Data (ORR224)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR224	145581	0	4	4	10.3	0.06	0.15%	0.63%	47.40
ORR224	145582	4	8	4	9.47	1.71	0.54%	0.57%	57.92
ORR224	145601	42	43	1	58.28	0.42	1.25%	0.46%	125.85
ORR224	145602	43	45	2	8.69	0.11	0.25%	0.28%	31.41
Intersection width is downhole width only									

Table 9 Orient RC Drill Program Assay Data (ORR225)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR225	145619	22	23	1	13.68	0.33	0.46%	0.27%	43.74
ORR225	145620	23	24	1	23.07	0.79	0.77%	0.84%	93.08
ORR225	145621	24	26	2	13.11	0.36	0.35%	0.33%	42.30
ORR225	145622	26	27	1	10.45	0.67	0.31%	0.59%	51.39
ORR225	145623	27	28	1	7.92	0.17	0.17%	0.32%	29.91
ORR225	145624	28	30	2	14.86	0.76	0.38%	0.64%	60.99
ORR225	145626	30	31	1	14.5	0.67	0.41%	0.63%	60.88
ORR225	145628	31	32	1	10.43	0.24	0.25%	0.41%	39.98
ORR225	145629	32	34	2	25.14	0.66	0.41%	0.60%	69.96
ORR225	145630	34	35	1	16.67	0.56	0.32%	0.69%	63.29
ORR225	145631	35	36	1	17.33	0.43	0.40%	0.81%	72.68
ORR225	145632	36	37	1	16.04	0.58	0.40%	0.66%	63.70
ORR225	145633	37	38	1	59.34	5.91	1.11%	0.99%	151.17
ORR225	145634	38	39	1	241.9	95.58	4.93%	13.71%	1150.14
ORR225	145636	39	40	1	83.83	33.94	1.30%	4.25%	359.17
ORR225	145638	40	41	1	17.53	1.98	0.39%	0.49%	56.91
ORR225	145640	41	43	2	17.93	0.55	0.31%	0.35%	46.74
ORR225	145648	65	67	2	13.09	0.76	0.24%	0.27%	35.47
ORR225	145649	67	68	1	13.97	0.79	0.30%	0.34%	41.97

For personal use only

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR225	145651	68	69	1	24.54	2.79	0.55%	0.67%	78.91
ORR225	145652	69	70	1	9.12	0.35	0.22%	0.21%	27.67
ORR225	145653	70	71	1	15.54	0.91	0.44%	0.54%	58.68
ORR225	145654	71	72	1	13.95	0.59	0.28%	0.36%	41.89
ORR225	145655	72	73	1	45.06	1.93	0.60%	0.66%	100.78
ORR225	145657	73	74	1	131.39	17.71	2.34%	3.04%	375.62
ORR225	145658	74	75	1	110.52	22.39	2.66%	2.89%	360.71
ORR225	145659	75	76	1	62.83	10.02	1.42%	1.34%	185.19
ORR225	145660	76	77	1	234.03	45.1	5.52%	4.65%	684.44
ORR225	145662	77	78	1	31.09	1.69	0.58%	0.54%	79.63
ORR225	145663	78	79	1	21.26	1.25	0.40%	0.50%	60.85
ORR225	145664	79	80	1	76.1	7.93	1.40%	1.31%	194.93
ORR225	145665	80	81	1	38.79	3.35	0.59%	0.67%	94.95
ORR225	145666	81	82	1	46.43	2.89	0.62%	0.55%	97.40
ORR225	145667	82	83	1	93.1	13.93	1.31%	1.78%	235.47
ORR225	145668	83	84	1	726	65.2	17.66%	7.79%	1774.69
ORR225	145670	84	85	1	109.91	12.05	2.81%	1.26%	278.47
ORR225	145671	85	86	1	49.24	10.94	1.26%	1.62%	180.60
ORR225	145672	86	87	1	35.14	4.61	0.87%	1.00%	118.39
ORR225	145674	87	88	1	21.89	0.7	0.54%	0.59%	70.99
ORR225	145676	88	90	2	11.78	0.37	0.32%	0.37%	42.05
ORR225	145677	90	92	2	12.48	0.38	0.39%	0.53%	52.84
ORR225	145678	92	94	2	2.84	0.24	0.08%	0.09%	10.46
ORR225	145679	94	96	2	17.11	0.23	0.47%	0.54%	61.24
ORR225	145680	96	98	2	6.96	0.2	0.19%	0.20%	23.97
ORR225	145681	98	100	2	17.65	0.28	0.32%	0.37%	48.05
ORR225	145691	128	129	1	16.83	0.6	0.34%	0.50%	54.28
ORR225	145692	129	130	1	34.4	0.85	0.72%	0.81%	100.89
ORR225	145693	130	131	1	31.5	1.52	0.53%	0.58%	80.15
ORR225	145694	131	132	1	30.63	0.78	0.60%	0.53%	79.07
ORR225	145695	132	133	1	24.76	0.58	0.53%	0.64%	75.91
ORR225	145696	133	134	1	16.27	0.3	0.33%	0.41%	48.90
ORR225	145698	134	135	1	30.82	0.65	0.61%	0.84%	95.27
ORR225	145699	135	136	1	12.62	0.16	0.32%	0.39%	43.69
ORR225	145701	136	137	1	12.33	0.27	0.22%	0.24%	32.44
ORR225	145702	137	138	1	19.29	0.89	0.52%	0.60%	67.99
ORR225	145703	138	139	1	22.11	1.73	0.55%	0.72%	78.41
ORR225	145704	139	140	1	11.38	0.37	0.33%	0.37%	41.87
ORR225	145705	140	141	1	34.75	7.98	0.80%	1.12%	123.34
ORR225	145706	141	142	1	77.12	15.8	1.64%	1.58%	222.16
ORR225	145707	142	143	1	44.22	16.21	1.10%	1.33%	157.94
ORR225	145708	143	144	1	23.76	2.76	0.60%	0.60%	76.30
ORR225	145709	144	145	1	11.23	0.48	0.32%	0.30%	38.06
ORR225	145717	159	160	1	36.51	2.91	1.09%	1.18%	135.43

For personal use only

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR225	145718	160	161	1	23.48	0.59	0.64%	0.78%	85.30
ORR225	145719	161	162	1	20.07	1.49	0.41%	0.70%	70.64
ORR225	145720	162	163	1	6.95	0.3	0.16%	0.18%	21.97
ORR225	145721	163	164	1	16.27	1.05	0.30%	0.37%	46.05
ORR225	145722	164	165	1	20.96	0.74	0.58%	0.45%	64.41
Intersection width is downhole width only									

Table 10 Orient RC Drill Program Assay Data (ORR226)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR226	145737	12	16	4	25.19	1.88	0.52%	0.01%	45.09
ORR226	145738	16	18	2	56.41	24.52	1.51%	0.02%	122.95
ORR226	145739	18	19	1	57.13	19.89	1.56%	0.46%	145.23
ORR226	145740	19	20	1	50.02	33.36	2.56%	1.28%	220.55
ORR226	145741	20	21	1	32.45	75.21	1.62%	1.11%	181.06
ORR226	145742	21	23	2	11.25	5.76	0.36%	0.27%	40.34
ORR226	145743	23	24	1	10.59	1.52	0.29%	0.33%	38.10
ORR226	145746	27	28	1	28.13	2.53	0.69%	0.60%	83.73
ORR226	145747	28	30	2	27.05	3.14	0.62%	0.64%	82.80
ORR226	145748	30	31	1	26.88	2.27	0.67%	0.64%	83.71
ORR226	145749	31	33	2	4.4	0.56	0.12%	0.22%	19.90
ORR226	145751	33	34	1	30.9	6.91	0.75%	1.03%	112.81
ORR226	145752	34	35	1	19.25	1.58	0.51%	0.61%	68.72
ORR226	145753	35	36	1	2.28	0.15	0.06%	0.15%	11.75
ORR226	145754	36	37	1	8.53	0.37	0.23%	0.33%	33.65
ORR226	145755	37	39	2	7.73	0.51	0.20%	0.24%	26.87
ORR226	145756	39	40	1	10.27	0.82	0.28%	0.37%	39.35
ORR226	145757	40	41	1	3.48	0.25	0.08%	0.11%	11.64
ORR226	145758	41	42	1	24.59	15.7	0.52%	0.97%	99.15
ORR226	145759	42	43	1	12.88	2.01	0.26%	0.53%	49.47
ORR226	145760	43	44	1	47.23	9.24	1.07%	1.37%	158.44
ORR226	145761	44	45	1	25.48	1.99	0.52%	0.45%	67.16
ORR226	145762	45	46	1	17.13	1.17	0.44%	0.45%	55.84
ORR226	145763	46	47	1	15.69	1.21	0.38%	0.51%	55.30
ORR226	145764	47	48	1	8.1	0.41	0.20%	0.31%	31.09
ORR226	145769	54	55	1	8.85	0.86	0.24%	0.31%	33.52
ORR226	145776	62	64	2	9.97	0.34	0.25%	0.30%	34.14
ORR226	145777	64	65	1	13.17	0.94	0.41%	0.39%	47.70
ORR226	145797	140	141	1	151.98	16.37	3.11%	0.10%	274.94
ORR226	145798	141	145	4	42.82	2.96	0.90%	0.06%	79.12
ORR226	145803	157	159	2	77.64	3.73	1.25%	0.05%	126.40
ORR226	145804	159	161	2	3.31	0.12	0.06%	0.01%	5.83

For personal use only

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR226	145805	161	163	2	83.62	2.58	1.53%	0.03%	140.95
ORR226	145806	163	167	4	44.05	2.74	0.85%	0.03%	76.76
ORR226	145816	197	201	4	53.38	2.87	0.98%	0.05%	91.91
ORR226	145817	201	205	4	46.33	2.8	0.97%	0.05%	84.61
ORR226	145822	218	219	1	32.25	3.1	0.59%	0.05%	57.30
ORR226	145832	244	245	1	21.91	0.4	0.37%	0.42%	56.57
ORR226	145833	245	246	1	20.42	0.36	0.37%	0.49%	58.14
ORR226	145834	246	247	1	52.22	0.83	0.75%	0.92%	125.55
ORR226	145835	247	248	1	58.83	0.52	0.98%	0.69%	128.47
ORR226	145837	248	249	1	31.06	0.22	0.55%	0.48%	74.85
ORR226	145838	249	250	1	7.14	0.1	0.12%	0.06%	14.33
ORR226	145839	250	252	2	21.13	0.81	0.40%	0.08%	39.65
ORR226	145840	252	254	2	30.16	0.56	0.54%	0.36%	67.99
ORR226	145841	254	255	1	3.24	0.15	0.06%	0.02%	6.27
ORR226	145842	255	256	1	39.91	4.31	0.69%	0.12%	72.23
ORR226	145843	256	258	2	23.08	0.26	0.38%	0.38%	55.94
ORR226	145844	258	259	1	17.72	0.04	0.29%	0.43%	49.29
ORR226	145845	259	260	1	70.41	0.1	1.21%	0.99%	163.19
ORR226	145846	260	261	1	69.36	0.15	1.21%	0.89%	157.03
ORR226	145855	279	283	4	36.79	4.05	0.76%	0.08%	69.73
ORR226	145856	283	285	2	19.36	1.37	0.37%	0.06%	36.04
ORR226	145857	285	289	4	17.9	1.67	0.36%	0.08%	35.29
ORR226	145858	289	291	2	11.42	1.11	0.22%	0.03%	21.31
ORR226	145859	291	292	1	50.61	7.8	1.14%	0.11%	100.07
Intersection width is downhole width only									

Table 11 Orient RC Drill Program Assay Data (ORR227)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR227	145865	14	15	1	15.11	0.37	0.42%	0.64%	62.09
ORR227	145866	15	16	1	12.06	0.67	0.33%	0.46%	47.25
ORR227	145867	16	17	1	82.8	3.58	2.18%	0.90%	206.88
ORR227	145868	17	18	1	165.27	11.7	3.98%	3.77%	501.46
ORR227	145869	18	19	1	24.57	1.67	0.64%	0.73%	84.67
ORR227	145870	19	20	1	14.12	0.49	0.39%	0.61%	58.77
ORR227	145871	20	24	4	11.38	0.55	0.29%	0.49%	46.76
ORR227	145872	24	28	4	10.22	0.26	0.27%	0.40%	39.99
ORR227	145873	28	29	1	6.49	0.07	0.17%	0.56%	40.28
ORR227	145874	29	30	1	19.31	0.82	0.50%	0.70%	72.72
ORR227	145876	30	31	1	249.68	7.01	6.82%	4.00%	695.64
ORR227	145878	31	32	1	106.63	7.51	2.48%	2.65%	331.43
ORR227	145879	32	33	1	20.46	0.39	0.49%	0.52%	64.09
ORR227	145880	33	34	1	24.82	0.93	0.58%	0.64%	78.05

For personal use only

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR227	145881	34	35	1	324.94	18.63	8.18%	3.56%	802.94
ORR227	145882	35	36	1	7.4	0.4	0.18%	0.10%	19.01
ORR227	145883	36	37	1	15.96	0.41	0.39%	0.38%	49.20
Intersection width is downhole width only									

Table 12 Orient RC Drill Program Assay Data (ORR228)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR228	145892	0	4	4	24.99	0.1	0.59%	0.79%	85.68
ORR228	145893	4	8	4	29.21	0.08	0.35%	0.79%	81.11
ORR228	145894	8	12	4	24.44	0.06	0.41%	0.93%	85.66
ORR228	145895	12	16	4	23.78	0.06	0.34%	1.22%	97.36
ORR228	145896	16	20	4	94.96	0.05	0.22%	0.73%	139.59
ORR228	145897	20	24	4	41.42	0.06	0.20%	0.47%	71.87
ORR228	145898	24	28	4	14.48	0.06	0.12%	0.34%	35.46
ORR228	145903	40	41	1	97	1.64	2.11%	2.01%	273.46
ORR228	145904	41	42	1	5.99	0.13	0.13%	0.15%	18.29
ORR228	145905	42	46	4	6.14	0.11	0.12%	0.19%	19.84
ORR228	145906	46	47	1	26.64	0.16	0.59%	0.70%	82.95
ORR228	145907	47	48	1	167.08	8.56	4.02%	5.19%	574.07
ORR228	145908	48	50	2	27.35	0.57	0.61%	0.74%	86.47
ORR228	145909	50	51	1	47.51	0.62	0.99%	0.99%	132.84
ORR228	145910	51	52	1	31.88	0.48	0.64%	0.90%	100.08
ORR228	145911	52	53	1	41.82	0.41	0.94%	0.90%	120.50
ORR228	145912	53	55	2	9.59	0.1	0.20%	0.37%	35.14
ORR228	145913	55	57	2	19.69	0.61	0.41%	0.91%	80.25
ORR228	145914	57	58	1	41.5	0.86	0.88%	1.46%	146.55
ORR228	145916	58	60	2	14.98	0.07	0.28%	0.31%	40.82
ORR228	145917	60	61	1	287.78	2.28	6.42%	3.96%	715.56
ORR228	145918	61	62	1	210.82	4.94	5.36%	7.84%	796.89
ORR228	145919	62	63	1	134.33	4.45	3.49%	7.49%	636.26
ORR228	145920	63	64	1	328.91	4.99	6.99%	9.33%	1047.97
ORR228	145921	64	65	1	106	0.48	2.54%	0.98%	245.62
ORR228	145923	65	66	1	207.96	1.18	5.07%	2.78%	527.72
ORR228	145924	66	67	1	17.34	0.1	0.35%	0.20%	40.11
ORR228	145926	67	68	1	63.35	0.38	1.37%	1.29%	177.03
ORR228	145927	68	69	1	237.05	2.67	5.34%	5.00%	678.90
ORR228	145928	69	70	1	144.95	0.84	3.40%	1.58%	345.08
ORR228	145929	70	71	1	8.04	0.08	0.16%	0.11%	19.47
ORR228	145930	71	72	1	9.5	0.15	0.20%	0.29%	31.14
Intersection width is downhole width only									

For personal use only

Table 13 Orient RC Drill Program Assay Data (ORR234)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR234	146406	16	17	1	20.85	0.15	0.60%	0.82%	83.23
ORR234	146426	78	79	1	16.44	5.05	0.47%	0.56%	63.47
ORR234	146427	79	80	1	37.08	4.74	1.27%	0.59%	114.09
ORR234	146428	80	81	1	58.08	11.55	1.67%	1.23%	184.23
ORR234	146437	99	100	1	8.43	0.48	0.23%	0.27%	30.17
ORR234	146438	100	101	1	16.86	3.07	0.43%	0.53%	60.13
ORR234	146439	101	102	1	28.06	5.45	0.84%	0.80%	100.51
ORR234	146440	102	103	1	16.64	2.9	0.46%	0.52%	60.39
ORR234	146441	103	104	1	124.4	90.59	3.76%	4.76%	539.21
ORR234	146443	104	105	1	40.43	9.7	1.19%	1.00%	137.42
ORR234	146444	105	106	1	41.6	6.45	1.10%	1.04%	136.01
ORR234	146445	106	107	1	23.69	3.05	0.70%	0.66%	82.99
ORR234	146448	109	110	1	10.08	0.52	0.26%	0.26%	32.65
ORR234	146449	110	112	2	14.23	2.36	0.40%	0.49%	53.88
ORR234	146451	112	113	1	6.1	1.59	0.17%	0.20%	23.00
ORR234	146452	113	114	1	16.28	1.2	0.44%	0.46%	55.69
ORR234	146453	114	118	4	2.36	0.29	0.07%	0.09%	9.14
ORR234	146454	118	120	2	13.89	2.65	0.33%	0.29%	41.75
ORR234	146455	120	121	1	4.27	2.19	0.12%	0.14%	16.59
ORR234	146456	121	122	1	9.26	1.72	0.24%	0.28%	32.72
ORR234	146463	135	136	1	7.57	3.79	0.22%	0.29%	31.87
ORR234	146464	136	137	1	4.68	2.64	0.18%	0.20%	22.56
ORR234	146465	137	138	1	0.52	0.17	0.01%	0.02%	1.81
ORR234	146466	138	139	1	11.89	2.2	0.43%	0.34%	45.31
ORR234	146467	139	140	1	32.41	8.04	1.16%	0.75%	114.86
ORR234	146473	147	148	1	16.2	0.88	0.43%	0.63%	63.58

Intersection width is downhole width only

Table 14 Orient RC Drill Program Assay Data (ORR235)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR235	146498	36	37	1	9.85	0.94	0.28%	0.43%	41.48
ORR235	146503	41	42	1	16.46	0.64	0.48%	0.41%	54.27
ORR235	146504	42	43	1	10.74	0.82	0.28%	0.41%	41.70
ORR235	146505	43	44	1	12.9	0.93	0.37%	0.45%	49.35
ORR235	146506	44	45	1	9.81	1.52	0.28%	0.47%	44.04
ORR235	146517	57	58	1	11.36	1.89	0.28%	0.30%	37.31
ORR235	146530	88	89	1	13.57	1.42	0.34%	0.32%	42.44

For personal use only

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR235	146531	89	90	1	22.11	2.75	0.63%	0.40%	65.52
ORR235	146532	90	91	1	1.16	0.08	0.03%	0.03%	3.86
ORR235	146533	91	92	1	10.87	0.52	0.25%	0.23%	31.73
ORR235	146540	104	106	2	10.13	1.3	0.31%	0.36%	39.79
ORR235	146545	116	117	1	13.59	1.25	0.47%	0.27%	44.51
ORR235	146546	117	118	1	42.02	1	1.29%	0.21%	98.68
ORR235	146547	118	119	1	8.86	0.49	0.28%	0.20%	29.16
ORR235	146548	119	120	1	6.45	0.46	0.20%	0.19%	23.51
ORR235	146549	120	121	1	11.8	0.88	0.37%	0.43%	46.74
ORR235	146551	121	125	4	5.03	0.47	0.16%	0.29%	25.30
ORR235	146552	125	126	1	1.8	0.27	0.07%	0.08%	8.23
ORR235	146553	126	127	1	8.11	1.58	0.23%	0.32%	33.25
ORR235	146554	127	128	1	18.79	2.04	0.60%	0.55%	68.63
ORR235	146560	142	143	1	60.17	7.57	1.69%	1.69%	208.55
Intersection width is downhole width only									

Table 15 Orient RC Drill Program Assay Data (ORR236)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR236	146591	35	36	1	12.28	0.25	0.41%	0.34%	44.15
ORR236	146601	62	63	1	32.2	9.69	0.92%	0.93%	115.96
ORR236	146602	63	64	1	70.23	15.99	2.10%	1.80%	242.68
ORR236	146603	64	65	1	25.74	3.6	0.76%	0.77%	93.17
ORR236	146617	106	107	1	203.02	26.83	5.96%	3.83%	619.41
ORR236	146619	107	108	1	98.13	11.34	3.04%	1.48%	285.56
ORR236	146620	108	109	1	46.19	4.34	1.45%	0.76%	137.67
ORR236	146627	116	117	1	57.89	22	1.32%	2.90%	260.69
ORR236	146628	117	118	1	98.49	34.71	3.23%	2.94%	377.45
ORR236	146629	118	119	1	38.35	34.55	1.08%	3.43%	265.11
ORR236	146630	119	120	1	42.11	11.29	1.29%	2.19%	202.99
ORR236	146631	120	121	1	30.95	3.57	0.93%	0.81%	106.23
ORR236	146632	121	122	1	19.27	2.44	0.52%	0.83%	80.30
ORR236	146633	122	123	1	11.96	2.27	0.31%	0.32%	39.91
ORR236	146634	123	124	1	9.4	1.97	0.26%	0.26%	32.86
ORR236	146644	141	142	1	38.4	4.62	1.16%	1.22%	142.69
ORR236	146645	142	143	1	18.67	2.91	0.51%	0.63%	69.60
ORR236	146646	143	144	1	10.85	0.69	0.34%	0.37%	41.61
ORR236	146647	144	145	1	4.66	0.28	0.15%	0.14%	16.93
ORR236	146648	145	146	1	10.27	0.56	0.33%	0.31%	37.84
ORR236	146649	146	147	1	1.64	0.21	0.06%	0.06%	6.96

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR236	146651	147	148	1	11.39	0.33	0.34%	0.44%	45.88
Intersection width is downhole width only									

Table 16 Orient RC Drill Program Assay Data (ORR237)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR237	146695	68	69	1	86.31	13.64	2.71%	1.78%	278.21
ORR237	146697	69	70	1	28.64	7.33	0.87%	1.02%	114.43
ORR237	146699	70	72	2	6.85	0.91	0.18%	0.20%	23.64
ORR237	146701	72	73	1	8.18	1.51	0.26%	0.36%	36.37
ORR237	146702	73	74	1	14.77	3.88	0.49%	0.58%	63.20
ORR237	146703	74	75	1	10.06	1.12	0.33%	0.35%	39.67
ORR237	146706	80	81	1	7.71	0.75	0.21%	0.29%	30.13
ORR237	146707	81	82	1	161.61	54.04	5.28%	5.57%	654.23
ORR237	146708	82	83	1	11.78	2.12	0.34%	0.35%	42.76
ORR237	146716	106	107	1	14.92	2.93	0.48%	0.67%	66.85
ORR237	146717	107	108	1	35.74	13.47	1.04%	1.78%	168.15
ORR237	146718	108	109	1	66.3	33.04	1.87%	3.53%	325.57
ORR237	146719	109	110	1	37.49	5.94	0.96%	0.75%	112.22
ORR237	146720	110	111	1	26.13	6.42	0.69%	0.81%	94.29
ORR237	146722	111	112	1	28.82	9.87	0.75%	1.41%	130.85
ORR237	146723	112	113	1	42.76	8.76	1.13%	1.28%	151.21
ORR237	146724	113	114	1	34.67	3.18	0.78%	0.55%	91.08
ORR237	146730	118	119	1	22.85	8.2	0.69%	0.59%	81.12
ORR237	146739	133	134	1	115.68	15.82	3.16%	1.48%	309.62
ORR237	146740	134	135	1	196.76	32.67	6.40%	3.03%	591.40
ORR237	146741	135	136	1	23.77	4.89	0.82%	0.72%	91.49
ORR237	146743	136	137	1	9.03	2.26	0.33%	0.37%	40.43
ORR237	146749	143	144	1	27.3	2.97	0.77%	0.33%	72.64
ORR237	146753	146	147	1	8.54	1.33	0.24%	0.33%	34.32
ORR237	146754	147	148	1	25.36	5.49	0.74%	0.83%	95.98
ORR237	146760	153	155	2	8.12	1.07	0.23%	0.26%	30.07
ORR237	146761	155	156	1	0.57	0.08	0.02%	0.02%	2.10
ORR237	146762	156	157	1	29.79	11.66	0.80%	1.07%	117.30
Intersection width is downhole width only									

For personal use only

For personal use only

Table 17 Orient RC Drill Program Assay Data (ORR238)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR238	146795	44	45	1	18.75	0.03	0.58%	0.50%	64.18
ORR238	146796	45	46	1	24.07	0.04	0.71%	0.74%	86.32
ORR238	146822	79	80	1	10.77	0.005	0.38%	0.43%	45.74
ORR238	146842	113	114	1	7.61	1.02	0.29%	0.63%	49.93
ORR238	146873	158	159	1	9.6	0.47	0.30%	0.34%	37.65
ORR238	146874	159	160	1	21.74	8.82	0.67%	0.74%	87.12
ORR238	146876	160	161	1	23.1	6.12	0.71%	0.64%	83.34
ORR238	146877	161	162	1	18.79	3.89	0.52%	0.61%	69.46
ORR238	146878	162	163	1	102.47	24.29	2.55%	1.82%	295.46
ORR238	146879	163	164	1	290.76	159.31	8.42%	8.01%	1066.59
ORR238	146880	164	165	1	77.3	22.89	2.20%	1.36%	234.70
ORR238	146881	165	166	1	13.98	0.96	0.35%	0.33%	43.39
ORR238	146882	166	167	1	13.23	0.28	0.26%	0.28%	36.43
ORR238	146899	183	184	1	26.23	5.76	0.70%	0.74%	90.71
ORR238	146901	184	185	1	8.85	0.52	0.29%	0.28%	33.43
ORR238	146930	228	229	1	29.03	0.27	0.77%	0.82%	97.80
ORR238	146931	229	230	1	7.5	0.06	0.20%	0.24%	26.70
ORR238	146932	230	231	1	3.31	0.06	0.09%	0.11%	11.88
ORR238	146933	231	232	1	10.62	0.22	0.35%	0.34%	40.21

Intersection width is downhole width only

Table 18 Orient RC Drill Program Assay Data (ORR239)

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR239	146982	75	76	1	18.61	0.05	0.62%	0.22%	51.66
ORR239	147013	135	136	1	23.59	4.1	0.54%	0.83%	86.33
ORR239	147014	136	137	1	34.95	7.47	0.86%	0.92%	115.00
ORR239	147016	137	138	1	74.02	15.67	1.93%	1.90%	245.28
ORR239	147017	138	139	1	46.97	13.07	1.18%	1.82%	186.25
ORR239	147018	139	140	1	9.29	0.79	0.25%	0.32%	34.68
ORR239	147019	140	141	1	10.99	1.05	0.33%	0.37%	41.48
ORR239	147020	141	142	1	6.05	0.5	0.20%	0.22%	24.77
ORR239	147021	142	143	1	21.03	3.21	0.57%	0.69%	77.23
ORR239	147022	143	144	1	142.84	28.02	3.68%	2.34%	404.28
ORR239	147023	144	145	1	29.53	5.15	0.63%	0.82%	95.74
ORR239	147024	145	146	1	14.63	1.15	0.40%	0.44%	51.48
ORR239	147026	146	147	1	10.65	0.64	0.32%	0.40%	42.39
ORR239	147027	147	148	1	19.5	4.33	0.60%	0.60%	72.97
ORR239	147028	148	149	1	23.3	3.64	0.56%	0.66%	78.10
ORR239	147029	149	150	1	18.38	1.82	0.51%	0.44%	59.63

For personal use only

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR239	147030	150	151	1	11.62	1.27	0.27%	0.34%	38.81
ORR239	147031	151	152	1	30.42	21.06	0.76%	1.60%	147.69
ORR239	147032	152	153	1	2.23	0.47	0.07%	0.09%	9.35
ORR239	147033	153	154	1	7.33	1.06	0.23%	0.27%	29.68
ORR239	147034	154	155	1	31.6	5.76	0.78%	0.72%	98.12
ORR239	147035	155	156	1	20.92	4.09	0.54%	0.63%	73.35
ORR239	147036	156	157	1	81.43	13.89	2.02%	1.65%	242.74
ORR239	147037	157	158	1	54.17	19.65	1.47%	1.94%	213.04
ORR239	147038	158	159	1	13.56	1.96	0.38%	0.47%	51.62
ORR239	147039	159	160	1	4.44	0.39	0.11%	0.15%	16.22
ORR239	147040	160	161	1	5.8	0.4	0.19%	0.23%	24.30
ORR239	147041	161	162	1	3.06	0.24	0.11%	0.13%	13.31
ORR239	147042	162	163	1	1.96	0.15	0.05%	0.06%	7.02
ORR239	147043	163	164	1	57.2	3.77	1.66%	1.95%	215.53
ORR239	147044	164	165	1	13.31	0.42	0.38%	0.44%	49.06
ORR239	147045	165	166	1	35.94	2.04	0.97%	1.06%	124.42
ORR239	147046	166	167	1	15.74	1	0.45%	0.60%	62.13
ORR239	147047	167	168	1	14.6	0.87	0.44%	0.53%	56.94
ORR239	147048	168	169	1	12.38	0.91	0.39%	0.29%	41.31
ORR239	147049	169	170	1	63.69	2.57	1.78%	1.30%	192.96
ORR239	147051	170	171	1	12.54	0.66	0.40%	0.43%	48.63
ORR239	147052	171	172	1	11.29	0.47	0.38%	0.45%	47.50
ORR239	147053	172	173	1	17.04	1.07	0.47%	0.65%	67.05
ORR239	147062	181	182	1	11.28	0.65	0.32%	0.35%	40.46
ORR239	147063	182	183	1	19.68	1.37	0.54%	0.55%	67.39
ORR239	147064	183	184	1	25.77	2.97	0.67%	0.81%	91.46
ORR239	147065	184	185	1	24.02	3.31	0.63%	0.82%	89.20
ORR239	147066	185	186	1	22.89	2.65	0.60%	0.79%	85.19
ORR239	147067	186	187	1	60.28	4.27	1.59%	1.42%	189.74
ORR239	147068	187	188	1	14.54	1.88	0.43%	0.55%	58.37
ORR239	147069	188	189	1	15.2	1.38	0.40%	0.50%	55.14
ORR239	147070	189	190	1	100.37	11.45	2.48%	2.77%	333.03
ORR239	147071	190	191	1	21.32	1.2	0.59%	0.70%	78.02
ORR239	147072	191	192	1	11.05	0.32	0.34%	0.41%	44.24
ORR239	147073	192	193	1	5.47	0.18	0.16%	0.17%	19.42
ORR239	147074	193	194	1	11.5	0.36	0.33%	0.40%	43.07
ORR239	147076	194	195	1	51.84	3.89	1.35%	1.29%	166.39
ORR239	147077	195	196	1	47.11	1.89	1.05%	0.77%	123.65
ORR239	147078	196	197	1	14.98	0.73	0.39%	0.41%	49.81
ORR239	147085	203	204	1	12.45	0.18	0.28%	0.18%	31.66
ORR239	147086	204	205	1	12.66	0.28	0.30%	0.25%	36.18
ORR239	147087	205	206	1	27.06	2.28	0.78%	1.04%	108.08
ORR239	147088	206	207	1	2.33	0.16	0.06%	0.07%	8.36
ORR239	147089	207	208	1	22.16	0.86	0.64%	0.94%	92.40

Hole	Sample ID	From (m)	To (m)	Intersect (m)	Ag g/t	In g/t	Pb %	Zn %	Ag Eq. g/t
ORR239	147090	208	209	1	6.9	0.16	0.12%	0.11%	16.81
ORR239	147091	209	210	1	12.36	0.24	0.40%	0.40%	46.74
ORR239	147092	210	211	1	76.71	2.03	2.02%	1.37%	218.04
ORR239	147093	211	212	1	7.1	0.15	0.17%	0.12%	19.39
ORR239	147094	212	213	1	3.46	0.1	0.09%	0.06%	9.55
ORR239	147095	213	214	1	16.49	0.48	0.48%	0.45%	56.16
ORR239	147096	214	218	4	23.36	1.83	0.67%	0.44%	70.20
Intersection width is downhole width only									

For personal use only

For personal use only

JORC Code, 2012 Edition – Table 1
Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	• Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. • Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. • Aspects of the determination of mineralisation that are Material to the Public Report. • In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	• Drilling reported is reverse circulation (RC) drilling. • The drilling was completed by Charters Towers, Qld based drilling contractors Eagle Drilling Pty Ltd. • RC drilling returned samples through a fully enclosed cyclone system, then via a remote controlled gate into a cone splitter. 1m RC samples were homogenised and collected by a static cone splitter to produce a representative 3-5kg sub sample. • Sampling comprises 4m composite samples or, where visual mineralisation is encountered, 1m increment RC sub-samples, were bagged and sent to Intertek Townsville for preparation and analysis. • Preparation consisted of drying of the sample and the entire sample being crushed to 70% passing 6mm and pulverised to 85% passing 75 microns in a ring and puck pulveriser. • Analysis will consist of four acid digest with Inductively Coupled Plasma Mass Spectrometry (ICP-MS) (4A-MS48) analysis for the following elements: Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y Zn, Zr. • Ore grade sample analysis consisted of four acid digest with Inductively Coupled Plasma Atomic Emission Spectroscopy (ICP-AES) finish. This was carried out for Ag, Pb, Zn, Sn & In.
Drilling techniques	• Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	• The drilling was completed using a track mounted RC rig and a wheeled RC rig, both utilising 6m rods with reverse circulation capability. • Drilling diameter was 5.5 inch RC hammer using a face sampling bit. • Downhole surveys were undertaken at nominal 30m intervals during drilling utilising a digitally controlled Imdex Gyroscope instrument
Drill sample recovery	• Method of recording and assessing core and chip sample recoveries and results assessed. • Measures taken to maximise sample recovery and ensure representative nature of the samples. • Whether a relationship exists between sample recovery and	• A visual estimate as to the quality of samples is made by the geologist on the rig • Samples with no recovery or very low recoveries were recorded also in the logging sheet. A few samples were collected wet due to rig unable to keep the hole dry. Wet samples were noted in the logging sheet. • Iltani personnel and Eagle Drilling crew monitor sample recovery, size and moisture, making

For personal use only

Criteria	JORC Code explanation	Commentary
	grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	appropriate adjustments as required to maintain quality. • A cone splitter is mounted beneath the cyclone to ensure representative samples are collected. • The cyclone and cone splitter were cleaned with compressed air necessary to minimise contamination. • No significant contamination or bias has been noted in the current drilling.
Logging	• Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. • The total length and percentage of the relevant intersections logged.	• Geological logging was carried out on RC chips by suitably qualified geologists. Lithology, veining, alteration, mineralisation and weathering are recorded in the geology table of the drill hole database. Final and detailed digital geological logs were forwarded from the field following sampling. • Geological logging of the RC samples is qualitative and descriptive in nature. • Observations were recorded appropriate to the sample type based on visual field estimates of sulphide content and sulphide mineral species. • All drill holes are logged to the end of hole (EoH).
Sub-sampling techniques and sample preparation	• If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled.	• 1m increment samples were collected off the drill rig via cyclone - cone splitter into calico bags with a respective weight between 3-5kg. • The onsite geologist selects the mineralised interval from logging of washed RC chips, based on identification of either rock alteration and/or visual sulphides. Mineralised intervals are collected as 1m samples and those samples with no visual evidence of mineralisation are collected as 4m composite samples using a sample spear for despatch to the laboratory. If elevated results are received from the composite samples, the corresponding retained 1m samples are collected and submitted for analysis. • Industry standard sample preparation is conducted under controlled conditions within the laboratory and is considered appropriate for the sample types. • QAQC samples (standards, blanks and field duplicates) were submitted at a frequency of at least 1 in 25. Regular reviews of the sampling were carried out by Iltani Geologist to ensure all procedures and best industry practice were followed. • Sample sizes and preparation techniques are considered appropriate for the nature of mineralisation.

For personal use only

Criteria	JORC Code explanation	Commentary
Quality of assay data and laboratory tests	• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. • For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. • Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	• Industry standard assay techniques were used to assay for silver and base metal mineralisation (ICP for multi-elements with a four-acid digest) • No geophysical tools, spectrometers or handheld XRF instruments have been used to determine assay results for any elements. • Monitoring of results of blanks, duplicates and standards (inserted at a minimum rate of 1:25) is conducted regularly. QAQC data is reviewed for bias prior to uploading results in the database.
Verification of sampling and assaying	• The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data.	• No drill holes were twinned. • Primary data is collected in the field via laptops in a self-validating data entry form; data verification and storage are accomplished by Iltani contractor and staff personnel. • All drillhole data was compiled in Excel worksheets and imported into Micromine software in order to query 3D data and generate drill plans and cross sections.
Location of data points	• Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. • Quality and adequacy of topographic control.	• Drill hole collar locations are initially set out using a hand held GPS. • At completion of drilling, all drill collars will be accurately surveyed to 50mm by a certified surveyor. • Downhole surveys completed at nominal 30m intervals by driller using a digitally controlled Imdex Gyroscope instrument. • All exploration works are conducted in the GDA94 zone 55 datum. • Topographic control is based on a detailed drone survey and is considered adequate.
Data spacing and distribution	• Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied.	• Drilling was targeted on selected veins and areas of potential stockwork mineralisation. • Drill hole spacing is adequate to report geological and grade continuity. • Sample compositing has been applied outside the zones of logged mineralisation, where 4m sample composites have been utilised. Iltani will resample the 4m composites on a 1m basis should the composites return high-grade assay results

Criteria	JORC Code explanation	Commentary
Orientation of data in relation to geological structure	• Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	• The drill holes were orientated in order to intersect the interpreted mineralisation zones as perpendicular as possible based on information to date. • Due to locally varying intersection angles between drillholes and lithological units all results will be defined as downhole widths. • No drilling orientation and sampling bias has been recognised at this time and it is not considered to have introduced a sampling bias.
Sample security	• The measures taken to ensure sample security.	• Samples were stored in sealed polyweave bags at the drill rig then put on a pallet and transported to Intertek Townsville by using a freight carrying company.
Audits or reviews	• The results of any audits or reviews of sampling techniques and data.	• Internal audits have been carried out on the suitability and quality of sampling techniques and data.

For personal use only

For personal use only

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	• Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. • The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	• Orient is located on EPM 27223. EPM 27223 is wholly owned by Iltani Resources Limited • All leases/tenements are in good standing
Exploration done by other parties	• Acknowledgment and appraisal of exploration by other parties.	• Exploration activities have been carried out (underground mapping, diamond drilling, surface geochemical surveys and surface mapping, pre-feasibility study) by Great Northern Mining Corporation and Mareeba Mining and Exploration over the West and East Orient areas from 1978 to 1989. • Exploration activities have been carried out (soils and rock chip sampling) around Orient West and East by Monto Minerals Limited from 2014 to 2017 • Red River Resources carried out mapping, sampling and geophysical exploration (drone mag survey and IP survey) in 2020 and 2021.
Geology	• Deposit type, geological setting and style of mineralisation.	• Mineralisation occurs in primary vein systems up to 3m wide (controlled by fractures/shears) containing argentiferous galena, cerussite, anglesite, sphalerite, pyrite, marmatite, cassiterite (minor), and stannite (minor) surrounded by a stockwork of lesser veinlets of variable density. • The lead-zinc-silver-indium mineralisation at Orient is believed to represent part of an epithermal precious metals system. The Orient vein and stockwork mineralisation are associated with a strongly faulted and deeply fractured zone near the margin of a major caldera subsidence structure.
Drill hole Information	• A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes, including, easting and northing, elevation or RL, dip and azimuth, down hole length, interception depth and hole length. • If the exclusion of this information is justified the Competent Person should clearly explain why this is	• Iltani Resources has completed at total of 220 RC (Reverse Circulation) drill holes for 42,616m drilled at both Orient East and Orient West and 7 diamond holes for 2009.3m drilled. • Relevant information for recent drill holes is summarised in Table 3, assay results for significant intervals are presented in Tables 4 to 18.

For personal use only

<table>
<tr><th>Criteria</th><th>JORC Code explanation</th><th>Commentary</th></tr>
<tr><td></td><td>the case.</td><td></td></tr>
<tr><td>Data aggregation methods</td><td>• In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.
• Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.
• The assumptions used for any reporting of metal equivalent values should be clearly stated.</td><td>• Iltani are using a 30 g/t Ag Eq. lower cut with no upper cut applied) to report material intersections.
• Metal equivalents are used (silver equivalent)
• The equivalent silver formula is Ag Eq. = Ag + (Pb x 35.5) + (Zn x 50.2) + (In x 0.47)

Metal Equivalent Calculation - Recoveries and Commodity Prices
<table><tr><td>Metal</td><td>Price/Unit</td><td>Recovery</td></tr><tr><td>Silver</td><td>US$20/oz</td><td>87%</td></tr><tr><td>Lead</td><td>US$1.00/lb</td><td>90%</td></tr><tr><td>Zinc</td><td>US$1.50/lb</td><td>85%</td></tr><tr><td>Indium</td><td>US$350/kg</td><td>85%</td></tr></table>
• It is Iltani’s opinion that all the elements included in the metal equivalents calculation have a reasonable potential to be recovered and sold</td></tr>
<tr><td>Relationship between mineralisation widths and intercept lengths</td><td>• These relationships are particularly important in the reporting of Exploration Results.
• If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.
• If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. ‘down hole length, true width not known’).</td><td>• Drilling is generally perpendicular to the structure by angled RC at 50° to 65° into structures dipping between 45° and 80°.</td></tr>
<tr><td>Diagrams</td><td>• Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include but not be limited to a plans and sections.</td><td>• Refer to plans and sections within report</td></tr>
<tr><td>Balanced reporting</td><td>• Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</td><td>• The accompanying document is considered to represent a balanced report</td></tr>
<tr><td>Other substantive exploration data</td><td>• Other exploration data, if meaningful and material, should be reported.</td><td>• All meaningful and material data is reported</td></tr>
<tr><td>Further work</td><td>• The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</td><td>• Exploration of the target area is ongoing.
• Iltani plans to complete further drilling at Orient during 2026.</td></tr>
</table>

Metallurgical Equivalent Calculation – Additional Disclosure

The equivalent silver formula is Ag Eq. = Ag + (Pb x 35.5) + (Zn x 50.2) + (In x 0.47)

Table 19 Metal Equivalent Calculation - Recoveries and Commodity Prices

Metal	Price/Unit	Recovery
Silver	US$20/oz	87%
Lead	US$1.00/lb	90%
Zinc	US$1.50/lb	85%
Indium	US$350/kg	85%

Please refer to the release dated 14 November 2023 (Test Work Confirms Silver-Indium Production Potential) detailing the historical test work which Iltani is using to support the metal equivalent calculation.

The metal equivalent calculation (Ag Eq.) assumes lead and silver will be recovered to a lead concentrate and zinc, silver and indium will be recovered to a zinc concentrate. It is Iltani's opinion that all the elements included in the metal equivalent calculation have a reasonable potential to be recovered and sold.

It should be noted that there are other metals present, notably antimony and tin, which have the potential to be included in the metallurgical equivalent calculation, but at this stage, Iltani has chosen not to do so. These metals will likely also be recovered to the concentrates, notably the lead concentrate, however Iltani is currently assuming that these metals will not be payable, so are excluded from the metallurgical equivalent calculation.

Should this situation change, and the antimony and tin become payable in the lead concentrate and/or metallurgical test work indicates that the antimony or tin can be recovered to a separate concentrate where they are payable, then the metallurgical equivalent calculation could be expanded to include these metals.

For personal use only