For personal use only

# ASX ANNOUNCEMENT

5 November 2026

# FINAL BOORARA DRILL RESULTS SUPPORT HIGHER RESOURCE CONFIDENCE

Maritana Minerals Limited (ASX: MRT) ("Maritana" or "the Company") is pleased to announce positive results from the remaining reverse circulation (RC) drill holes completed at its 100% owned Boorara Gold Project, located 17km east of Kalgoorlie-Boulder in the Western Australian Goldfields. The program has returned results that have increased resource confidence and extended gold mineralisation below the floor of the planned southern open pit which is scheduled to commence mining in mid-2027. The Boorara drilling forms part of the ~60,000m resource conversion campaign across multiple deposits[1].

## HIGHLIGHTS

- In-fill results support resource confidence and future mining activities, with significant results including:
  - **20m @ 7.77 g/t Au** from 100m, incl 2m @ 54.04 g/t Au from 114m (BOORD260054)
  - **19m @ 1.63 g/t Au** from 108m, incl 1m @ 5.25 g/t Au from 115m (BOORD260056)
  - **19m @ 1.32 g/t Au** from 66m, incl 1m @ 6.67 g/t Au from 71m (BOORD260100)
  - **10m @ 1.67 g/t Au** from 30m, incl 1m @ 9.08 g/t Au from 37m (BOORD260119)
- Two drillholes were drilled down plunge / dip to test extensions to mineralisation at depth and to gather information of gold hosting veins and mineralisation. Drillholes are therefore not true width. Better results include:
  - **36m @ 3.53 g/t Au** from 142m, incl 1m @ 62.44 g/t Au from 156m (BOORD260149) (down plunge bottom of Pit 4)
  - **20m @ 1.75 g/t Au** from 34m, incl 2m @ 5.62 g/t Au from 52m (BOORD260149) (down plunge bottom of Pit 4)
  - **12m @ 1.28 g/t Au** from 12m, incl 1m @ 5.09 g/t Au from 15m (BOORD260148) (down dip)
- The results of the final 52 holes of the 119 hole program at Boorara are reported in this announcement[2]
- Boorara is one of the key Life of Mine (LOM)[3] ore sources for the Black Swan Processing Hub "BSPH", with the mining restart targeted for mid-2027
- Results will be incorporated into an updated Boorara Mineral Resource Estimate due in the March 2027 quarter, with further pit optimisation to follow
- Diamond drilling activities for mining assumptions and drill QAQC is planned in the coming months

[1] ASX Announcement *"Maritana Commences Resources Conversion Drilling"* dated 25 June 2026
[2] ASX Announcement "*Boorara Mineralisation Extended Below Planned Pit Supporting Potential Resource Growth*" dated 24 September 2026
[3] ASX Announcement *"Studies Support Standalone Gold Development in WA Goldfields"* dated 17 February 2026

For personal use only

## Managing Director and CEO comment

**Mr Grant Haywood, Managing Director and CEO:**

*"These final results continue to build confidence in Boorara, with the infill drilling better defining the main contact lodes and indicating that gold mineralisation is wider in places than previously understood. Importantly, the down-plunge drilling beneath Pit 4 in the south of the Boorara system confirms mineralisation extends well below the current pit design and remains open at depth.*

*"With the Boorara program now complete, these results will be incorporated into an updated Mineral Resource Estimate and pit optimisation work, supporting Ore Reserve updates and the life-of-mine plan for Maritana. This work is strategically sequenced ahead of the restart of mining at Boorara in mid-2027 and first gold from the BSPH."*

## Resource Definition/Extension Drilling Program and Results

Maritana has safely completed the resource definition and extensional RC drilling program at its flagship Boorara gold project with assay results received and validated for the final 52 drillholes. The infill drilling reported in this announcement is primarily between the recently mined Pits 2 and 4, with follow up extensional drilling to the North of Pit 2 (Figure 1) and down dip of Pit 4.

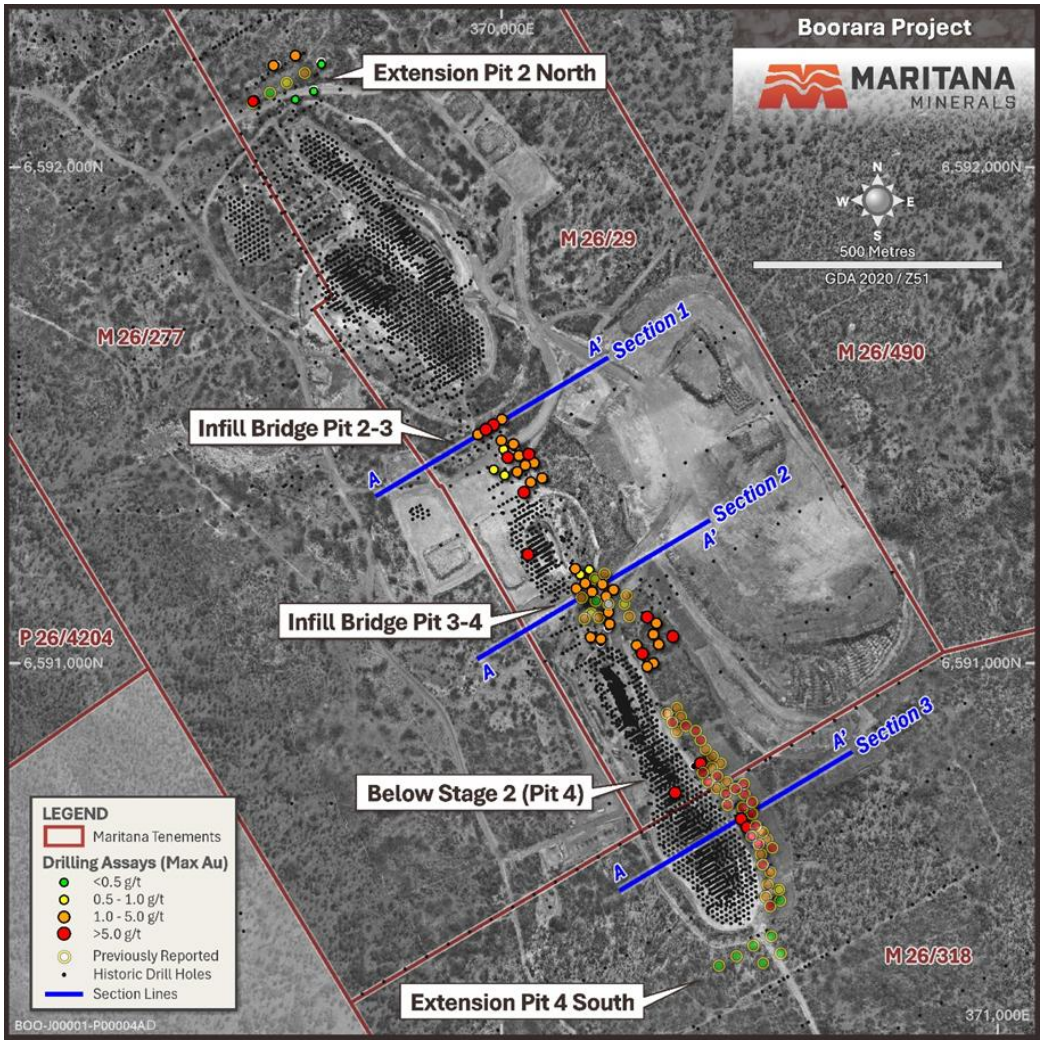



***Figure 1 – Boorara Gold Project drill collar plan showing final 2026 reverse circulation drilling coloured by maximum downhole gold grade, Maritana tenements and the locations of Cross Sections 1 to 3***

For personal use only

Surface drilling was completed on a broad southwest orientation to intersect the vertical contact mineralisation, together with shallower footwall veins and quartz stockwork. Subsequent infill drilling has validated the results from the first phase of drilling[4] by improving the definition of the major contact lodes, better constraining mineralised widths, and increasing resource confidence. In addition, extensional drilling along strike and down dip confirms the continued potential for mineralisation beyond the current resource envelope, with the system remaining open to the north and at depth (Figures 2 – 4).

Maritana also completed two drillholes that were aimed down the plunge and dip of the mineralisation from the bottom of Pit 4 (BOORD260149) and south of Pit 2 (BOORD260148) respectively. Drilling in this orientation was designed to test the orebody's extension further below the bottom of Pit 4 and to obtain important information on gold distribution and vein orientation and density within the mineralised zones and dolerite hosted contact lode. Both of these drillholes are not representative of the true width of the main contact gold lode.

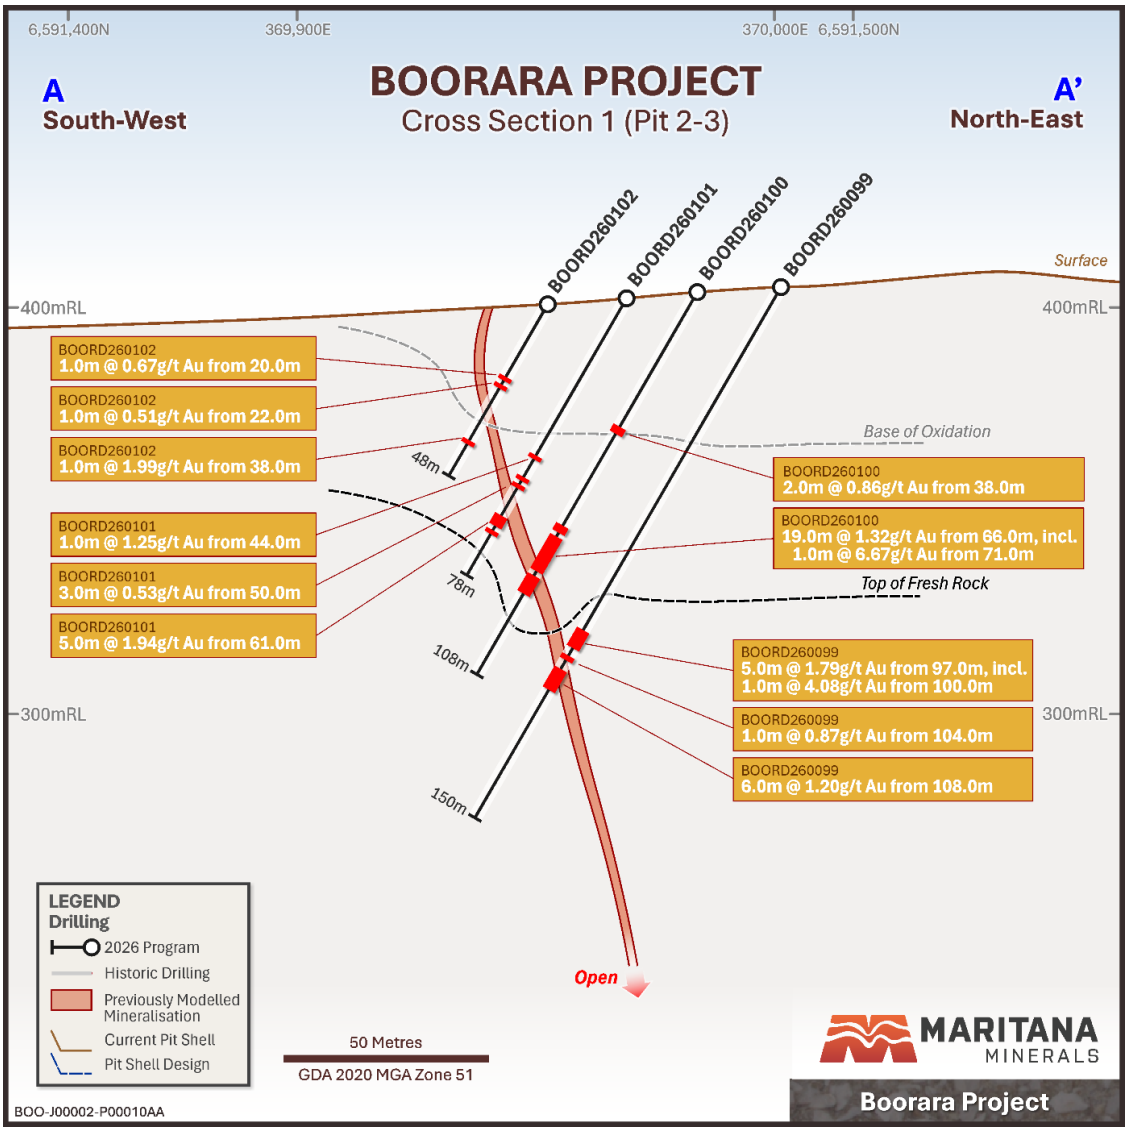



***Figure 2 – Cross Section 1 (Pit 2-3), looking north-east, showing 2026 drill traces and significant intercepts between Pit 2 and Pit 3***

[4] ASX Announcement "*Boorara Mineralisation Extended Below Planned Pit Supporting Potential Resource Growth*" dated 24 September 2026

For personal use only

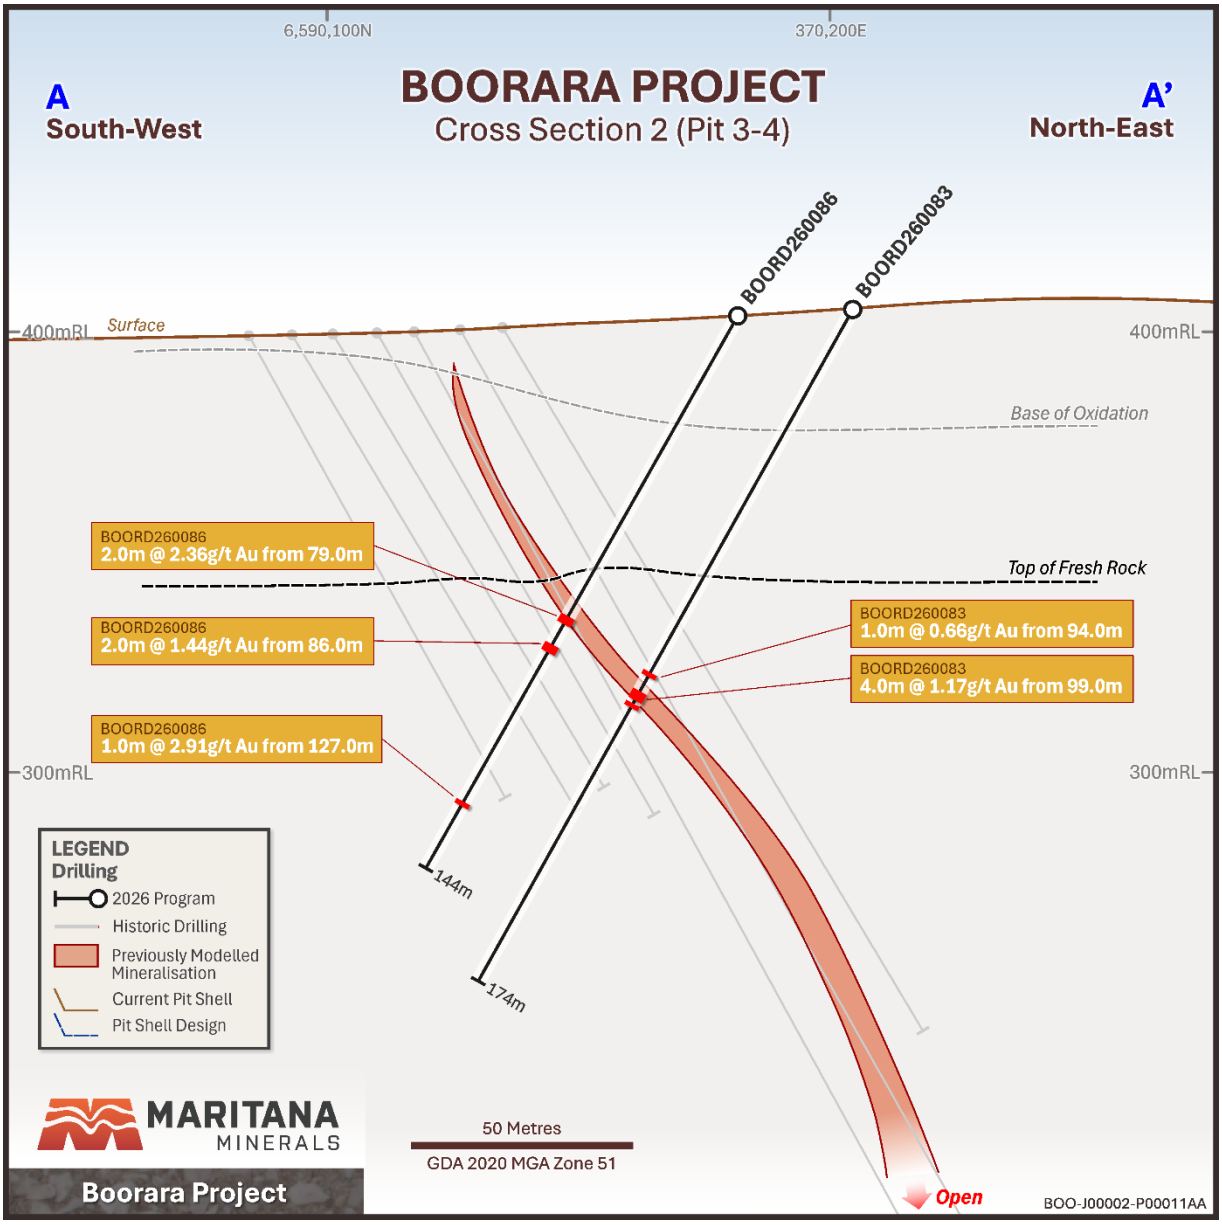



***Figure 3 – Cross Section 2 (Pit 3-4), looking north-east, showing 2026 drill traces and significant intercepts between Pit 3 and Pit 4***

Full results of the significant gold intercepts from the 52 RC drillholes are presented in Table 1. Drill collar coordinate details for the drillholes reported in this announcement are shown in Table 2.

Within cross section 3 (Figure 4), drillholes BOORD260052 and BOORD260053 contain mineralisation at end of hole as both were stopped early due to deteriorating hole conditions and excessive deviation. These two holes are not anticipated to make a material impact to the MRE update. An option to re-drill or re-enter both holes during a future program is being reviewed.

For personal use only

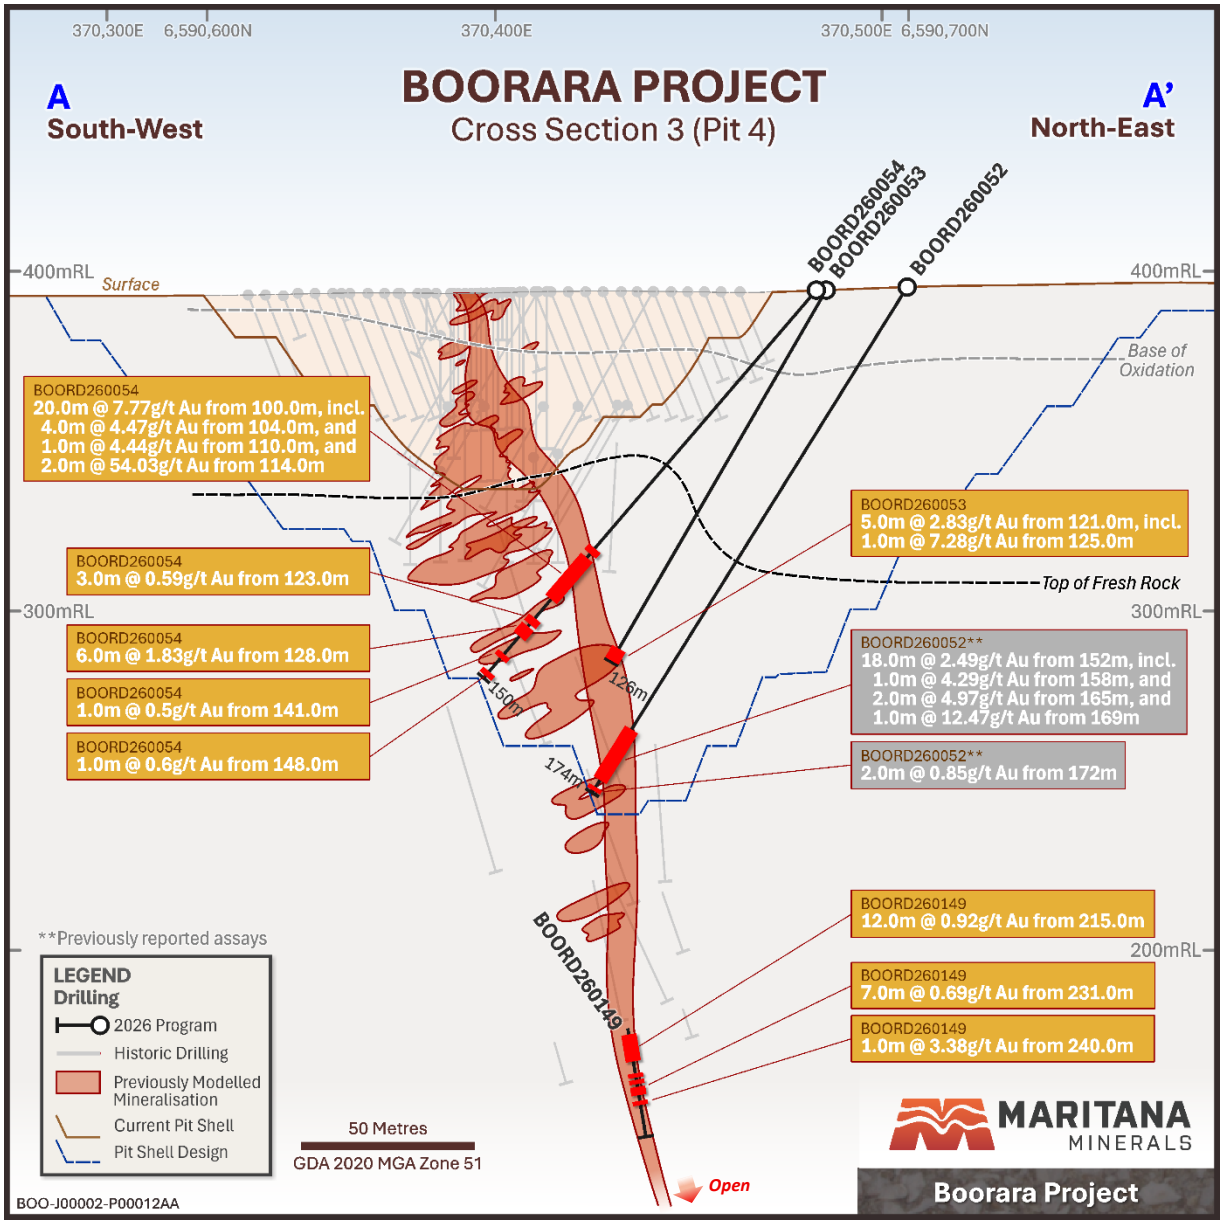



***Figure 4 – Cross Section 3 (Pit 4), showing intercepts in BOORD260052 (** previously reported[5]), BOORD260053, BOORD260054 within the designed pit shell and BOORD260149 approximately 80m below the designed pit shell***

## Overview - Boorara

The Boorara Gold Project lies 17km east of Kalgoorlie-Boulder, approximately 13km East of the Super Pit and approximately 2km southwest of the Nimbus site, where established offices, mains power and water are in place (Figure 5). Mineralisation is reported across three deposits — Royal, Regal and Crown Jewel — over approximately 1.5km of strike, on granted Mining Leases. Gold mineralisation at Boorara is hosted in a typical quartz dolerite comprising a sheeted quartz vein array system with bounding shear zones and late-stage cross faults. Mineralisation occurs as:

- Northwest dipping sheeted and stockwork quartz-carbonate vein arrays within the quartz dolerite host rocks; and

[5] ASX Announcement "*Boorara Mineralisation Extended Below Planned Pit Supporting Potential Resource Growth*" dated 24 September 2026

For personal use only

- Steeply dipping zones along sheared geological contacts trending to the north-northwest.

Mining at Boorara was halted in December 2025 at the conclusion of the previous Ore Purchase Agreement, with the site subsequently transitioning to care and maintenance in preparation for the Black Swan start-up. Preparatory activities, including pre-production planning, site layout, and grade control drilling, are expected to commence ahead of a planned mining restart in mid-2027[6].

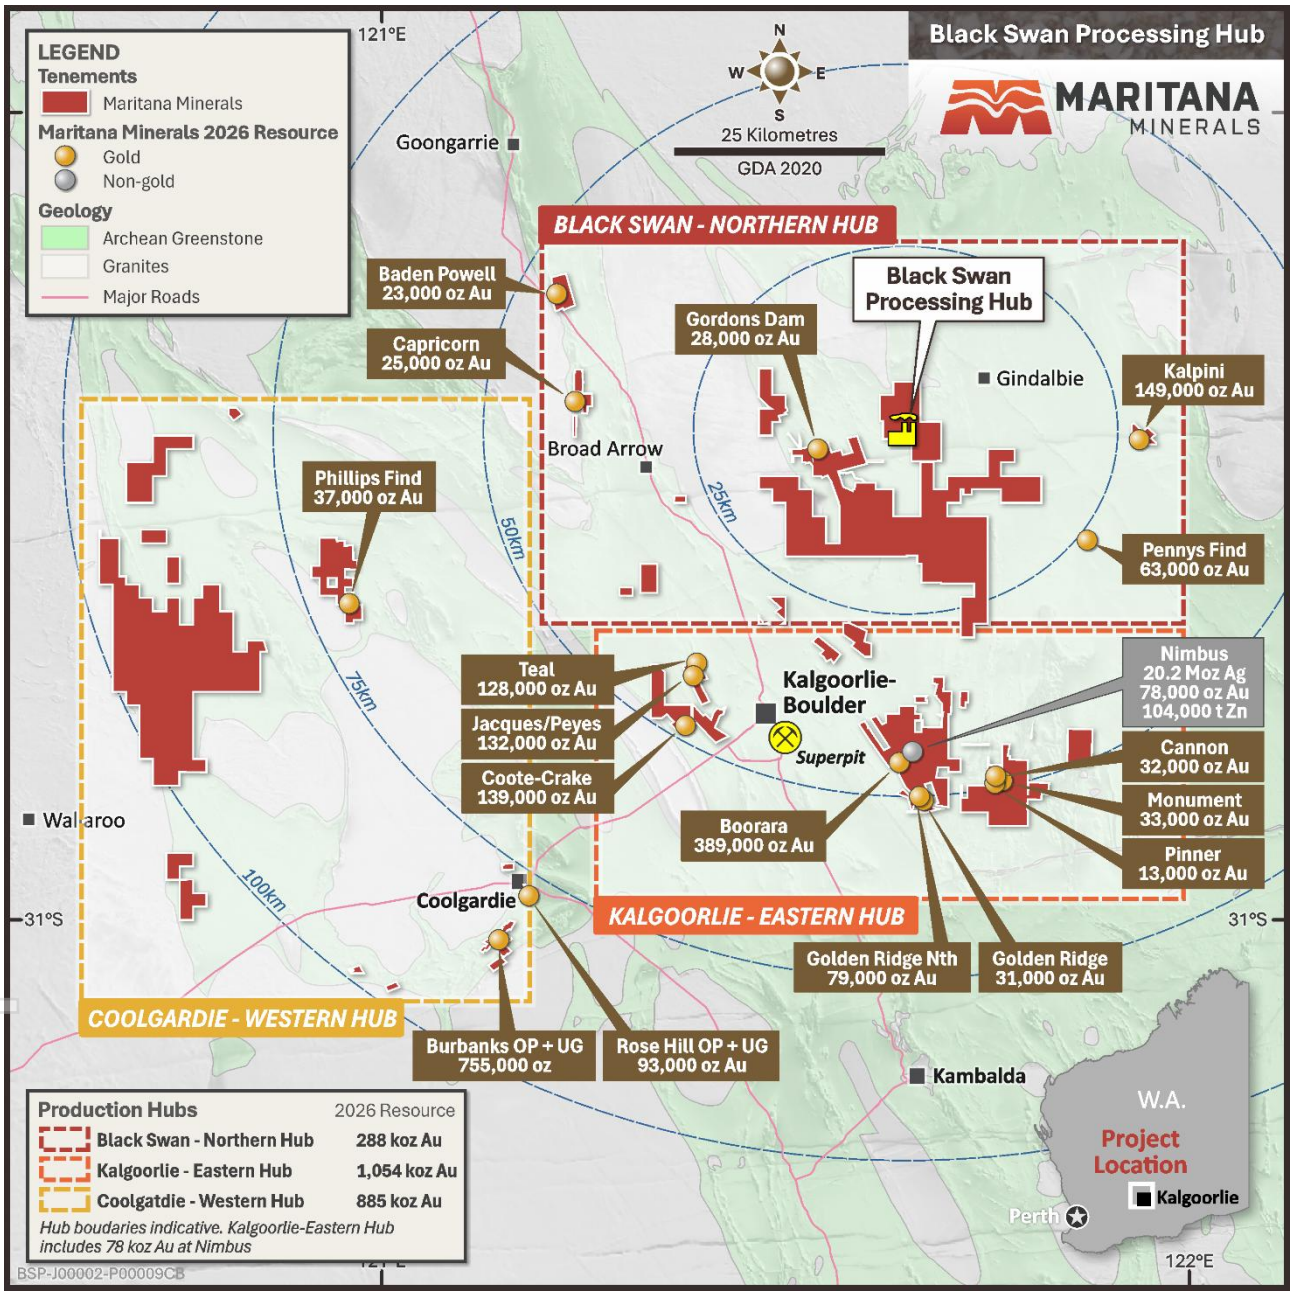



***Figure 5 – Maritana Minerals Production Hub and project locations, regional geology and surrounding infrastructure***

[6] ASX Announcement *"Studies Support Standalone Gold Development in WA Goldfields"* dated 17 February 2026

For personal use only

## Next Steps

The Company has commenced the process of re-interpreting the mineralisation wireframes as a number of drillholes indicate that gold mineralisation is wider than previously understood. Subsequent re-estimation of the Mineral Resource is planned and due for completion during the March quarter 2027. Multi-stage grade control drilling will be designed and completed prior to the re-commencement of open pit ore production in mid-2027.

***Table 1 – Intercepts are down hole and not true width and were calculated based on a sample returning an assay value of greater than or equal to 0.5 g/t Au over an interval no greater than 1.0 m, with no more than 1m of internal dilution. Results rounded to 2 decimal places. Intervals are based on geology and no top cut off was applied. No significant result is represented as NSI in the table. All other assays from the reported drill holes were below the defined cut-off grade of 0.5 g/t Au and are not considered material for public reporting.***

| Hole ID | From | To | Intercept Width | Au g/t |
|---|---|---|---|---|
| BOORD260002 | 63 | 64 | 1 | 0.81 |
| BOORD260002 | 126 | 127 | 1 | 0.57 |
| BOORD260002 | 137 | 138 | 1 | 3.08 |
| BOORD260002 | 194 | 195 | 1 | 11.16 |
| BOORD260004 | 48 | 52 | 4 | 0.69 |
| BOORD260004 | 147 | 148 | 1 | 1.00 |
| BOORD260004 | 151 | 154 | 3 | 1.68 |
| BOORD260004 | 162 | 163 | 1 | 1.76 |
| BOORD260005 | 79 | 80 | 1 | 0.51 |
| BOORD260005 | 83 | 86 | 3 | 0.96 |
| BOORD260005 | 93 | 94 | 1 | 1.04 |
| BOORD260005 | 102 | 103 | 1 | 1.09 |
| BOORD260005 | 118 | 119 | 1 | 0.96 |
| BOORD260005 | 123 | 125 | 2 | 0.73 |
| BOORD260007 | 55 | 58 | 3 | 1.36 |
| BOORD260007 | 60 | 62 | 2 | 0.75 |
| BOORD260007 | 75 | 76 | 1 | 0.84 |
| BOORD260007 | 79 | 81 | 2 | 0.66 |
| BOORD260007 | 86 | 88 | 2 | 0.69 |
| BOORD260007 | 125 | 126 | 1 | 0.52 |
| BOORD260007 | 128 | 129 | 1 | 2.16 |
| BOORD260007 | 131 | 132 | 1 | 0.74 |
| BOORD260007 | 137 | 140 | 3 | 1.27 |
| BOORD260007 | 149 | 153 | 4 | 1.08 |
| BOORD260007 | 160 | 161 | 1 | 3.84 |
| BOORD260007 | 169 | 170 | 1 | 1.06 |
| BOORD260008 | 121 | 122 | 1 | 0.63 |
| BOORD260008 | 151 | 152 | 1 | 0.72 |

For personal use only

| Hole ID | From | To | Intercept Width | Au g/t |
|---|---|---|---|---|
| BOORD260008 | 155 | 157 | 2 | 0.91 |
| BOORD260008 | 162 | 166 | 4 | 0.86 |
| BOORD260008 | 170 | 173 | 3 | 2.24 |
| BOORD260008 | 176 | 178 | 2 | 0.82 |
| BOORD260008 | 187 | 189 | 2 | 1.51 |
| BOORD260008 | 191 | 194 | 3 | 4.47 |
| including | 191 | 192 | 1 | 12.21 |
| BOORD260010 | 29 | 32 | 3 | 0.56 |
| BOORD260010 | 48 | 49 | 1 | 2.64 |
| BOORD260011 | 51 | 52 | 1 | 0.73 |
| BOORD260011 | 56 | 57 | 1 | 1.19 |
| BOORD260011 | 64 | 68 | 4 | 1.65 |
| including | 64 | 65 | 1 | 4.32 |
| BOORD260012 | 94 | 97 | 3 | 1.10 |
| BOORD260012 | 125 | 131 | 6 | 0.72 |
| BOORD260012 | 134 | 143 | 9 | 0.87 |
| BOORD260012 | 145 | 149 | 4 | 0.59 |
| BOORD260012 | 154 | 155 | 1 | 0.76 |
| BOORD260013 | 98 | 101 | 3 | 0.68 |
| BOORD260013 | 106 | 107 | 1 | 1.90 |
| BOORD260013 | 116 | 120 | 4 | 0.92 |
| BOORD260013 | 125 | 126 | 1 | 2.96 |
| BOORD260013 | 130 | 131 | 1 | 2.24 |
| BOORD260014 | 95 | 97 | 2 | 1.24 |
| BOORD260014 | 111 | 114 | 3 | 3.17 |
| including | 113 | 114 | 1 | 5.67 |
| BOORD260014 | 131 | 132 | 1 | 2.68 |
| BOORD260015 | 101 | 104 | 3 | 1.10 |
| BOORD260015 | 112 | 113 | 1 | 0.54 |
| BOORD260015 | 116 | 126 | 10 | 1.35 |
| BOORD260015 | 128 | 129 | 1 | 0.89 |
| BOORD260015 | 141 | 142 | 1 | 0.73 |
| BOORD260016 | 81 | 82 | 1 | 0.65 |
| BOORD260016 | 84 | 90 | 6 | 2.51 |
| BOORD260016 | 98 | 103 | 5 | 1.33 |
| BOORD260036 | 90 | 99 | 9 | 1.33 |

For personal use only

| Hole ID | From | To | Intercept Width | Au g/t |
|---|---|---|---|---|
| including | 95 | 96 | 1 | 5.92 |
| BOORD260036 | 106 | 108 | 2 | 0.76 |
| BOORD260053 | 121 | 126 | 5 | 2.83 |
| including | 125 | 126 | 1 | 7.28 |
| BOORD260054 | 100 | 120 | 20 | 7.77 |
| including | 104 | 108 | 4 | 4.47 |
| and | 110 | 111 | 1 | 4.44 |
| and | 114 | 116 | 2 | 54.03 |
| BOORD260054 | 123 | 126 | 3 | 0.59 |
| BOORD260054 | 128 | 134 | 6 | 1.83 |
| BOORD260054 | 141 | 142 | 1 | 0.50 |
| BOORD260054 | 148 | 149 | 1 | 0.60 |
| BOORD260056 | 12 | 16 | 4 | 1.89 |
| BOORD260056 | 108 | 127 | 19 | 1.63 |
| including | 115 | 116 | 1 | 5.25 |
| BOORD260075 | 60 | 61 | 1 | 0.92 |
| BOORD260075 | 65 | 67 | 2 | 0.60 |
| BOORD260075 | 92 | 93 | 1 | 2.01 |
| BOORD260076 | 85 | 86 | 1 | 0.63 |
| BOORD260079 | 61 | 62 | 1 | 0.55 |
| BOORD260082 | 80 | 81 | 1 | 3.16 |
| BOORD260083 | 94 | 95 | 1 | 0.66 |
| BOORD260083 | 99 | 103 | 4 | 1.17 |
| BOORD260084 | 40 | 41 | 1 | 0.56 |
| BOORD260084 | 46 | 47 | 1 | 0.95 |
| BOORD260084 | 49 | 51 | 2 | 1.58 |
| BOORD260084 | 59 | 61 | 2 | 0.62 |
| BOORD260084 | 72 | 76 | 4 | 0.59 |
| BOORD260084 | 81 | 82 | 1 | 0.91 |
| BOORD260085 | 114 | 117 | 3 | 0.89 |
| BOORD260085 | 119 | 120 | 1 | 1.41 |
| BOORD260085 | 122 | 123 | 1 | 0.62 |
| BOORD260086 | 79 | 81 | 2 | 2.36 |
| BOORD260086 | 86 | 88 | 2 | 1.44 |
| BOORD260086 | 127 | 128 | 1 | 2.91 |
| BOORD260088 | 118 | 119 | 1 | 1.06 |

For personal use only

| Hole ID | From | To | Intercept Width | Au g/t |
|---|---|---|---|---|
| BOORD260092 | 84 | 85 | 1 | 0.61 |
| BOORD260092 | 96 | 98 | 2 | 0.81 |
| BOORD260099 | 97 | 102 | 5 | 1.79 |
| including | 100 | 101 | 1 | 4.08 |
| BOORD260099 | 104 | 105 | 1 | 0.87 |
| BOORD260099 | 108 | 114 | 6 | 1.20 |
| BOORD260100 | 38 | 40 | 2 | 0.86 |
| BOORD260100 | 66 | 85 | 19 | 1.32 |
| including | 71 | 72 | 1 | 6.67 |
| BOORD260101 | 44 | 45 | 1 | 1.25 |
| BOORD260101 | 50 | 53 | 3 | 0.53 |
| BOORD260101 | 61 | 66 | 5 | 1.94 |
| BOORD260102 | 20 | 21 | 1 | 0.67 |
| BOORD260102 | 22 | 23 | 1 | 0.51 |
| BOORD260102 | 38 | 39 | 1 | 1.99 |
| BOORD260103 | 72 | 73 | 1 | 0.82 |
| BOORD260103 | 81 | 83 | 2 | 0.92 |
| BOORD260104 | 71 | 74 | 3 | 0.68 |
| BOORD260104 | 81 | 83 | 2 | 1.09 |
| BOORD260104 | 98 | 101 | 3 | 0.92 |
| BOORD260105 | 95 | 102 | 7 | 0.88 |
| BOORD260105 | 107 | 108 | 1 | 1.11 |
| BOORD260105 | 112 | 117 | 5 | 0.91 |
| BOORD260105 | 119 | 120 | 1 | 0.54 |
| BOORD260105 | 123 | 130 | 7 | 1.89 |
| BOORD260106 | 44 | 45 | 1 | 0.52 |
| BOORD260107 | 78 | 79 | 1 | 0.58 |
| BOORD260107 | 81 | 84 | 3 | 1.70 |
| BOORD260107 | 86 | 89 | 3 | 0.94 |
| BOORD260107 | 91 | 94 | 3 | 1.34 |
| BOORD260107 | 101 | 108 | 7 | 1.68 |
| BOORD260108 | 44 | 46 | 2 | 12.09 |
| BOORD260109 | 71 | 72 | 1 | 0.72 |
| BOORD260109 | 105 | 108 | 3 | 2.23 |
| including | 107 | 108 | 1 | 4.83 |
| BOORD260109 | 111 | 112 | 1 | 0.78 |

For personal use only

| Hole ID | From | To | Intercept Width | Au g/t |
|---|---|---|---|---|
| BOORD260109 | 122 | 124 | 2 | 0.57 |
| BOORD260110 | 56 | 57 | 1 | 0.50 |
| BOORD260110 | 58 | 60 | 2 | 0.56 |
| BOORD260110 | 92 | 93 | 1 | 3.44 |
| BOORD260110 | 96 | 98 | 2 | 0.90 |
| BOORD260110 | 100 | 105 | 5 | 0.93 |
| BOORD260110 | 124 | 125 | 1 | 0.85 |
| BOORD260111 | 0 | 1 | 1 | 0.79 |
| BOORD260111 | 3 | 4 | 1 | 0.60 |
| BOORD260112 | 42 | 43 | 1 | 0.54 |
| BOORD260112 | 49 | 51 | 2 | 1.19 |
| BOORD260112 | 53 | 55 | 2 | 0.58 |
| BOORD260112 | 58 | 63 | 5 | 2.22 |
| including | 60 | 61 | 1 | 4.99 |
| BOORD260112 | 74 | 76 | 2 | 0.94 |
| BOORD260113 | 13 | 15 | 2 | 0.75 |
| BOORD260114 | 69 | 70 | 1 | 0.78 |
| BOORD260114 | 135 | 137 | 2 | 3.31 |
| BOORD260114 | 150 | 152 | 2 | 0.88 |
| BOORD260114 | 155 | 156 | 1 | 1.59 |
| BOORD260114 | 159 | 160 | 1 | 0.96 |
| BOORD260116 | 50 | 54 | 4 | 0.54 |
| BOORD260116 | 57 | 58 | 1 | 0.81 |
| BOORD260116 | 66 | 76 | 10 | 0.77 |
| BOORD260116 | 78 | 83 | 5 | 1.45 |
| BOORD260116 | 99 | 101 | 2 | 1.46 |
| BOORD260116 | 104 | 106 | 2 | 1.72 |
| BOORD260116 | 114 | 116 | 2 | 0.70 |
| BOORD260116 | 121 | 122 | 1 | 0.51 |
| BOORD260116 | 124 | 126 | 2 | 1.96 |
| BOORD260119 | 30 | 40 | 10 | 1.67 |
| including | 37 | 38 | 1 | 9.08 |
| BOORD260119 | 54 | 55 | 1 | 0.93 |
| BOORD260119 | 65 | 66 | 1 | 10.75 |
| BOORD260119 | 74 | 75 | 1 | 0.57 |
| BOORD260119 | 84 | 85 | 1 | 14.21 |

For personal use only

| Hole ID | From | To | Intercept Width | Au g/t |
|---|---|---|---|---|
| BOORD260119 | 88 | 89 | 1 | 0.90 |
| BOORD260134 | 37 | 38 | 1 | 0.91 |
| BOORD260134 | 53 | 54 | 1 | 2.92 |
| BOORD260134 | 58 | 59 | 1 | 0.64 |
| BOORD260134 | 87 | 88 | 1 | 0.53 |
| BOORD260135 | 5 | 6 | 1 | 0.88 |
| BOORD260135 | 79 | 80 | 1 | 1.59 |
| BOORD260140 | NSI | | | |
| BOORD260142 | NSI | | | |
| BOORD260148 | 12 | 24 | 12 | 1.28 |
| including | 15 | 16 | 1 | 5.09 |
| BOORD260148 | 27 | 30 | 3 | 1.10 |
| BOORD260148 | 33 | 38 | 5 | 1.60 |
| BOORD260148 | 44 | 46 | 2 | 0.96 |
| BOORD260148 | 48 | 49 | 1 | 0.71 |
| BOORD260148 | 51 | 52 | 1 | 1.06 |
| BOORD260148 | 55 | 57 | 2 | 0.90 |
| BOORD260148 | 59 | 60 | 1 | 2.16 |
| BOORD260148 | 75 | 76 | 1 | 0.86 |
| BOORD260148 | 79 | 80 | 1 | 1.48 |
| BOORD260148 | 88 | 89 | 1 | 0.57 |
| BOORD260148 | 93 | 96 | 3 | 0.53 |
| BOORD260148 | 98 | 101 | 3 | 1.05 |
| BOORD260149 | 4 | 5 | 1 | 0.55 |
| BOORD260149 | 34 | 54 | 20 | 1.75 |
| including | 52 | 54 | 2 | 5.62 |
| BOORD260149 | 60 | 86 | 26 | 1.01 |
| | | | | |
| BOORD260149 | 89 | 94 | 5 | 1.93 |
| including | 92 | 93 | 1 | 5.26 |
| BOORD260149 | 100 | 101 | 1 | 0.79 |
| BOORD260149 | 106 | 111 | 5 | 1.44 |
| BOORD260149 | 113 | 125 | 12 | 1.71 |
| BOORD260149 | 128 | 131 | 3 | 0.66 |
| BOORD260149 | 138 | 139 | 1 | 0.58 |
| BOORD260149 | 142 | 178 | 36 | 3.53 |

For personal use only

| Hole ID | From | To | Intercept Width | Au g/t |
|---|---|---|---|---|
| including | 156 | 157 | 1 | 62.44 |
| and | 159 | 160 | 1 | 7.40 |
| and | 161 | 162 | 1 | 4.51 |
| BOORD260149 | 186 | 187 | 1 | 1.83 |
| BOORD260149 | 191 | 192 | 1 | 0.56 |
| BOORD260149 | 194 | 195 | 1 | 0.64 |
| BOORD260149 | 199 | 204 | 5 | 1.34 |
| BOORD260149 | 207 | 210 | 3 | 0.94 |
| BOORD260149 | 215 | 227 | 12 | 0.92 |
| BOORD260149 | 231 | 238 | 7 | 0.69 |
| BOORD260149 | 240 | 241 | 1 | 3.38 |
| BOORD260150 | 15 | 17 | 2 | 0.84 |
| BOORD260150 | 113 | 114 | 1 | 0.81 |
| BOORD260150 | 119 | 120 | 1 | 1.46 |
| BOORD260150 | 130 | 136 | 6 | 2.19 |
| including | 135 | 136 | 1 | 4.13 |
| BOORD260150 | 138 | 139 | 1 | 5.93 |
| | | | | |
| BOORD260151 | NSI | | | |

***Table 2 – Collar location details of reported RC resource definition drillholes at Boorara, in MGA2020, Zone 51***

| Hole Id | MGA2020 East (m) | MGA2020 North (m) | RL(m) | Azi | Dip | EOH (m) | Tenement ID |
|---|---|---|---|---|---|---|---|
| BOORD260002 | 370293 | 6591093 | 402 | 240 | -60 | 206 | M 26/29 |
| BOORD260004 | 370312 | 6591081 | 402 | 240 | -60 | 192 | M 26/29 |
| BOORD260005 | 370218 | 6591079 | 402 | 238 | -60 | 126 | M 26/29 |
| BOORD260007 | 370306 | 6591058 | 403 | 240 | -60 | 174 | M 26/29 |
| BOORD260008 | 370345 | 6591054 | 402 | 240 | -60 | 252 | M 26/29 |
| BOORD260010 | 370179 | 6591052 | 402 | 239 | -61 | 72 | M 26/29 |
| BOORD260011 | 370200 | 6591049 | 402 | 240 | -60 | 84 | M 26/29 |
| BOORD260012 | 370316 | 6591038 | 403 | 241 | -59 | 204 | M 26/29 |
| BOORD260013 | 370272 | 6591036 | 403 | 241 | -60 | 138 | M 26/29 |
| BOORD260014 | 370283 | 6591020 | 404 | 240 | -61 | 168 | M 26/29 |
| BOORD260015 | 370306 | 6591000 | 406 | 240 | -60 | 174 | M 26/29 |
| BOORD260016 | 370293 | 6590993 | 406 | 241 | -50 | 138 | M 26/29 |
| BOORD260036 | 370401 | 6590798 | 399 | 240 | -60 | 150 | M 26/29 |

For personal use only

| Hole Id | MGA2020 East (m) | MGA2020 North (m) | RL(m) | Azi | Dip | EOH (m) | Tenement ID |
|---|---|---|---|---|---|---|---|
| BOORD260053 | 370485 | 6590688 | 394 | 240 | -60 | 126 | M 26/318 |
| BOORD260054 | 370483 | 6590686 | 394 | 238 | -50 | 150 | M 26/318 |
| BOORD260056 | 370495 | 6590670 | 394 | 240 | -50 | 132 | M 26/318 |
| BOORD260075 | 370148 | 6591191 | 406 | 240 | -60 | 120 | M 26/29 |
| BOORD260076 | 370177 | 6591189 | 407 | 240 | -60 | 138 | M 26/29 |
| BOORD260079 | 370158 | 6591179 | 405 | 239 | -60 | 108 | M 26/29 |
| BOORD260082 | 370169 | 6591161 | 404 | 240 | -60 | 120 | M 26/29 |
| BOORD260083 | 370203 | 6591159 | 405 | 240 | -60 | 174 | M 26/29 |
| BOORD260084 | 370150 | 6591150 | 404 | 240 | -60 | 84 | M 26/29 |
| BOORD260085 | 370225 | 6591148 | 405 | 240 | -60 | 174 | M 26/29 |
| BOORD260086 | 370182 | 6591144 | 404 | 239 | -60 | 144 | M 26/29 |
| BOORD260088 | 370210 | 6591135 | 404 | 241 | -60 | 174 | M 26/29 |
| BOORD260092 | 370215 | 6591103 | 403 | 239 | -60 | 126 | M 26/29 |
| BOORD260099 | 370000 | 6591492 | 405 | 240 | -60 | 150 | M 26/29 |
| BOORD260100 | 369983 | 6591481 | 404 | 240 | -60 | 108 | M 26/29 |
| BOORD260101 | 369968 | 6591471 | 402 | 240 | -60 | 78 | M 26/29 |
| BOORD260102 | 369952 | 6591461 | 400 | 240 | -60 | 48 | M 26/29 |
| BOORD260103 | 370000 | 6591448 | 402 | 240 | -60 | 102 | M 26/29 |
| BOORD260104 | 370024 | 6591442 | 401 | 237 | -60 | 102 | M 26/29 |
| BOORD260105 | 370055 | 6591422 | 400 | 239 | -60 | 132 | M 26/29 |
| BOORD260106 | 370004 | 6591431 | 400 | 238 | -60 | 102 | M 26/29 |
| BOORD260107 | 370035 | 6591418 | 399 | 238 | -61 | 108 | M 26/29 |
| BOORD260108 | 370012 | 6591415 | 399 | 240 | -60 | 102 | M 26/29 |
| BOORD260109 | 370065 | 6591404 | 401 | 240 | -60 | 150 | M 26/29 |
| BOORD260110 | 370048 | 6591399 | 400 | 240 | -60 | 126 | M 26/29 |
| BOORD260111 | 369984 | 6591390 | 398 | 239 | -60 | 48 | M 26/29 |
| BOORD260112 | 370031 | 6591386 | 399 | 238 | -61 | 102 | M 26/29 |
| BOORD260113 | 370006 | 6591379 | 398 | 239 | -60 | 48 | M 26/29 |
| BOORD260114 | 370082 | 6591373 | 403 | 241 | -60 | 168 | M 26/29 |
| BOORD260116 | 370059 | 6591365 | 401 | 240 | -60 | 126 | M 26/29 |
| BOORD260119 | 370045 | 6591345 | 400 | 240 | -60 | 96 | M 26/29 |
| BOORD260134 | 369584 | 6592225 | 400 | 241 | -60 | 102 | M 26/29 |
| BOORD260135 | 369540 | 6592205 | 399 | 240 | -60 | 102 | M 26/29 |
| BOORD260140 | 369621 | 6592153 | 397 | 240 | -60 | 102 | M 26/29 |
| BOORD260142 | 369584 | 6592136 | 396 | 240 | -60 | 102 | M 26/29 |
| BOORD260148 | 370053 | 6591219 | 400 | 80 | -60 | 108 | M 26/29 |

| Hole Id | MGA2020 East (m) | MGA2020 North (m) | RL(m) | Azi | Dip | EOH (m) | Tenement ID |
|---|---|---|---|---|---|---|---|
| BOORD260149 | 370349 | 6590739 | 365 | 129 | -60 | 252 | M 26/29 |
| BOORD260150 | 369499 | 6592133 | 397 | 60 | -60 | 162 | M 26/29 |
| BOORD260151 | 369637 | 6592207 | 398 | 240 | -60 | 126 | M 26/29 |

## Competent Person Statement — Exploration Results

The information in this announcement that relates to exploration results, geology and data compilation is based on, and fairly represents, information and supporting documentation compiled under the supervision and review of Mr Stephen Guy, a Competent Person who is a Member of The Australian Institute of Geoscientists (8203). Mr Guy is the Chief Geologist for Maritana Minerals, is a full-time employee of the Company and holds shares and options in the Company. Mr Guy has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Guy consents to the inclusion in this announcement of the matters based on this information in the form and context in which it appears.

## Compliance Statement — Previously Reported Information

The information in this announcement that relates to the Boorara Mineral Resource Estimate and Ore Reserve is extracted from the ASX announcement titled "*Annual Mineral Resources and Reserves Statement*" dated 20 August 2026, which is available at www.asx.com.au. . The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and that all material assumptions and technical parameters underpinning the estimates in that announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

The information in this announcement that relates to previously reported exploration results is extracted from the ASX announcement titled "Boorara Mineralisation Extended Below Planned Pit Supporting Potential Resource Growth" dated 24 September 2026, which is available at www.asx.com.au. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

The information in this announcement that relates to the Boorara Life of Mine plan and the targeted mid-2027 mining restart is extracted from the ASX announcement titled "Studies Support Standalone Gold Development in WA Goldfields" dated 17 February 2026. The Company confirms that all material assumptions underpinning the production targets and forecast financial information derived from the production targets in that announcement continue to apply and have not materially changed.

Authorised for release by the Board of Directors.

For further information, please contact:

**Grant Haywood**
**Managing Director and CEO**
grant.haywood@maritanaminerals.com.au
+61 8 9386 9534

**Michael Vaughan**
**Investor and Media Relations – Fivemark**
michael.vaughan@fivemark.com.au
+61 422 602 720

For personal use only

For personal use only

## JOIN MARITANA MINERALS INTERACTIVE HUB

Visit https://maritanaminerals.com.au/auth/signup for Maritana Minerals' Interactive InvestorHub

**MARITANA MINERALS**
Email: info@maritanaminerals.com.au

## Forward Looking and Cautionary Statements

Some statements in this report regarding estimates or future events are forward looking statements. They include indications of, and guidance on, future earnings, cash flow, costs and financial performance. Forward looking statements include, but are not limited to, statements preceded by words such as "planned", "expected", "projected", "estimated", "may", "scheduled", "intends", "anticipates", "believes", "potential", "could", "nominal", "conceptual" and similar expressions. Forward looking statements, opinions and estimates included in this announcement are based on assumptions and contingencies which are subject to change without notice, as are statements about market and industry trends, which are based on interpretations of current market conditions. Forward looking statements are provided as a general guide only and should not be relied on as a guarantee of future performance. Forward looking statements may be affected by a range of variables that could cause actual results to differ from estimated results, and may cause the Company's actual performance and financial results in future periods to materially differ from any projections of future performance or results expressed or implied by such forward looking statements. These risks and uncertainties include but are not limited to liabilities inherent in mine development and production, geological, mining and processing technical problems, the inability to obtain any additional mine licences, permits and other regulatory approvals required in connection with mining and third party processing operations, competition for among other things, capital, acquisition of reserves, undeveloped lands and skilled personnel, incorrect assessments of the value of acquisitions, changes in commodity prices and exchange rate, currency and interest fluctuations, various events which could disrupt operations and/or the transportation of mineral products, including labour stoppages and severe weather conditions, the demand for and availability of transportation services, the ability to secure adequate financing and management's ability to anticipate and manage the foregoing factors and risks. There can be no assurance that forward looking statements will prove to be correct.

Statements regarding plans with respect to the Company's mineral properties may contain forward looking statements in relation to future matters that can only be made where the Company has a reasonable basis for making those statements.

This announcement has been prepared in compliance with the JORC Code (2012) and the current ASX Listing Rules.

The Company believes that it has a reasonable basis for making the forward looking statements in the announcement, including with respect to any production targets and financial estimates, based on the information contained in this and previous ASX announcements.

For personal use only

## Appendix 1 – JORC Code (2012) Table 1, Section 1

*The following Table and Sections are provided to ensure compliance with the JORC Code (2012 edition) guidelines for the reporting Exploration Results.*

**SECTION 1 Sampling Techniques and Data**
**Boorara Project**
**(Criteria in this section apply to all succeeding sections)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| **Sampling techniques** | Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. | Sampling was conducted using truck mounted Austex X350 Reverse Circulation (RC) drilling rig from surface.<br><br>For RC drilling, samples were collected as both 4 m composites and 1 m splits using a cyclone and cone splitter to obtain ~2-3 kg representative samples. |
| | Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. | RC samples were collected at 1 m intervals directly from a cyclone and cone splitter mounted on the rig. 1 m samples were collected when logging identified key host lithologies, quartz veining and other key geological observations directly related to gold mineralisation. 4 m composite samples were collected from the 1 m spoil piles for the remainder of the drill hole.<br><br>The cyclone and splitter were cleaned regularly to minimise contamination. |

For personal use only

**SECTION 1 Sampling Techniques and Data**
**Boorara Project**
**(Criteria in this section apply to all succeeding sections)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| | Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information. | Field duplicates, QAQC certified reference standards and blanks were collected/inserted at a rate of 1 in every 20 m (maximum) through pre-determined mineralised zones.<br><br>All samples were crushed and split to produce a 500 g jar of material for Photon Assay Analysis.<br><br>Sampling and QAQC procedures are carried out using Maritana protocols consistent with industry best practice. |
| **Drilling Techniques** | Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). | RC drilling was carried out using a face sampling hammer with a 127mm (5") drill bit. |

For personal use only

**SECTION 1 Sampling Techniques and Data**
**Boorara Project**
**(Criteria in this section apply to all succeeding sections)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| **Drill sample recovery** | Method of recording and assessing core and chip sample recoveries and results assessed. | Sample recoveries for RC are visually estimated qualitatively on a metre basis and recorded in the database. |
| | Measures taken to maximise sample recovery and ensure representative nature of the samples. | Drilling contractors adjust their drilling approach to specific conditions to maximise sample recovery.<br><br>RC samples are visually assessed for recovery and moisture. A cyclone and cone splitter were used to provide uniform sized samples. |
| | Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. | No sample recovery issues have affected potential sample bias. |
| **Logging** | Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. | All drilled intervals (RC) are logged and recorded.<br><br>Data for RC drilling was recorded as regolith, lithology, veining, fabric (structure), grain size, colour, sulphide presence, alteration and oxidation state, where possible to observe.<br><br>Maritana considers the data to be of an appropriate level of detail to support future resource estimations. |

For personal use only

**SECTION 1 Sampling Techniques and Data**
**Boorara Project**
**(Criteria in this section apply to all succeeding sections)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| | Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. | Logging is both qualitative and quantitative in nature depending on the field being logged.<br><br>All intervals/chip trays photographed.<br><br>RC chips trays are stored at the Company's core yard on-site at Boorara. |
| | The total length and percentage of the relevant intersections logged. | All drillholes are logged in full. |
| **Sub-sampling techniques and sample preparation** | If core, whether cut or sawn and whether quarter, half or all core taken. | No diamond drilling was undertaken during the drill program. |
| | If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. | All RC samples were passed through a cyclone and cone splitter, and a 2-3 kg split sample is collected for each 1 m interval. A 4m composite sample was also collected. |

For personal use only

**SECTION 1 Sampling Techniques and Data**
**Boorara Project**
**(Criteria in this section apply to all succeeding sections)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| | | The 4 m composite samples when collected were sent to Intertek to be dried and crushed to 2 mm before a 500 g split was taken for Photon Assay Analysis.<br><br>1 m split samples were collected for analysis from selected zones based on field logging and >0.3 g/t Au returned assay from the 4 m composite sample. All other zones within the RC were sampled by collecting the 4 m composite sample. |
| | For all sample types, the nature, quality and appropriateness of the sample preparation technique. | The sample, type and size, is considered appropriate for this type and style of mineralisation. |
| | Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. | MRT QA/QC controls during the analysis process include duplicates for reproducibility, blank samples for contamination and standards for bias.<br><br>The laboratories used have generally demonstrated analytical accuracy at an acceptable level within 95% confidence limits.<br><br>Laboratories also employ their own internal QA/QC protocols. |
| | Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. | Field duplicate samples were taken by Maritana Minerals Ltd. every 20 m and submitted with their 1 m primary samples. |

personal use only

**SECTION 1 Sampling Techniques and Data**
**Boorara Project**
**(Criteria in this section apply to all succeeding sections)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| | Whether sample sizes are appropriate to the grain size of the material being sampled. | The sample size is considered appropriate for this type and style of mineralisation |
| **Quality of assay data and laboratory tests** | The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. | RC samples were sent to Intertek Laboratories for analysis. A 500 g sample is assayed for gold by Photon Assay Analysis (method PAAU02, upper limit 350 ppm) along with quality control samples including certified reference material, blanks and duplicates. Photon method PAAU02H (upper limit 3500ppm Au) and PAAU02HH (absolute Au) were used for samples of very high grade.<br><br>No SG measurements have been collected as the drill sample return consists of drill chips, insufficient for accurate density measurements. |
| | For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. | No pXRF (Portable XRF) instrument has been used at Boorara to quantitatively determine gold grades of logged intervals. |
| | Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. | MRT QA/QC controls during the analysis process include duplicates for reproducibility, blank samples for contamination and standards for bias.<br><br>The laboratories used have generally demonstrated analytical accuracy at an acceptable level within 95% confidence limits. |

For personal use only

**SECTION 1 Sampling Techniques and Data**
**Boorara Project**
**(Criteria in this section apply to all succeeding sections)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| **Verification of sampling and assaying** | The verification of significant intersections by either independent or alternative company personnel. | All drilling and significant intersections are verified and signed off by the Chief Geologist for Maritana Minerals who is also a Competent Person. |
| | The use of twinned holes. | No pre-determined twin holes were drilled during this program. |
| | Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. | Geological logging was originally captured on formatted Excel templates, then sent to the company's in-house database manager for uploading into the company database utilising Geobank v26.0.761.3 software. Logging and upload incorporates routine data validation for missing data, out of range data and referential integrity.<br><br>Laboratory assay and downhole survey data is captured electronically.<br><br>Uploaded data is reviewed and verified by the geologist responsible for the data collection. |
| | Discuss any adjustment to assay data. | No adjustments or calibrations were made to the assay data reported. |

personal use only

**SECTION 1 Sampling Techniques and Data**
**Boorara Project**
**(Criteria in this section apply to all succeeding sections)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| **Location of data points** | Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. | Drill hole collar locations prior to drilling were positioned with a hand-held GPS.<br><br>Systematically throughout, and on completion of the program and for any Mineral Resource Estimation the collar locations will be surveyed by a qualified surveyor using sophisticated DGPS with a nominal accuracy of +/- 0.05 m for north, east and RL (elevation).<br><br>The drilling rig was sited using a compass, and a rig aligner used once in position to orient the azimuth and dip prior to collaring the hole.<br><br>All RC drillholes were down-hole surveyed using an IMDEX North-Seeking Gyro System. A single shot survey was completed every 18 m during the drilling of a hole. |
| | Specification of the grid system used. | The grid system used to capture the data is MGA_2020 Zone 51. |
| | Quality and adequacy of topographic control. | Topographic control has been established using contours generated from aerial photography and elevation models. Drill collar positions, including elevation, are surveyed using Differential GPS (DGPS), providing high-accuracy location data at the completion of the drillhole and drill program. |

For personal use only

**SECTION 1 Sampling Techniques and Data**
**Boorara Project**
**(Criteria in this section apply to all succeeding sections)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| **Data spacing and distribution** | Data spacing for reporting of Exploration Results. | Resource infill drillholes were located on a nominal 20 m by 20 m spacing along strike and down dip from previous drillholes. Extensional drillholes along strike are located on a nominal 40 m by 40 m spacing. |
| | Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. | The current drilling program is designed to infill existing data spacing in order to improve confidence in the geological interpretation and grade continuity. The additional data will provide greater certainty in support of an update to the existing Mineral Resource Estimate (MRE). While the drilling density is expected to be sufficient to establish geological and grade continuity for the targeted classification, final confidence levels will be determined during the resource estimation process. |
| | Whether sample compositing has been applied. | Drilling through lithologies confidently known to not host mineralisation and without any observable features of quartz veins or presence of sulphides were sampled as a 4 m composite. The 4 m composites were collected by sampling with an aluminium hand scoop through each sample interval and combined for a 4m composite which was submitted to the laboratory for analysis. Where results from the composite recorded anomalous Au values, the interval was re-analysed using the 1 m samples.<br>Within the host lithology (dolerite) and where observable indicators of mineralisation were observed, samples were not composited and collected on a standard 1 m interval.<br>Table 1 reporting significant intersections, uses length weighting of gold grades. |

For personal use only

**SECTION 1 Sampling Techniques and Data**
**Boorara Project**

**(Criteria in this section apply to all succeeding sections)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| **Orientation of data in relation to geological structure** | Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. | Drilling was oriented nominally perpendicular to the strike of mineralisation to achieve unbiased sampling of structural and lithological features. However, due to the vertical nature of the mineralisation and site access restrictions, many, but not all, intersections are oblique to the true orientation of the mineralisation. |
| | If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. | Due to the vertical orientation of the mineralisation and restrictions on collar placement, some drill holes intersect mineralised zones obliquely. This may result in slight over-estimation of true widths at individual intersections. At the current stage, the potential sampling bias is considered minor and does not materially affect the interpretation of geological continuity or grade.<br><br>All assay intervals are reported as downhole lengths, and true widths will be calculated where appropriate during resource estimations. Drillholes BOORD260148 and BOORD260149 have been drilled in a similar orientation to historic drillholes which were drilled down plunge and down dip of the mineralisation. BOORD260148 and BOORD260149 were drilled to test for gold variation within the contact and footwall gold lodes as well to capture any possible information on gold vein distribution and density. |

For personal use only

| SECTION 1 Sampling Techniques and Data<br>Boorara Project<br>(Criteria in this section apply to all succeeding sections) | | |
|---|---|---|
| **Criteria** | **JORC Code explanation** | **Commentary** |
| **Sample security** | The measures taken to ensure sample security. | Chain of custody is managed by Maritana Minerals. Drill Samples are dispatched weekly from the Boorara Project and delivered to the Intertek laboratory in Kalgoorlie where they are securely transported by truck to the Intertek analysis facility in Perth. |
| **Audits or reviews** | The results of any audits or reviews of sampling techniques and data. | No external audits or reviews have been conducted on sampling techniques and data at this stage. Internal reviews of sampling procedures and field implementation have been undertaken by Maritana's Resource Development Manager. |

For personal use only

| SECTION 2 Reporting of Exploration Results<br>Boorara Project<br>(Criteria listed in section 1 also apply to this section) | | |
|---|---|---|
| **Criteria** | **JORC Code explanation** | **Commentary** |
| **Mineral tenement and land tenure status** | Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.<br><br>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. | The Boorara Project is located approximately 17 km east-southeast of Kalgoorlie, 2 km west of Nimbus and 6 km north-northwest of Golden Ridge. The Boorara project is situated within mining leases M26/29, M26/277 and M26/318 accessed from the Kalgoorlie-Bulong Road via an unsealed haul road. The tenements are located within the Hampton Hill Pastoral Station.<br><br>Maritana Minerals Ltd has an executed Land Use Agreement with the Marlinyu Ghoorlie Native Title Claimant Group which includes the Boorara Gold Project. The Agreement sets out protocols for heritage surveys, safeguards for site protection, and streamlined grant of tenure and clearance procedures for activities under Maritana's tenure.<br><br>Normal Western Australian state royalties apply. A third-party royalty of $1/t is payable to a maximum of $1 million on M26/29, M26/277 and M26/318. A third-party royalty based on production milestones (with as maximum production of 100,000 Oz Au) is payable on M26/29, M26/277 and M26/318 as below;<br><br>25,000 ounces gold production – 375-ounce royalty payable<br><br>50,000 ounces gold production – 375-ounce royalty payable<br><br>75,000 ounces gold production – 375-ounce royalty payable<br><br>100,000 ounces gold production – 375-ounce royalty payable<br><br>Situated within the Boorara Project area is the historic townsite reserve. Proposed open pit operations will not impact on this land. The location of waste dumps will be sited so as to avoid Mineral Resources, exploration targets and to work with other mining infrastructure associated with the Nimbus operations located within 2 km of the proposed Boorara open pits. The tenements are held by KOTC, a wholly owned subsidiary of Maritana Minerals Limited.<br><br>The tenements are in good standing and no known impediments exist. |

For personal use only

**SECTION 2 Reporting of Exploration Results**
**Boorara Project**
**(Criteria listed in section 1 also apply to this section)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| **Exploration done by other parties** | Acknowledgment and appraisal of exploration by other parties. | Historic gold production at Boorara produced 30,673oz from the treatment of 54,731 tonnes of ore. This production was from underground mining at the Cataract shaft, East Lode shaft and the Crown Jewel shaft. Historic mine plans and sections show two orientations of mine stopes, one at 040°/25° NW and another at 315°/65°W.<br><br>Dampier Mining Pty Ltd and Texas Gulf Australia Ltd in 1980 drilled 20 RC holes for 1,038 m and 10 diamond holes for 1,695m.<br><br>Western Reefs NL in 1985 undertook soil sampling on a 40 m x 20 m grid. They also completed 180 RAB holes for 9,892 m, 268 RC holes for 20,831 m and 26 diamond holes for 2,609 m. Geological mapping was undertaken by Western Reefs including costean mapping and sampling. The Cataract shaft was refurbished and geologically mapped and surveyed. The Crown Jewel shaft was mapped and surveyed also.<br><br>Windsor Resources in 1988 drilled 174 RC holes for 11,274 m.<br><br>Newmont in 1990 drilled 338 RAB holes for 15,446 m, 39 RC holes for 4,319 m and 4 diamond holes for 718 m. Geological mapping and soil-sampling was also undertaken.<br><br>Mt Monger Gold Project in 1993 drilled 116 RC holes for 6,222 m.<br><br>Fimiston Mining NL in 1995 drilled 110 RC holes for 7,257 m and 1 diamond hole for 195 m. The data relating to the Boorara gold deposits comprising the Southern Stockwork Zone, Northern Stockwork Zone, Cataract Area, East Lode and Digger Dam was reviewed. |

personal use only

**SECTION 2 Reporting of Exploration Results**
**Boorara Project**
**(Criteria listed in section 1 also apply to this section)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| | | The database was updated to incorporate the drilling completed by Fimiston and cross sections and interpretations made. A global polygonal based resource estimate was completed.<br><br>New Hampton Goldfields Ltd in 2001 undertook a Mineral Resource Estimate and open pit design of the Southern Stockwork, Cataract and Northern Stockwork at Boorara.<br><br>Polymetals (WA) Pty Ltd in 2006 prepared a resource estimate that was not reported in accordance with the JORC Code.<br><br>Polymetals in 2009 completed 18 RC holes for 1,770 m. From this program 126 samples with >1.0g/t Au were screen fire assayed, with another 34 duplicates taking the total samples assayed via screen fire assay to 160. |

For personal use only

**SECTION 2 Reporting of Exploration Results**
**Boorara Project**
**(Criteria listed in section 1 also apply to this section)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| **Geology** | Deposit type, geological setting and style of mineralisation. | The Boorara Au deposit is an Archaean mesothermal Au deposit. The Boorara local geology consists of a sequence of ultramafic, mafic and felsic volcanic and volcaniclastic rocks, with interflow carbonaceous sediments found on the lithological boundaries. Dolerite intrusions are conformable within the sequence. The metamorphic grade of rocks at Boorara is lower greenschist facies. The alteration assemblage associated with mineralisation consists of quartz carbonate and sericite. Pyrite and arsenopyrite are associated with the higher Au grades at Boorara. Mineralisation envelopes at Boorara consist of three dominant orientations:<br>1. NW trending sub-vertical mineralisation which is typically sub parallel to dolerite contacts.<br>2. NW trending, NE shallow dipping mineralisation, sub parallel to lithological contacts.<br>3. Quartz dolerite hosted NW striking with shallow to moderate NW dipping vein arrays. |
| **Drill hole Information** | A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:<br>• easting and northing of the drill hole collar<br>• elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar<br>• dip and azimuth of the hole<br>• down hole length and interception depth<br>• hole length. | Drill hole information for the drilling discussed in this announcement is listed in Table 1 and Table 2 and includes 52 RC surface holes. All holes have assays completely returned for both 4 m composites and 1 m intervals through host geology and identified ore/mineralised zones.<br><br>All material data has been periodically released to the ASX. |

For personal use only

**SECTION 2 Reporting of Exploration Results**
**Boorara Project**
**(Criteria listed in section 1 also apply to this section)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| | If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. | All other assays from the reported drill holes that were below the defined cut-off grade of 0.5 g/t Au are not considered material for public reporting and are not included in this report. |
| **Data aggregation methods** | In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. | Reported intersections have been length-weighted to calculate intersection widths. No assays have been top-cut for the purpose of this report. |
| | Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. | Significant intersections are reported where the overall gold grade is ≥0.5 g/t Au. For these intersections, a maximum of 1 m of internal waste has been included in the width calculation. A lower cut-off of 0.5 g/t Au has been applied to define significant results, and all such intersections have been reported. |
| | The assumptions used for any reporting of metal equivalent values should be clearly stated. | Only Gold (Au) analyses are being reported.<br><br>No metal equivalent values have been used for the reporting of these exploration results. |

For personal use only

**SECTION 2 Reporting of Exploration Results**
**Boorara Project**
**(Criteria listed in section 1 also apply to this section)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| **Relationship between mineralisation widths and intercept lengths** | These relationships are particularly important in the reporting of Exploration Results. | Reported intersections are downhole lengths and do not necessarily represent the true widths of the mineralisation. Due to the vertical orientation of the mineralised zones and limitations on collar placement, many holes intersect mineralisation obliquely. True widths will be calculated where sufficient information is available, but at this stage all assays are reported as downhole lengths. |
| | If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. | The main mineralised trend along the upper dolerite contact is NW and dips on average 75-80 degrees east. Drilling within this announcement was predominantly conducted to intersect this nature of mineralisation. |
| | If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known'). | All reported intersections are downhole lengths; true widths are not precisely known at this stage. |
| **Diagrams** | Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views | Appropriate plans and sections have been included in the body of this report. |

personal use only

**SECTION 2 Reporting of Exploration Results**
**Boorara Project**
**(Criteria listed in section 1 also apply to this section)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| **Balanced reporting** | Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. | All exploration results received from drilling to date greater than 0.5g/t Au with a maximum of 1 m of internal dilution have been reported in this announcement. |
| **Other substantive exploration data** | Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. | The water table, where modelled, lies approximately 100 m below surface. |
| **Further work** | The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). | Further work has been discussed in the text and includes:<br>• Additional infill drilling along strike to the north and down dip at depth;<br>• An updated Mineral Resource Estimation;<br>• Grade Control Drilling prior to production. |

For personal use only

**SECTION 2 Reporting of Exploration Results**
**Boorara Project**
**(Criteria listed in section 1 also apply to this section)**

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| | Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. | Relevant diagrams are included in the body of this report. |