ASX Announcement
Wednesday, 19th June 2019
Ref: /VMS/606/VMS0509

# Venture Updates Riley Iron Ore Resource amid ongoing progress of Riley Iron Ore Mining Study

- **Riley Iron Ore Resource upgraded to JORC Code 2012 standard;**
- **Mining tender documents to be released this coming week;**
- **Riley Project presenting as a quick to market opportunity amidst continued strength of iron ore market;**
- **Shareholder Entitlement Offer closes Friday 21 June.**

Venture Minerals Limited **(ASX code: VMS)** ("Venture" or the "Company") is pleased to announce that as part of the ongoing Riley Iron Ore mining study update[1], the Company has upgraded the previous resource to meet the guidelines of the JORC Code 2012 (*refer Table One*). This coincides with release of the tender documents to be released this coming week to contractors for the mining, processing and haulage components of the Riley DSO Project, from which the resultant prices will be used in the updating of the mining study.

As part of the mining study update, the ore reserves will also be upgraded to JORC Code 2012 so that a decision to recommence mining can be made at the earliest opportunity by the Board. Following a favourable study outcome and a decision to mine, **Venture's goal is to commence iron ore production in Q4 2019.**

**The Company takes this opportunity to remind shareholders that the entitlement offer closes this Friday the 21st June 2019. At the completion of the entitlement offer, the Company expects that it will apply to the ASX for the Attaching Options to be listed shortly thereafter.** Shareholders applying for new shares under the entitlement offer will receive 1 Attaching Option (exercisable at 3.5c per Share) for every 2 New Shares subscribed and thus have tradeable options shortly after the close of the offer.

Venture has had the Riley Iron Ore Mine on Care & Maintenance since August 2014 shortly after it suspended operations. The **current iron ore price is now over 50%* higher in AUD terms than upon the closing of Riley. Since early last December, the 62% Fe price has risen more than 60%* in USD terms** and with the recent events at Vales' mines in Brazil **the current price levels could be sustained for at least the near term.**

The Company has **already undertaken extensive pre-production works at the Riley Project to recommence operations,** making the project a 'quick to market' opportunity for the company.

**Venture's Managing Director commented** *"The resource upgrade and the imminent release of the tender documents for the three main contracts of the Riley Mine are significant steps towards completing the updated mining study."*

*** Pricing comparisons were done on the 18th June 2019 when the 62% Fe price was US$107.50 and the exchange rate was 0.69 for A$155.36**

[1] As per ASX Announcement 16 May 2019 "Venture Kicks Off Riley Iron Ore Mine updated study".

## Venture Fast Facts

ASX Code: VMS
Shares on Issue: 651.2 million
Market Cap: $11.7 million
Cash: ~$3.0m* (31 March 19)
*incl. placement and institutional offer

## Recent Announcements

Venture Welcomes International Investor to the Company (18/06/2019)

Notice of General Meeting with Proxy Form (17/05/2019)

Entitlement Offer Prospectus (20/05/2019)

Riley Mine off-take secured with Tier 2 Iron Ore Trader (02/05/2019)

Quarterly Report ending 31 December 2018 (14/03/2019)

Half Year Report ending 31 December 2018 (14/03/2019)

Major EM Survey to Target Renison Style Tin Mineralisation at Mount Lindsay (13/03/2019)

Further massive sulfides intersected with Cu &Zn at Thor (21/02/2019)

RIU Explorers' Conference Presentation – February 2019 (20/02/2019)

Venture to review restarting Riley Iron Ore Mine (18/02/2019)

## Registered Office

Venture Minerals Limited
ABN 51 119 678 385
Suite 3, Level 3, 24 Outram Street, West Perth, WA, 6005

T: +61 8 6279 9428
F: +61 8 6500 9986
E: info@ventureminerals.com.au




For personal use only

For personal use only

**Highlights at the Riley DSO Hematite Project include:**


- **Binding Terms Sheet signed for the Riley off-take** with Prosperity Steel United Singapore Pte Ltd, **one of the largest iron ore traders in the world** *(refer to ASX announcement 2 May 2019)*;
- Riley Iron Ore Mine is situated on a granted mining lease and is positioned to recommence operations within a very short period of time;
- Approximately **90% of the Equipment** that was **previously purchased is still on hand**;
- Riley has **Reserves of 1.8Mt @ 57% Fe with low impurities** *(refer Table Two)*;
- The **Riley DSO deposit is all at surface, located less than 2 km from a sealed road that accesses existing rail and port facilities** *(refer Figure One).*

**Figure One | Location Map for Mount Lindsay Tin-Tungsten Deposit/Riley DSO Deposit/Livingstone DSO Deposit**

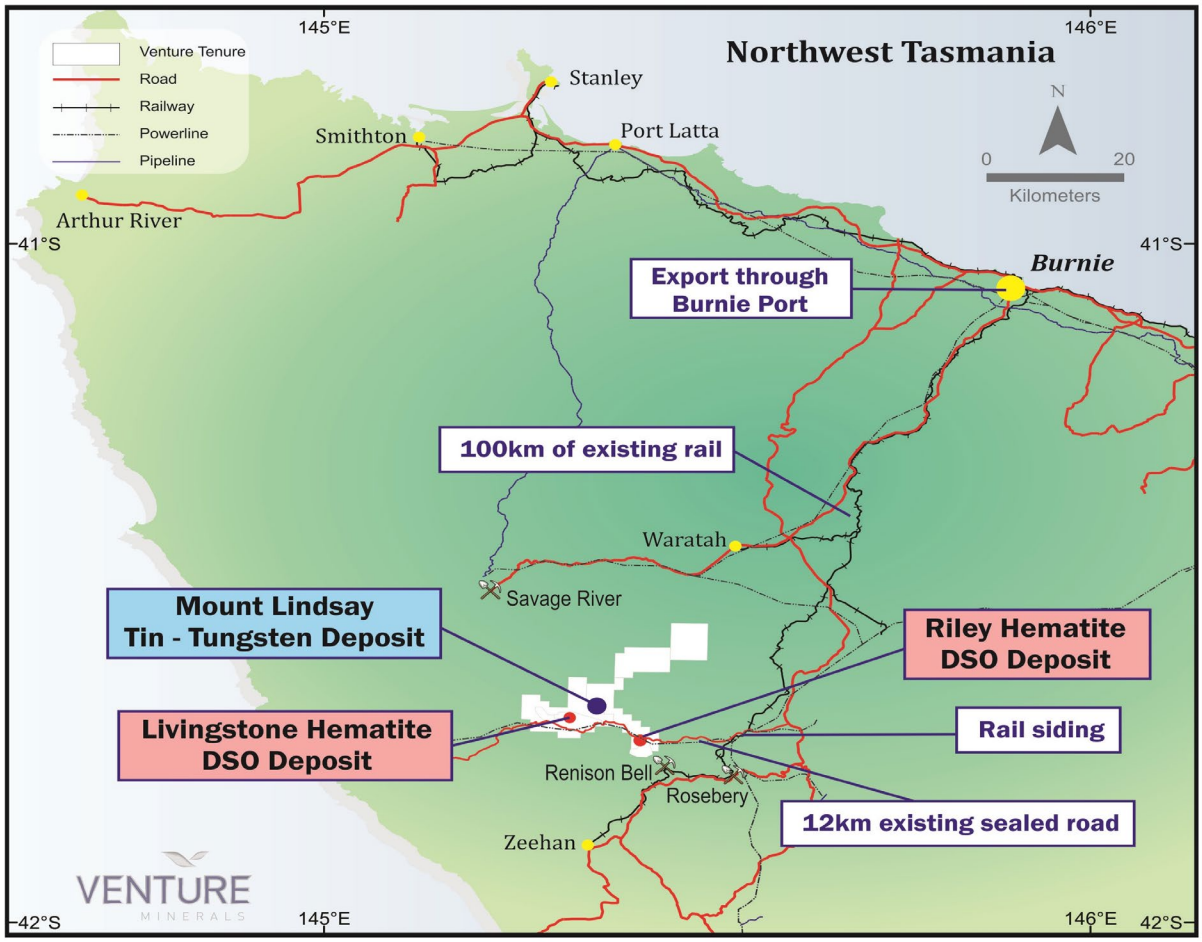

For personal use only

**Figure Two | Riley Resource Extent Map showing resource data by type. Red = pits, green = trenches, blue = power auger. Current resource outline shaded in orange. Ten metre topographic contours shown as green lines.**

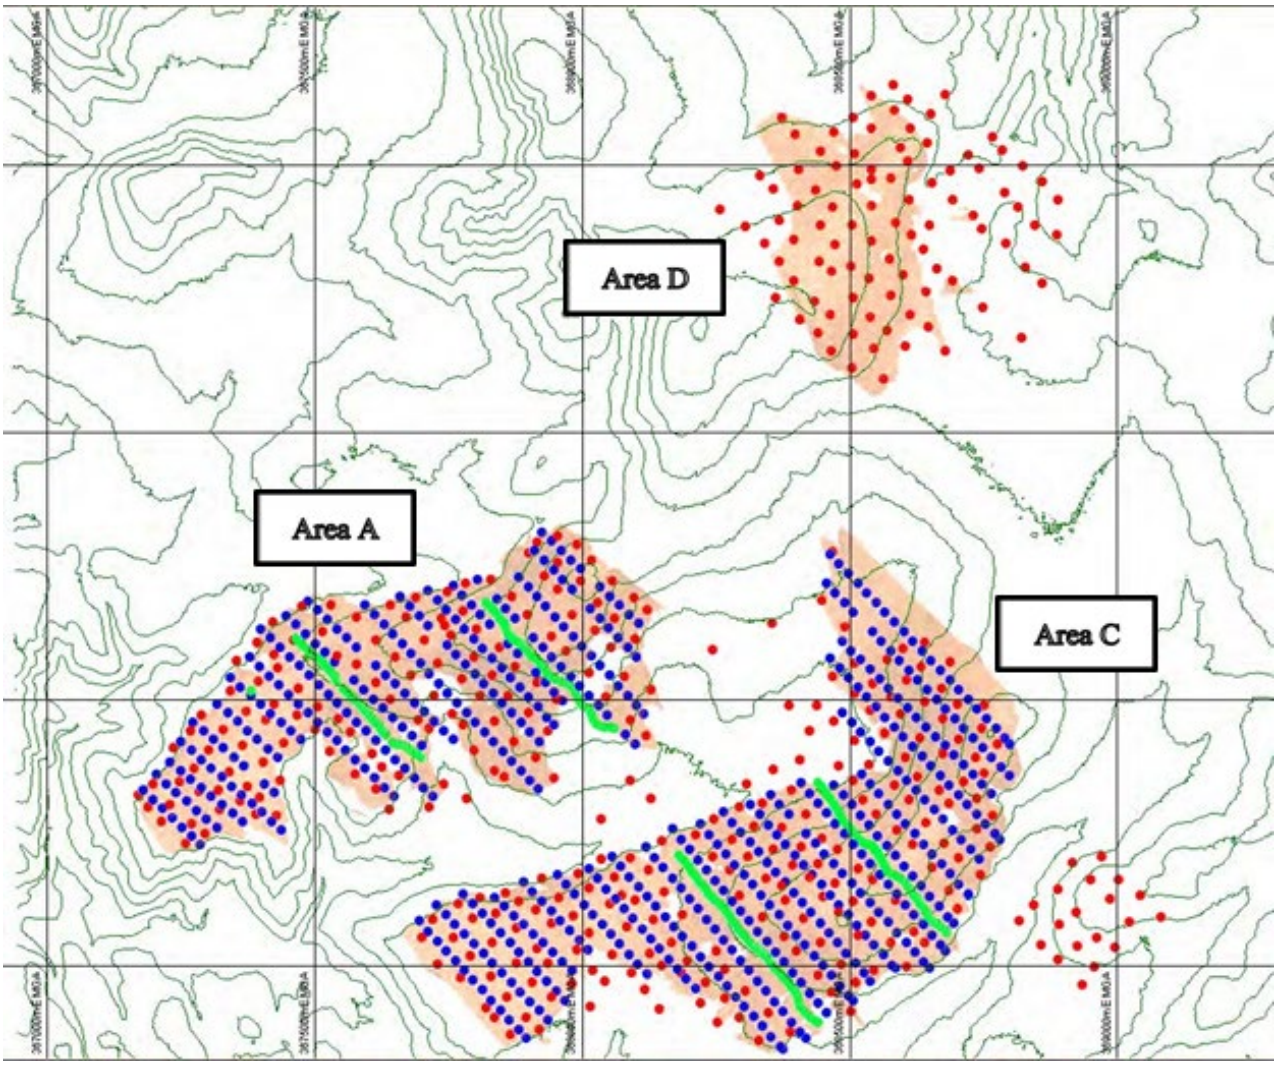

## Overview- Riley DSO Hematite Project

The 100% owned Riley DSO Project is located 10 km from the Mount Lindsay Deposit *(refer Figure One)* and occurs as a hematite rich pisolitic and cemented laterite. The deposit is all at surface, located less than 2 km from a sealed road that accesses existing rail and port facilities.

A maiden resource statement of 2mt @ 57% Fe was defined in July 2012 under the JORC Code 2004, this has now been upgraded to meet the guidelines of the JORC Code 2012 as part of this ASX announcement *(refer Table One)*.

**Table One | Resource Statement - Riley DSO Project**

| Resource | Tonnes | Fe (%) | Fe (%) Calcined | $SiO_2$ (%) | $Al_2O_3$ (%) | P (%) | S (%) | LOI (%) |
|---|---|---|---|---|---|---|---|---|
| Indicated | **2.0mt** | **57** | 62 | 3.3 | 2.7 | 0.03 | 0.08 | 7.9 |

Following completion of the July 2012 resource, Venture engaged independent mining engineers, Rock Team, to complete mining studies on the deposit and produce a reserve statement. With all the hematite resources at Riley located at or near surface, the study delivered a 90% conversion rate of resource to reserve *(refer Table Two)*.

**Table Two |Reserve Statement - Riley DSO Project**

| Reserve | Tonnes | Fe (%) | Fe (%) Calcined | $SiO_2$ (%) | $Al_2O_3$ (%) | P (%) | S (%) | LOI (%) |
|---|---|---|---|---|---|---|---|---|
| Probable | **1.8mt** | **57** | 61 | 3.7 | 2.6 | 0.03 | 0.07 | 7.8 |

Note: Refer to ASX announcement on 26 July 2012.
*This information was prepared and first disclosed under the JORC Code 2004. It has not been updated since to comply with the JORC Code 2012 on the basis that the information has not materially changed since it was last reported.*

For personal use only

**Table Three | Riley test pits, trench channels and auger results >75 % MR and >53 % beneficiated Fe grade for Areas A and C, >63% MR and >53 % beneficiated Fe grade for Area D. All coordinates MGA Zone55 GDA94, all assays >1 mm dry screen beneficiated, MR = Mass Recovery of >1mm fraction. LOI conducted at 1000 °C.**

| Deposit | Pit/Hole | East m | North m | RL m | EOH m | From m | To m | Interval m | MR % | Fe % | $SiO_2$ % | $Al_2O_3$ % | S % | P % | Cr % | LOI % |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Area A | RYAA020 | 367328 | 5376803 | 190.1 | 0.2 | 0 | 0.2 | 0.2 | 81 | 57.84 | 3.79 | 1.62 | 0.053 | 0.027 | 2.95 | 6.5 |
| Area A | RYAA051 | 367363 | 5377023 | 192.5 | 0.25 | 0 | 0.25 | 0.25 | 80 | 59.13 | 3.61 | 1.93 | 0.042 | 0.032 | 3.34 | 3.87 |
| Area A | RYAA052 | 367382 | 5377006 | 192 | 0.3 | 0 | 0.3 | 0.3 | 90 | 61.19 | 3.14 | 1.55 | 0.037 | 0.036 | 2.98 | 2.44 |
| Area A | RYAA054 | 367419 | 5376973 | 191.3 | 0.2 | 0 | 0.1 | 0.1 | 83 | 57.02 | 5.11 | 1.93 | 0.047 | 0.029 | 3.9 | 4.61 |
| Area A | RYAA056 | 367456 | 5376940 | 190.2 | 0.3 | 0 | 0.3 | 0.3 | 83 | 56.41 | 4.77 | 2.53 | 0.054 | 0.027 | 3.08 | 6.53 |
| Area A | RYAA059 | 367398 | 5377060 | 189 | 0.4 | 0 | 0.4 | 0.4 | 90 | 60.84 | 3.94 | 1.93 | 0.046 | 0.036 | 2.29 | 2.75 |
| Area A | RYAA060 | 367416 | 5377043 | 191.7 | 0.2 | 0 | 0.2 | 0.2 | 89 | 59.03 | 4.04 | 1.91 | 0.047 | 0.038 | 2.71 | 4.51 |
| Area A | RYAA061 | 367434 | 5377025 | 192.1 | 0.15 | 0 | 0.15 | 0.15 | 79 | 59.47 | 3.61 | 1.7 | 0.041 | 0.032 | 2.71 | 4.61 |
| Area A | RYAA062 | 367452 | 5377008 | 191.3 | 0.3 | 0 | 0.3 | 0.3 | 85 | 59.35 | 2.7 | 2.21 | 0.046 | 0.032 | 2.4 | 5.73 |
| Area A | RYAA065 | 367506 | 5376956 | 184.1 | 0.5 | 0 | 0.5 | 0.5 | 78 | 56.94 | 6.37 | 2.3 | 0.048 | 0.024 | 2.74 | 4.91 |
| Area A | RYAA076 | 367437 | 5377097 | 189 | 0.3 | 0 | 0.3 | 0.3 | 92 | 63.05 | 1.18 | 1.74 | 0.039 | 0.045 | 1.99 | 3.17 |
| Area A | RYAA111 | 367544 | 5377132 | 195.6 | 0.65 | 0 | 0.65 | 0.65 | 88 | 58.7 | 1.13 | 2.55 | 0.061 | 0.035 | 2.36 | 7.96 |
| Area A | RYAA165 | 367799 | 5377113 | 216.8 | 0.2 | 0 | 0.2 | 0.2 | 84 | 58.31 | 2.05 | 2.34 | 0.057 | 0.032 | 2.72 | 7.29 |
| Area A | RYAA169 | 367867 | 5377040 | 209.6 | 0.6 | 0 | 0.6 | 0.6 | 83 | 59.46 | 1.43 | 1.98 | 0.052 | 0.03 | 2.91 | 6.37 |
| Area A | RYAA182 | 367880 | 5377086 | 221.1 | 0.5 | 0 | 0.5 | 0.5 | 86 | 60.85 | 1.97 | 1.91 | 0.045 | 0.04 | 2.64 | 4.26 |
| Area C | RYAC053 | 367978 | 5376567 | 191.7 | 0.3 | 0 | 0.25 | 0.25 | 79 | 55.14 | 6.78 | 1.96 | 0.056 | 0.02 | 3.83 | 5.69 |
| Area C | RYAC061 | 368038 | 5376578 | 190 | 0.25 | 0 | 0.25 | 0.25 | 77 | 57.07 | 7.66 | 1.96 | 0.04 | 0.02 | 2.44 | 4.18 |
| Area C | RYAC062 | 368055 | 5376560 | 188.5 | 0.2 | 0 | 0.2 | 0.2 | 95 | 62.97 | 2.59 | 1.49 | 0.041 | 0.033 | 1.71 | 2.57 |
| Area C | RYAC082 | 368089 | 5376668 | 189.8 | 0.35 | 0 | 0.35 | 0.35 | 89 | 60.27 | 4.32 | 2.19 | 0.052 | 0.03 | 1.61 | 4.1 |
| Area C | RYAC083 | 368106 | 5376649 | 190.6 | 0.35 | 0 | 0.35 | 0.35 | 88 | 57.66 | 5.6 | 2.23 | 0.043 | 0.024 | 1.6 | 6.64 |
| Area C | RYAC084 | 368123 | 5376630 | 191.3 | 0.25 | 0 | 0.25 | 0.25 | 86 | 57.45 | 7.25 | 1.87 | 0.048 | 0.032 | 1.51 | 5.83 |
| Area C | RYAC085 | 368139 | 5376611 | 191.7 | 0.2 | 0 | 0.2 | 0.2 | 92 | 60.02 | 6.99 | 1.36 | 0.037 | 0.032 | 1.6 | 2.74 |
| Area C | RYAC102 | 368137 | 5376703 | 188.4 | 0.35 | 0 | 0.35 | 0.35 | 94 | 62.5 | 2.8 | 1.74 | 0.034 | 0.038 | 1.87 | 2.55 |
| Area C | RYAC103 | 368153 | 5376684 | 191.7 | 0.45 | 0 | 0.45 | 0.45 | 94 | 62.95 | 2.65 | 1.83 | 0.039 | 0.035 | 1.53 | 2.48 |
| Area C | RYAC104 | 368169 | 5376665 | 192.8 | 0.1 | 0 | 0.1 | 0.1 | 86 | 59.5 | 4.68 | 2.17 | 0.045 | 0.027 | 1.52 | 5.06 |
| Area C | RYAC105 | 368185 | 5376646 | 194.6 | 0.25 | 0 | 0.25 | 0.25 | 77 | 55.4 | 3.59 | 3.14 | 0.102 | 0.015 | 1.25 | 11.26 |
| Area C | RYAC106 | 368201 | 5376626 | 196.3 | 0.3 | 0 | 0.3 | 0.3 | 94 | 64.12 | 1.99 | 1.62 | 0.054 | 0.041 | 1.24 | 2.19 |
| Area C | RYAC169 | 368429 | 5376600 | 222 | 0.35 | 0 | 0.35 | 0.35 | 90 | 62.92 | 1.69 | 1.59 | 0.038 | 0.043 | 1.82 | 3.22 |
| Area C | RYAC170 | 368446 | 5376581 | 222.3 | 0.2 | 0 | 0.2 | 0.2 | 89 | 58.1 | 3.14 | 1.98 | 0.038 | 0.03 | 3.48 | 5.68 |
| Area C | RYAC171 | 368462 | 5376562 | 221.2 | 0.2 | 0 | 0.2 | 0.2 | 91 | 61.43 | 1.3 | 1.87 | 0.04 | 0.031 | 1.89 | 5.4 |
| Area C | RYAC172 | 368478 | 5376543 | 218.7 | 0.2 | 0 | 0.2 | 0.2 | 91 | 59.46 | 2.97 | 1.89 | 0.042 | 0.028 | 2.25 | 5.94 |
| Area C | RYAC173 | 368495 | 5376524 | 215.8 | 0.15 | 0 | 0.15 | 0.15 | 95 | 61.7 | 2.35 | 1.7 | 0.036 | 0.036 | 1.83 | 4.19 |
| Area C | RYAC185 | 368448 | 5376652 | 219.6 | 0.4 | 0 | 0.4 | 0.4 | 94 | 62.92 | 1.71 | 1.53 | 0.037 | 0.037 | 2.24 | 2.63 |
| Area C | RYAC186 | 368465 | 5376633 | 221.8 | 0.3 | 0 | 0.3 | 0.3 | 89 | 60 | 1.63 | 1.96 | 0.047 | 0.032 | 2.43 | 6.22 |
| Area C | RYAC188 | 368498 | 5376596 | 223.4 | 0.35 | 0 | 0.35 | 0.35 | 80 | 58.89 | 2.57 | 1.89 | 0.057 | 0.025 | 2.53 | 6.82 |
| Area C | RYAC189 | 368514 | 5376577 | 222.5 | 0.3 | 0 | 0.3 | 0.3 | 88 | 57.87 | 2.55 | 2 | 0.05 | 0.025 | 2.49 | 8.25 |
| Area C | RYAC190 | 368531 | 5376558 | 219.4 | 0.25 | 0 | 0.25 | 0.25 | 94 | 59.41 | 2.18 | 1.79 | 0.037 | 0.028 | 2.67 | 6.28 |
| Area C | RYAC191 | 368547 | 5376539 | 215.3 | 0.35 | 0 | 0.35 | 0.35 | 90 | 60.38 | 3.25 | 1.76 | 0.042 | 0.038 | 1.75 | 5.28 |
| Area C | RYAC203 | 368488 | 5376674 | 219.7 | 0.25 | 0 | 0.25 | 0.25 | 93 | 61.25 | 1.3 | 1.79 | 0.038 | 0.032 | 2.69 | 4.6 |
| Area C | RYAC204 | 368505 | 5376655 | 221.3 | 0.3 | 0 | 0.3 | 0.3 | 94 | 62.76 | 1.3 | 1.57 | 0.039 | 0.043 | 1.89 | 3.86 |
| Area C | RYAC205 | 368522 | 5376637 | 222.9 | 0.2 | 0 | 0.2 | 0.2 | 84 | 56.57 | 3.81 | 2.38 | 0.037 | 0.026 | 2.86 | 7.79 |
| Area C | RYAC206 | 368539 | 5376618 | 222 | 0.25 | 0 | 0.25 | 0.25 | 93 | 61.11 | 1.39 | 1.96 | 0.035 | 0.04 | 2.26 | 5.13 |
| Area C | RYAC207 | 368556 | 5376600 | 218.9 | 0.6 | 0 | 0.6 | 0.6 | 92 | 63.41 | 1.37 | 1.61 | 0.035 | 0.049 | 1.89 | 2.77 |
| Area C | RYAC208 | 368572 | 5376582 | 216.2 | 0.6 | 0 | 0.6 | 0.6 | 94 | 64.5 | 1.24 | 1.47 | 0.033 | 0.045 | 1.68 | 1.84 |
| Area C | RYAC209 | 368589 | 5376563 | 213.2 | 0.3 | 0 | 0.3 | 0.3 | 94 | 63.72 | 2.01 | 1.53 | 0.035 | 0.046 | 1.71 | 2.02 |
| Area C | RYAC223 | 368556 | 5376672 | 225.2 | 0.25 | 0 | 0.25 | 0.25 | 85 | 61.01 | 1.28 | 1.96 | 0.038 | 0.032 | 2.49 | 5.09 |
| Area C | RYAC224 | 368573 | 5376653 | 224.9 | 0.3 | 0 | 0.3 | 0.3 | 95 | 63.19 | 1.58 | 1.62 | 0.037 | 0.038 | 1.78 | 3.14 |
| Area C | RYAC225 | 368589 | 5376634 | 223.2 | 0.25 | 0 | 0.25 | 0.25 | 80 | 56.86 | 4.88 | 2.36 | 0.054 | 0.023 | 1.98 | 7.77 |
| Area C | RYAC226 | 368605 | 5376615 | 220.1 | 0.4 | 0 | 0.4 | 0.4 | 90 | 60.98 | 2.46 | 2.1 | 0.044 | 0.034 | 1.75 | 4.99 |
| Area C | RYAC319 | 368509 | 5377163 | 199.1 | 0.1 | 0 | 0.1 | 0.1 | 81 | 53.29 | 2.78 | 2.66 | 0.104 | 0.017 | 4.12 | 9.69 |
| Area C | RYAC5001 | 368423 | 5376416 | 197.5 | 0.3 | 0 | 0.3 | 0.3 | 77 | 60.8 | 3.25 | 1.75 | 0.046 | 0.032 | 1.74 | 4.33 |
| Area C | RYAC5002 | 368507 | 5376425 | 199.6 | 0.7 | 0 | 0.7 | 0.7 | 77 | 60.8 | 3.25 | 1.75 | 0.046 | 0.032 | 1.74 | 4.33 |
| Area C | RYAC5003 | 368482 | 5376597 | 223.7 | 0.4 | 0 | 0.4 | 0.4 | 77 | 60.8 | 3.25 | 1.75 | 0.046 | 0.032 | 1.74 | 4.33 |
| Area C | RYAC5004 | 368594 | 5376507 | 209.4 | 0.3 | 0 | 0.3 | 0.3 | 77 | 60.8 | 3.25 | 1.75 | 0.046 | 0.032 | 1.74 | 4.33 |
| Area C | RYAC5005 | 368594 | 5376657 | 225.8 | 0.8 | 0 | 0.8 | 0.8 | 77 | 60.8 | 3.25 | 1.75 | 0.046 | 0.032 | 1.74 | 4.33 |
| Area C | RYAC5006 | 368650 | 5376599 | 213.6 | 0.4 | 0 | 0.4 | 0.4 | 77 | 60.8 | 3.25 | 1.75 | 0.046 | 0.032 | 1.74 | 4.33 |
| Area C | RYAC5007 | 368678 | 5376727 | 222.8 | 0.45 | 0 | 0.45 | 0.45 | 77 | 60.8 | 3.25 | 1.75 | 0.046 | 0.032 | 1.74 | 4.33 |
| Area C | RYAC5008 | 368743 | 5376667 | 205.1 | 0.85 | 0 | 0.85 | 0.85 | 77 | 60.8 | 3.25 | 1.75 | 0.046 | 0.032 | 1.74 | 4.33 |

| Deposit | Pit/Hole | East m | North m | RL m | EOH m | From m | To m | Interval m | MR % | Fe % | $SiO_2$ % | $Al_2O_3$ % | S % | P % | Cr % | LOI % |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Area C | RYAC5009 | 368492 | 5376477 | 209.1 | 0.4 | 0 | 0.4 | 0.4 | 77 | 60.8 | 3.25 | 1.75 | 0.046 | 0.032 | 1.74 | 4.33 |
| Area C | RYAC5010 | 368676 | 5376651 | 215.7 | 0.6 | 0 | 0.6 | 0.6 | 77 | 60.8 | 3.25 | 1.75 | 0.046 | 0.032 | 1.74 | 4.33 |
| Area A | RYPA0101 | 367171 | 5376820 | 182.7 | 1.4 | 0.2 | 1.2 | 1 | 77 | 54.7 | 6.57 | 2.29 | 0.139 | 0.026 | 3.31 | 6.95 |
| Area A | RYPA0102 | 367189 | 5376797 | 186 | 2.3 | 0 | 0.2 | 0.2 | 86 | 58.74 | 4.26 | 1.76 | 0.05 | 0.036 | 3.36 | 3.96 |
| Area A | RYPA0103 | 367214 | 5376771 | 186.3 | 3 | 0 | 0.3 | 0.3 | 84 | 60.04 | 3.04 | 1.68 | 0.052 | 0.033 | 3.24 | 2.99 |
| Area A | RYPA0104 | 367260 | 5376731 | 185.7 | 3.5 | 0 | 0.4 | 0.4 | 86 | 59.51 | 2.42 | 2 | 0.085 | 0.028 | 3.15 | 4.91 |
| Area A | RYPA0201 | 367248 | 5376845 | 188.4 | 5.3 | 0 | 0.2 | 0.2 | 81 | 60.77 | 2.76 | 1.64 | 0.054 | 0.039 | 3.2 | 2.74 |
| Area A | RYPA0201 | 367248 | 5376845 | 188.4 | 5.3 | 0.2 | 1.5 | 1.3 | 85 | 53.29 | 4.9 | 2.8 | 0.174 | 0.031 | 3.83 | 9.27 |
| Area A | RYPA0202 | 367284 | 5376828 | 190.3 | 2 | 0 | 0.3 | 0.3 | 88 | 61.57 | 1.99 | 1.42 | 0.039 | 0.037 | 3.23 | 2.74 |
| Area A | RYPA0203 | 367322 | 5376793 | 189.5 | 1.6 | 0 | 0.3 | 0.3 | 78 | 58.57 | 2.78 | 1.68 | 0.059 | 0.026 | 3.49 | 4.13 |
| Area A | RYPA0301 | 367269 | 5376939 | 188.2 | 2.1 | 0 | 0.9 | 0.9 | 78 | 54.97 | 2.78 | 2.13 | 0.086 | 0.024 | 3.9 | 9.46 |
| Area A | RYPA0301 | 367269 | 5376939 | 188.2 | 2.1 | 0.9 | 1.6 | 0.7 | 76 | 53.54 | 2.07 | 2.47 | 0.087 | 0.023 | 4.2 | 11.39 |
| Area A | RYPA0305 | 367397 | 5376816 | 190 | 2 | 0 | 0.4 | 0.4 | 86 | 59.52 | 2.89 | 1.85 | 0.057 | 0.032 | 3.32 | 4.14 |
| Area A | RYPA0306 | 367430 | 5376783 | 188.3 | 2.1 | 0 | 0.5 | 0.5 | 85 | 58.17 | 3.59 | 2 | 0.054 | 0.031 | 3.3 | 5.21 |
| Area A | RYPA0402 | 367374 | 5376977 | 191.3 | 4 | 0.4 | 1.2 | 0.8 | 76 | 53.28 | 3.83 | 2.57 | 0.123 | 0.022 | 4.32 | 9.7 |
| Area A | RYPA0402 | 367374 | 5376977 | 191.3 | 4 | 0 | 0.4 | 0.4 | 82 | 59.47 | 2.89 | 1.76 | 0.049 | 0.027 | 3.41 | 4.22 |
| Area A | RYPA0404 | 367444 | 5376917 | 187.8 | 2 | 0 | 0.3 | 0.3 | 78 | 55.03 | 4.04 | 3.49 | 0.115 | 0.042 | 2.77 | 9.06 |
| Area A | RYPA0501 | 367393 | 5377105 | 181.5 | 4 | 0 | 0.7 | 0.7 | 88 | 58.97 | 2.95 | 2.42 | 0.08 | 0.033 | 2.44 | 5.75 |
| Area A | RYPA0502 | 367424 | 5377084 | 189.4 | 4 | 0 | 0.3 | 0.3 | 85 | 56.9 | 4.02 | 2.34 | 0.051 | 0.031 | 2.92 | 6.01 |
| Area A | RYPA0503 | 367432 | 5377057 | 190.8 | 5 | 0.6 | 2.1 | 1.5 | 88 | 56.68 | 4.6 | 2.08 | 0.085 | 0.037 | 2.75 | 5.84 |
| Area A | RYPA0503 | 367432 | 5377057 | 190.8 | 5 | 0 | 0.6 | 0.6 | 94 | 64.2 | 1.16 | 1.61 | 0.037 | 0.054 | 1.96 | 2.02 |
| Area A | RYPA0504 | 367471 | 5377020 | 192.4 | 2.3 | 0.3 | 1.1 | 0.8 | 85 | 58.33 | 3.4 | 2.1 | 0.089 | 0.034 | 2.65 | 6.28 |
| Area A | RYPA0504 | 367471 | 5377020 | 192.4 | 2.3 | 0 | 0.3 | 0.3 | 96 | 64 | 1.09 | 1.42 | 0.037 | 0.054 | 2.12 | 1.9 |
| Area A | RYPA0505 | 367506 | 5376986 | 186.6 | 5 | 0 | 0.6 | 0.6 | 96 | 63.36 | 1.84 | 1.61 | 0.043 | 0.045 | 1.99 | 2.48 |
| Area A | RYPA0506 | 367546 | 5376964 | 185 | 6 | 0 | 0.6 | 0.6 | 83 | 59.74 | 1.9 | 2.68 | 0.039 | 0.036 | 2.22 | 4.93 |
| Area A | RYPA0507 | 367567 | 5376938 | 184.1 | 5 | 0 | 0.5 | 0.5 | 77 | 57.81 | 3.08 | 3.19 | 0.05 | 0.031 | 2.43 | 6.61 |
| Area A | RYPA0508 | 367609 | 5376898 | 188.6 | 3 | 0 | 0.6 | 0.6 | 77 | 56.35 | 5.78 | 3.59 | 0.068 | 0.021 | 1.78 | 6.19 |
| Area A | RYPA0510 | 367659 | 5376856 | 185.9 | 4 | 0 | 0.8 | 0.8 | 75 | 56.57 | 4.79 | 3.15 | 0.075 | 0.022 | 1.9 | 7.27 |
| Area A | RYPA0603 | 367542 | 5377081 | 196.6 | 4 | 0 | 1.3 | 1.3 | 91 | 61.25 | 1.99 | 1.89 | 0.065 | 0.04 | 2.22 | 4.2 |
| Area A | RYPA0604 | 367580 | 5377066 | 199 | 3 | 0 | 0.6 | 0.6 | 83 | 58.42 | 2.14 | 2.53 | 0.07 | 0.028 | 2.43 | 7.23 |
| Area A | RYPA0605 | 367616 | 5377032 | 199.8 | 5 | 0 | 0.7 | 0.7 | 90 | 61.21 | 1.56 | 2.06 | 0.053 | 0.042 | 2.36 | 4.35 |
| Area A | RYPA0606 | 367643 | 5376999 | 197.9 | 3 | 0 | 0.8 | 0.8 | 91 | 61.45 | 1.5 | 2.12 | 0.049 | 0.041 | 2.29 | 4.23 |
| Area A | RYPA0607 | 367695 | 5376961 | 191.7 | 3 | 0 | 0.8 | 0.8 | 86 | 62.12 | 1.99 | 1.95 | 0.043 | 0.041 | 2.2 | 3.18 |
| Area A | RYPA0608 | 367715 | 5376945 | 184.5 | 5 | 0 | 1.1 | 1.1 | 87 | 60.65 | 2.59 | 2.13 | 0.054 | 0.04 | 2.3 | 4.18 |
| Area A | RYPA0608 | 367715 | 5376945 | 184.5 | 5 | 1.1 | 1.3 | 0.2 | 77 | 57.26 | 5.07 | 2.4 | 0.076 | 0.03 | 2.61 | 5.68 |
| Area C | RYPA0609 | 367798 | 5376903 | 184 | 4 | 0 | 0.4 | 0.4 | 91 | 60.29 | 1.75 | 2.12 | 0.055 | 0.033 | 2.43 | 5.35 |
| Area C | RYPA0609 | 367798 | 5376903 | 184 | 4 | 0.4 | 0.8 | 0.4 | 76 | 54.82 | 2.93 | 3.78 | 0.097 | 0.023 | 2.77 | 9.71 |
| Area C | RYPA0609 | 367798 | 5376903 | 184 | 4 | 0.8 | 1.4 | 0.6 | 76 | 54.65 | 4.24 | 3.31 | 0.105 | 0.022 | 2.62 | 9.3 |
| Area C | RYPA0610 | 367837 | 5376866 | 188.5 | 5.9 | 0 | 0.4 | 0.4 | 87 | 56.47 | 5.43 | 2.68 | 0.078 | 0.029 | 2.2 | 6.8 |
| Area A | RYPA0701 | 367642 | 5377176 | 194.5 | 2.5 | 0 | 0.75 | 0.75 | 89 | 61.41 | 1.39 | 1.85 | 0.04 | 0.04 | 2.44 | 2.77 |
| Area A | RYPA0702 | 367673 | 5377154 | 202.7 | 3.3 | 0.5 | 2.2 | 1.7 | 76 | 54.21 | 2.25 | 2.89 | 0.093 | 0.017 | 3.02 | 11.92 |
| Area A | RYPA0702 | 367673 | 5377154 | 202.7 | 3.3 | 0 | 0.5 | 0.5 | 83 | 53.03 | 4.77 | 2.47 | 0.068 | 0.022 | 3.53 | 10.61 |
| Area A | RYPA0703 | 367705 | 5377110 | 209.8 | 3.4 | 0 | 0.7 | 0.7 | 90 | 61.22 | 1.82 | 1.79 | 0.055 | 0.041 | 2.57 | 4.05 |
| Area A | RYPA0705 | 367776 | 5377038 | 199.7 | 2.5 | 0 | 2 | 2 | 80 | 58.89 | 1.95 | 2.3 | 0.054 | 0.034 | 3.02 | 5.79 |
| Area A | RYPA0706 | 367810 | 5377007 | 193 | 2.7 | 0 | 1 | 1 | 85 | 59.58 | 1.16 | 1.96 | 0.051 | 0.035 | 3.06 | 6.24 |
| Area A | RYPA0706 | 367810 | 5377007 | 193 | 2.7 | 1 | 2.3 | 1.3 | 80 | 57.34 | 1.97 | 2.3 | 0.065 | 0.032 | 3.27 | 8.03 |
| Area A | RYPA0707 | 367838 | 5376959 | 191.1 | 2.5 | 0 | 1.4 | 1.4 | 81 | 55.77 | 2.8 | 2.98 | 0.072 | 0.025 | 3.04 | 8.74 |
| Area A | RYPA0708 | 367874 | 5376920 | 195.5 | 3 | 0 | 0.6 | 0.6 | 91 | 61.09 | 2.05 | 1.96 | 0.043 | 0.036 | 2.61 | 3.84 |
| Area A | RYPA0801 | 367749 | 5377202 | 197.4 | 2.4 | 0 | 0.6 | 0.6 | 81 | 59.02 | 2.99 | 2.06 | 0.063 | 0.031 | 3 | 5.21 |
| Area A | RYPA0802 | 367778 | 5377165 | 210.3 | 4.1 | 0 | 0.4 | 0.4 | 89 | 60.81 | 1.97 | 1.57 | 0.044 | 0.035 | 3.07 | 4.07 |
| Area A | RYPA0803 | 367803 | 5377131 | 217.2 | 3.5 | 0 | 0.8 | 0.8 | 88 | 61.46 | 1.35 | 2 | 0.046 | 0.041 | 2.52 | 4.19 |
| Area A | RYPA0806 | 367916 | 5377032 | 211.8 | 2.3 | 0.8 | 1 | 0.2 | 86 | 58.15 | 2.5 | 2.4 | 0.053 | 0.027 | 2.79 | 7.06 |
| Area A | RYPA0901 | 367830 | 5377224 | 202.2 | 2.7 | 0 | 0.7 | 0.7 | 88 | 61.8 | 1.99 | 1.7 | 0.036 | 0.032 | 2.55 | 2.73 |
| Area A | RYPA0902 | 367869 | 5377193 | 216.4 | 3 | 0 | 3 | 3 | 81 | 59.83 | 1.84 | 2.23 | 0.065 | 0.027 | 2.07 | 6.29 |
| Area A | RYPA0903 | 367899 | 5377158 | 223.3 | 3.3 | 0 | 2.5 | 2.5 | 92 | 61.41 | 2.07 | 1.81 | 0.047 | 0.033 | 2.3 | 3.94 |
| Area A | RYPA0904 | 367945 | 5377118 | 226.6 | 2.6 | 0 | 0.8 | 0.8 | 85 | 57.44 | 2.5 | 2.63 | 0.058 | 0.033 | 2.43 | 8.46 |
| Area A | RYPA1001 | 367901 | 5377274 | 211.3 | 2.7 | 0 | 0.8 | 0.8 | 88 | 53.11 | 3.89 | 3.31 | 0.099 | 0.013 | 1.57 | 13.63 |
| Area A | RYPA1001 | 367901 | 5377274 | 211.3 | 2.7 | 0.8 | 1.2 | 0.4 | 81 | 54.74 | 4.94 | 2.57 | 0.084 | 0.023 | 3.17 | 8.4 |
| Area A | RYPA1001 | 367901 | 5377274 | 211.3 | 2.7 | 1.2 | 2.1 | 0.9 | 79 | 60.3 | 1.48 | 2.7 | 0.094 | 0.025 | 2.64 | 4.84 |
| Area A | RYPA1002 | 367930 | 5377231 | 224.3 | 3.7 | 0.4 | 1.6 | 1.2 | 79 | 57.5 | 1.71 | 1.79 | 0.06 | 0.023 | 3.13 | 8.68 |
| Area A | RYPA1003 | 367955 | 5377204 | 230 | 3 | 0 | 2.4 | 2.4 | 85 | 59.48 | 1.97 | 2.29 | 0.063 | 0.033 | 2.94 | 5.54 |
| Area A | RYPA1004 | 367981 | 5377157 | 230.1 | 2.1 | 0 | 0.8 | 0.8 | 90 | 61.35 | 1.78 | 2.02 | 0.039 | 0.041 | 2.32 | 3.78 |

| Deposit | Pit/Hole | East m | North m | RL m | EOH m | From m | To m | Interval m | MR % | Fe % | $SiO_2$ % | $Al_2O_3$ % | S % | P % | Cr % | LOI % |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Area A | RYPA1005 | 368026 | 5377128 | 223.8 | 2.2 | 0 | 0.4 | 0.4 | 89 | 61.68 | 2.27 | 2.06 | 0.038 | 0.041 | 1.76 | 3.74 |
| Area A | RYPA1101 | 367954 | 5377305 | 216.6 | 2.5 | 0 | 1.9 | 1.9 | 78 | 58.86 | 1.52 | 1.89 | 0.078 | 0.023 | 3.02 | 7.23 |
| Area A | RYPA2101 | 367199 | 5376840 | 185.7 | 1.3 | 0 | 0.2 | 0.2 | 86 | 57.15 | 5.3 | 1.96 | 0.055 | 0.03 | 3.52 | 4.78 |
| Area A | RYPA2102 | 367231 | 5376803 | 187.6 | 3.3 | 0 | 0.3 | 0.3 | 87 | 59.28 | 3.55 | 1.91 | 0.051 | 0.036 | 3.34 | 3.91 |
| Area A | RYPA2103 | 367271 | 5376767 | 186.2 | 2.9 | 0 | 0.4 | 0.4 | 89 | 58.26 | 2.82 | 1.95 | 0.066 | 0.029 | 3.45 | 5.82 |
| Area A | RYPA2103 | 367271 | 5376767 | 186.2 | 2.9 | 0.4 | 0.7 | 0.3 | 86 | 56.22 | 1.73 | 2.51 | 0.107 | 0.021 | 3.73 | 8.73 |
| Area A | RYPA2103 | 367271 | 5376767 | 186.2 | 2.9 | 0.7 | 2.4 | 1.7 | 77 | 54.59 | 1.69 | 3.02 | 0.106 | 0.022 | 3.68 | 10.51 |
| Area A | RYPA2104 | 367297 | 5376749 | 186.2 | 3 | 0.8 | 1.2 | 0.4 | 80 | 54.08 | 3.08 | 2.85 | 0.139 | 0.022 | 3.61 | 10.08 |
| Area A | RYPA2104 | 367297 | 5376749 | 186.2 | 3 | 0 | 0.8 | 0.8 | 83 | 57.13 | 2.74 | 1.98 | 0.074 | 0.028 | 3.62 | 7.37 |
| Area A | RYPA2202 | 367276 | 5376871 | 189.9 | 5.1 | 0 | 0.3 | 0.3 | 80 | 58.35 | 3.61 | 1.83 | 0.064 | 0.032 | 3.41 | 4.78 |
| Area A | RYPA2203 | 367320 | 5376829 | 191.1 | 2.2 | 0 | 0.3 | 0.3 | 89 | 60.98 | 2.7 | 1.45 | 0.037 | 0.033 | 3.24 | 2.83 |
| Area A | RYPA2203 | 367320 | 5376829 | 191.1 | 2.2 | 0.3 | 0.8 | 0.5 | 76 | 53.11 | 5.24 | 2.46 | 0.105 | 0.025 | 4.15 | 9.13 |
| Area A | RYPA2204 | 367363 | 5376809 | 190.4 | 2.3 | 0 | 0.4 | 0.4 | 86 | 60 | 2.4 | 1.68 | 0.048 | 0.031 | 3.19 | 4.47 |
| Area A | RYPA2205 | 367390 | 5376783 | 188.9 | 3.1 | 0 | 0.3 | 0.3 | 92 | 60.62 | 2.48 | 1.89 | 0.042 | 0.035 | 3.02 | 3.08 |
| Area A | RYPA2302 | 367330 | 5376943 | 191.5 | 5 | 0 | 0.4 | 0.4 | 85 | 58.75 | 2.63 | 1.76 | 0.066 | 0.033 | 3.53 | 5.36 |
| Area A | RYPA2302 | 367330 | 5376943 | 191.5 | 5 | 0.4 | 1 | 0.6 | 82 | 53.94 | 3.38 | 2.91 | 0.133 | 0.021 | 3.41 | 10.48 |
| Area A | RYPA2304 | 367404 | 5376882 | 189 | 2.7 | 0 | 0.3 | 0.3 | 85 | 58.57 | 3.49 | 2.3 | 0.077 | 0.038 | 3.16 | 4.66 |
| Area A | RYPA2402 | 367396 | 5377033 | 191.3 | 2.4 | 0 | 0.4 | 0.4 | 86 | 59.6 | 4.45 | 1.72 | 0.053 | 0.039 | 3.21 | 2.88 |
| Area A | RYPA2404 | 367468 | 5376969 | 191.4 | 2.3 | 0 | 0.4 | 0.4 | 85 | 58.44 | 4.11 | 2.02 | 0.071 | 0.028 | 2.99 | 4.6 |
| Area A | RYPA2406 | 367529 | 5376903 | 179.8 | 1.5 | 0 | 0.2 | 0.2 | 83 | 55.7 | 4.41 | 3.55 | 0.057 | 0.021 | 2.53 | 7.56 |
| Area A | RYPA2407 | 367577 | 5376860 | 190.8 | 1.1 | 0 | 0.4 | 0.4 | 86 | 55.26 | 5.39 | 3.31 | 0.068 | 0.026 | 2.4 | 7.63 |
| Area A | RYPA2408 | 367615 | 5376833 | 191.4 | 2.2 | 0 | 0.2 | 0.2 | 81 | 60.01 | 3.25 | 2.19 | 0.052 | 0.035 | 2.56 | 3.84 |
| Area A | RYPA2501 | 367424 | 5377144 | 182 | 2 | 0 | 0.3 | 0.3 | 78 | 59.38 | 3.53 | 2.08 | 0.058 | 0.034 | 2.38 | 4.65 |
| Area A | RYPA2502 | 367462 | 5377111 | 192.2 | 2.7 | 0 | 0.5 | 0.5 | 83 | 56.22 | 2.42 | 2.63 | 0.064 | 0.029 | 2.85 | 9.28 |
| Area A | RYPA2502 | 367462 | 5377111 | 192.2 | 2.7 | 0.5 | 1.1 | 0.6 | 82 | 55.06 | 2.91 | 2.8 | 0.071 | 0.024 | 2.82 | 10.1 |
| Area A | RYPA2511 | 367784 | 5376813 | 172.1 | 1.1 | 0 | 0.2 | 0.2 | 87 | 58.19 | 3.96 | 2.44 | 0.056 | 0.027 | 2.72 | 5.05 |
| Area A | RYPA2602 | 367579 | 5377154 | 195 | 3 | 0 | 0.6 | 0.6 | 85 | 57.24 | 2.16 | 2.55 | 0.065 | 0.029 | 2.85 | 7.8 |
| Area A | RYPA2603 | 367615 | 5377110 | 203 | 3.2 | 0 | 0.5 | 0.5 | 85 | 56.15 | 2.59 | 2.98 | 0.072 | 0.029 | 2.83 | 9.2 |
| Area A | RYPA2604 | 367653 | 5377079 | 206.1 | 2.4 | 0 | 0.7 | 0.7 | 89 | 60.81 | 1.69 | 2.08 | 0.05 | 0.04 | 2.47 | 4.68 |
| Area A | RYPA2608 | 367779 | 5376951 | 182.4 | 2.8 | 0 | 0.5 | 0.5 | 82 | 56.15 | 2.8 | 2.74 | 0.083 | 0.028 | 3.35 | 8.4 |
| Area A | RYPA2608 | 367779 | 5376951 | 182.4 | 2.8 | 0.5 | 1.5 | 1 | 78 | 56.21 | 2.95 | 2.76 | 0.081 | 0.028 | 3.38 | 7.69 |
| Area A | RYPA2701 | 367690 | 5377191 | 194.2 | 2.4 | 0 | 0.8 | 0.8 | 90 | 59.66 | 2.65 | 2.04 | 0.051 | 0.031 | 3.17 | 4.39 |
| Area A | RYPA2701 | 367690 | 5377191 | 194.2 | 2.4 | 0.8 | 1.8 | 1 | 84 | 55.65 | 4.51 | 2.85 | 0.07 | 0.029 | 3.65 | 6.48 |
| Area A | RYPA2702 | 367737 | 5377152 | 208.4 | 3.4 | 0 | 0.4 | 0.4 | 83 | 59.24 | 1.58 | 2.08 | 0.068 | 0.032 | 2.74 | 6.48 |
| Area A | RYPA2702 | 367737 | 5377152 | 208.4 | 3.4 | 0.4 | 2.7 | 2.3 | 78 | 55.6 | 2.12 | 2.27 | 0.094 | 0.013 | 2.61 | 10.54 |
| Area A | RYPA2703 | 367757 | 5377119 | 213.3 | 4 | 2.5 | 4 | 1.5 | 77 | 53.45 | 1.63 | 2.93 | 0.119 | 0.022 | 3.89 | 12.14 |
| Area A | RYPA2703 | 367757 | 5377119 | 213.3 | 4 | 0 | 0.4 | 0.4 | 90 | 60.26 | 1.86 | 2.21 | 0.051 | 0.042 | 2.75 | 4.87 |
| Area A | RYPA2703 | 367757 | 5377119 | 213.3 | 4 | 0.4 | 2.5 | 2.1 | 89 | 54.81 | 2.05 | 2.06 | 0.123 | 0.019 | 3.76 | 10.98 |
| Area A | RYPA2704 | 367799 | 5377079 | 211.4 | 1.8 | 0 | 1 | 1 | 76 | 53.3 | 5.52 | 2.61 | 0.073 | 0.026 | 3.75 | 9 |
| Area A | RYPA2705 | 367832 | 5377044 | 205.4 | 2.1 | 0 | 0.5 | 0.5 | 88 | 57.41 | 2.8 | 2.08 | 0.056 | 0.032 | 3.4 | 7.1 |
| Area A | RYPA2706 | 367863 | 5377006 | 200.9 | 3.7 | 0 | 1.3 | 1.3 | 79 | 57.35 | 2.55 | 2.3 | 0.073 | 0.027 | 2.98 | 7.91 |
| Area A | RYPA2706 | 367863 | 5377006 | 200.9 | 3.7 | 1.3 | 2.7 | 1.4 | 87 | 55.71 | 3.7 | 2.61 | 0.075 | 0.026 | 2.9 | 8.3 |
| Area A | RYPA2707 | 367900 | 5376975 | 201.3 | 1.8 | 0 | 0.3 | 0.3 | 85 | 57.11 | 2.63 | 2.3 | 0.058 | 0.024 | 3.2 | 7.37 |
| Area A | RYPA2801 | 367783 | 5377217 | 197 | 2.1 | 0 | 0.6 | 0.6 | 88 | 60.65 | 2.22 | 1.93 | 0.05 | 0.033 | 2.87 | 3.86 |
| Area A | RYPA2801 | 367783 | 5377217 | 197 | 2.1 | 0.6 | 1.7 | 1.1 | 83 | 58.63 | 3.47 | 2.19 | 0.063 | 0.029 | 3.21 | 4.9 |
| Area A | RYPA2901 | 367916 | 5377293 | 211.5 | 1.7 | 0 | 0.7 | 0.7 | 91 | 60.03 | 1.13 | 1.78 | 0.061 | 0.029 | 2.88 | 6.46 |
| Area A | RYPA2904 | 368029 | 5377181 | 229.4 | 1.2 | 0 | 0.7 | 0.7 | 82 | 60.26 | 1.71 | 2.25 | 0.045 | 0.033 | 2.55 | 4.84 |
| Area A | RYPA2905 | 368062 | 5377151 | 218 | 1.8 | 0 | 0.8 | 0.8 | 87 | 62.76 | 1.86 | 1.83 | 0.042 | 0.044 | 2.07 | 2.68 |
| Area A | RYPA2906 | 368100 | 5377113 | 205.3 | 1.3 | 0 | 0.6 | 0.6 | 89 | 63.22 | 2.12 | 1.72 | 0.039 | 0.048 | 1.87 | 1.78 |
| Area C | RYPC0310 | 367821 | 5376423 | 187.3 | 2.2 | 0 | 0.3 | 0.3 | 78 | 55.64 | 4.36 | 3 | 0.13 | 0.027 | 2.64 | 8.1 |
| Area C | RYPC0311 | 367838 | 5376403 | 187.5 | 2.1 | 0 | 0.9 | 0.9 | 84 | 53.68 | 3.38 | 3.68 | 0.136 | 0.023 | 3.05 | 10.46 |
| Area C | RYPC0405 | 367770 | 5376618 | 185 | 4 | 0 | 0.5 | 0.5 | 81 | 57.85 | 4.96 | 2.12 | 0.054 | 0.038 | 2.96 | 4.83 |
| Area C | RYPC0406 | 367797 | 5376590 | 187.1 | 2.8 | 0 | 0.8 | 0.8 | 86 | 59.68 | 2.27 | 1.98 | 0.053 | 0.028 | 2.81 | 5.29 |
| Area C | RYPC0407 | 367832 | 5376545 | 187.8 | 2.8 | 0 | 0.3 | 0.3 | 86 | 60.06 | 2.89 | 1.96 | 0.075 | 0.025 | 3 | 3.85 |
| Area C | RYPC0407 | 367832 | 5376545 | 187.8 | 2.8 | 0.3 | 0.8 | 0.5 | 84 | 54.03 | 4.43 | 2.87 | 0.126 | 0.025 | 3.46 | 9.43 |
| Area C | RYPC0408 | 367877 | 5376505 | 188 | 3 | 0 | 0.5 | 0.5 | 80 | 56.46 | 4 | 2.4 | 0.083 | 0.022 | 3.16 | 7.08 |
| Area C | RYPC0408 | 367877 | 5376505 | 188 | 3 | 0.5 | 0.7 | 0.2 | 85 | 53.44 | 4.24 | 3.04 | 0.134 | 0.023 | 3.15 | 10.3 |
| Area C | RYPC0512 | 367857 | 5376638 | 178.6 | 3.9 | 0 | 0.2 | 0.2 | 82 | 58.55 | 4.47 | 1.93 | 0.045 | 0.021 | 3.09 | 3.97 |
| Area C | RYPC0513 | 367883 | 5376621 | 185.2 | 0.7 | 0.3 | 0.5 | 0.2 | 76 | 56.77 | 4.15 | 2.25 | 0.065 | 0.019 | 3.26 | 6.55 |
| Area C | RYPC0513 | 367883 | 5376621 | 185.2 | 0.7 | 0 | 0.3 | 0.3 | 77 | 56.4 | 4 | 2.13 | 0.048 | 0.021 | 3.16 | 5.71 |
| Area C | RYPC0514 | 367915 | 5376605 | 189.9 | 1.2 | 0.5 | 0.7 | 0.2 | 76 | 53.68 | 1.88 | 3.21 | 0.075 | 0.018 | 3.62 | 11.7 |
| Area C | RYPC0514 | 367915 | 5376605 | 189.9 | 1.2 | 0 | 0.3 | 0.3 | 82 | 58.03 | 2.76 | 2.12 | 0.051 | 0.026 | 3.23 | 6.33 |

| Deposit | Pit/Hole | East m | North m | RL m | EOH m | From m | To m | Interval m | MR % | Fe % | $SiO_2$ % | $Al_2O_3$ % | S % | P % | Cr % | LOI % |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Area C | RYPC0515 | 367943 | 5376581 | 190.6 | 3.8 | 0 | 0.3 | 0.3 | 94 | 62.82 | 2.07 | 1.55 | 0.033 | 0.034 | 2.52 | 2.09 |
| Area C | RYPC0516 | 367991 | 5376531 | 189.9 | 2 | 0 | 0.3 | 0.3 | 84 | 60.29 | 3.91 | 1.93 | 0.045 | 0.026 | 2.41 | 3.82 |
| Area C | RYPC0614 | 368053 | 5376616 | 189.9 | 2.7 | 0 | 0.3 | 0.3 | 97 | 63.3 | 2.16 | 1.61 | 0.035 | 0.045 | 1.71 | 2.65 |
| Area C | RYPC0615 | 368083 | 5376573 | 189.7 | 2.7 | 0 | 0.3 | 0.3 | 95 | 62.36 | 2.72 | 1.98 | 0.044 | 0.036 | 1.46 | 2.22 |
| Area C | RYPC0615 | 368083 | 5376573 | 189.7 | 2.7 | 0.3 | 0.7 | 0.4 | 87 | 59.33 | 3.94 | 2.85 | 0.073 | 0.034 | 1.6 | 5.26 |
| Area C | RYPC0616 | 368127 | 5376523 | 189.3 | 2.2 | 0 | 0.4 | 0.4 | 94 | 60.82 | 5.73 | 1.61 | 0.039 | 0.032 | 1.54 | 2.59 |
| Area C | RYPC0616 | 368127 | 5376523 | 189.3 | 2.2 | 0.4 | 0.6 | 0.2 | 83 | 58.05 | 6.07 | 2.13 | 0.071 | 0.03 | 1.65 | 5.48 |
| Area C | RYPC0617 | 368150 | 5376502 | 189.5 | 2.6 | 0.3 | 1.6 | 1.3 | 89 | 61.16 | 3.49 | 1.83 | 0.072 | 0.036 | 1.68 | 3.96 |
| Area C | RYPC0617 | 368150 | 5376502 | 189.5 | 2.6 | 0 | 0.3 | 0.3 | 93 | 62.99 | 2.72 | 1.59 | 0.043 | 0.038 | 1.53 | 2.61 |
| Area C | RYPC0618 | 368185 | 5376488 | 190.8 | 2.2 | 0.3 | 1.6 | 1.3 | 88 | 54.1 | 7.85 | 2.7 | 0.116 | 0.025 | 2.34 | 7.58 |
| Area C | RYPC0618 | 368185 | 5376488 | 190.8 | 2.2 | 0 | 0.3 | 0.3 | 95 | 61.46 | 3.34 | 1.66 | 0.04 | 0.035 | 1.73 | 2.42 |
| Area C | RYPC0620 | 368255 | 5376395 | 189.9 | 1.2 | 0 | 0.2 | 0.2 | 90 | 53.15 | 12.62 | 2.29 | 0.067 | 0.03 | 1.61 | 5.85 |
| Area C | RYPC0712 | 368091 | 5376703 | 186.3 | 3.2 | 0 | 0.5 | 0.5 | 91 | 60.8 | 3.38 | 2.08 | 0.052 | 0.032 | 1.34 | 4.89 |
| Area C | RYPC0715 | 368188 | 5376597 | 194.7 | 1.9 | 0 | 0.3 | 0.3 | 89 | 58.71 | 5.2 | 2.1 | 0.064 | 0.027 | 1.35 | 5.97 |
| Area C | RYPC0716 | 368251 | 5376529 | 199.3 | 3.3 | 0 | 1.1 | 1.1 | 92 | 61.82 | 2.2 | 1.95 | 0.05 | 0.035 | 1.73 | 4.05 |
| Area C | RYPC0717 | 368268 | 5376495 | 197.1 | 3.6 | 0 | 0.4 | 0.4 | 93 | 63.81 | 1.52 | 1.47 | 0.039 | 0.044 | 1.72 | 2.36 |
| Area C | RYPC0718 | 368305 | 5376453 | 195.5 | 3.3 | 0 | 0.2 | 0.2 | 94 | 63.58 | 3.14 | 1.4 | 0.034 | 0.034 | 1.61 | 1.48 |
| Area C | RYPC0719 | 368349 | 5376413 | 198.4 | 3.5 | 0 | 0.2 | 0.2 | 81 | 60.31 | 4.38 | 1.68 | 0.041 | 0.029 | 1.97 | 3.94 |
| Area C | RYPC0810 | 368214 | 5376746 | 186.9 | 2.1 | 0 | 0.8 | 0.8 | 96 | 63.71 | 2.4 | 1.57 | 0.04 | 0.039 | 1.83 | 1.78 |
| Area C | RYPC0811 | 368245 | 5376704 | 195.7 | 2.7 | 0 | 1.6 | 1.6 | 93 | 62.69 | 1.97 | 1.76 | 0.041 | 0.033 | 1.89 | 2.98 |
| Area C | RYPC0812 | 368277 | 5376680 | 201.6 | 2.3 | 0 | 0.6 | 0.6 | 90 | 60.01 | 4.09 | 2.34 | 0.047 | 0.029 | 1.72 | 4.34 |
| Area C | RYPC0813 | 368295 | 5376633 | 207.3 | 2.5 | 0.3 | 1.3 | 1 | 77 | 55.37 | 2.48 | 2.63 | 0.085 | 0.018 | 1.74 | 12.25 |
| Area C | RYPC0813 | 368295 | 5376633 | 207.3 | 2.5 | 0 | 0.3 | 0.3 | 83 | 62.68 | 1.22 | 1.49 | 0.053 | 0.032 | 2.35 | 3.32 |
| Area C | RYPC0814 | 368338 | 5376592 | 213 | 2.6 | 0 | 0.6 | 0.6 | 84 | 59.36 | 2.52 | 2.27 | 0.052 | 0.029 | 2.15 | 6.64 |
| Area C | RYPC0815 | 368379 | 5376556 | 212.7 | 2.7 | 0 | 0.6 | 0.6 | 92 | 60.34 | 2.7 | 2 | 0.056 | 0.037 | 2.09 | 5.3 |
| Area C | RYPC0816 | 368402 | 5376529 | 212.1 | 2.4 | 0 | 0.9 | 0.9 | 90 | 58.2 | 2.74 | 2.19 | 0.059 | 0.025 | 2.27 | 7.62 |
| Area C | RYPC0817 | 368442 | 5376484 | 208.5 | 3.4 | 0.9 | 1.7 | 0.8 | 86 | 53.85 | 6.52 | 2.76 | 0.126 | 0.024 | 2.26 | 9.38 |
| Area C | RYPC0817 | 368442 | 5376484 | 208.5 | 3.4 | 0 | 0.9 | 0.9 | 91 | 60.97 | 2.31 | 1.89 | 0.062 | 0.037 | 1.89 | 5.04 |
| Area C | RYPC0819 | 368504 | 5376414 | 197.6 | 3 | 0 | 1.2 | 1.2 | 90 | 55.37 | 7.14 | 2.66 | 0.087 | 0.022 | 1.62 | 7.52 |
| Area C | RYPC0911 | 368294 | 5376798 | 185.1 | 2.2 | 0 | 0.3 | 0.3 | 88 | 57.16 | 6.55 | 2.32 | 0.054 | 0.022 | 2.41 | 4.94 |
| Area C | RYPC0912 | 368322 | 5376762 | 191.9 | 2.8 | 0 | 1.8 | 1.8 | 89 | 57.74 | 5.28 | 2.12 | 0.095 | 0.028 | 2.38 | 5.6 |
| Area C | RYPC0913 | 368358 | 5376718 | 202.2 | 3.2 | 0 | 2.2 | 2.2 | 91 | 60.4 | 3.42 | 2.08 | 0.065 | 0.031 | 1.77 | 4.57 |
| Area C | RYPC0914 | 368396 | 5376690 | 210.6 | 2.3 | 0 | 1.3 | 1.3 | 89 | 57.68 | 3.12 | 2.57 | 0.08 | 0.03 | 1.59 | 8.63 |
| Area C | RYPC0915 | 368425 | 5376667 | 216.2 | 2.5 | 0 | 1 | 1 | 90 | 57.77 | 3.12 | 2.25 | 0.052 | 0.026 | 2.2 | 7.92 |
| Area C | RYPC0916 | 368451 | 5376631 | 221.7 | 2.6 | 0 | 0.9 | 0.9 | 84 | 55.05 | 4.6 | 2.61 | 0.067 | 0.026 | 2.53 | 9.66 |
| Area C | RYPC0918 | 368516 | 5376558 | 220.1 | 2.4 | 0 | 0.4 | 0.4 | 82 | 56.28 | 4.38 | 2.17 | 0.063 | 0.025 | 2.76 | 7.86 |
| Area C | RYPC0919 | 368547 | 5376493 | 210.9 | 2.4 | 0 | 0.9 | 0.9 | 92 | 59.81 | 3.17 | 2.08 | 0.049 | 0.039 | 1.99 | 5.46 |
| Area C | RYPC1010 | 368392 | 5376830 | 187.6 | 1 | 0 | 0.2 | 0.2 | 79 | 57.83 | 4.32 | 2.72 | 0.061 | 0.019 | 2.25 | 5.9 |
| Area C | RYPC1011 | 368420 | 5376785 | 198.8 | 2.3 | 0 | 0.4 | 0.4 | 94 | 61.99 | 2.4 | 1.95 | 0.043 | 0.034 | 2.26 | 2.86 |
| Area C | RYPC1012 | 368449 | 5376738 | 207.9 | 3.7 | 0 | 0.2 | 0.2 | 94 | 63.1 | 2.07 | 1.78 | 0.036 | 0.039 | 1.83 | 2.43 |
| Area C | RYPC1012 | 368449 | 5376738 | 207.9 | 3.7 | 0.2 | 3.3 | 3.1 | 85 | 54.17 | 6.87 | 2.81 | 0.121 | 0.025 | 3.06 | 7.5 |
| Area C | RYPC1014 | 368516 | 5376682 | 220.8 | 3 | 0 | 0.6 | 0.6 | 92 | 62.66 | 0.98 | 1.66 | 0.045 | 0.038 | 1.74 | 4.4 |
| Area C | RYPC1014 | 368516 | 5376682 | 220.8 | 3 | 0.6 | 1.2 | 0.6 | 88 | 55.68 | 1.5 | 2.55 | 0.059 | 0.02 | 2.14 | 12.31 |
| Area C | RYPC1015 | 368544 | 5376661 | 224.2 | 3.3 | 0 | 0.8 | 0.8 | 95 | 63.71 | 1.2 | 1.55 | 0.033 | 0.04 | 1.95 | 2.5 |
| Area C | RYPC1016 | 368588 | 5376623 | 221.6 | 3.5 | 0 | 0.2 | 0.2 | 82 | 56.98 | 2.2 | 2.91 | 0.065 | 0.027 | 2.13 | 9.46 |
| Area C | RYPC1017 | 368622 | 5376565 | 211.3 | 2 | 0 | 0.2 | 0.2 | 95 | 63.18 | 2.82 | 1.68 | 0.037 | 0.044 | 1.6 | 2.08 |
| Area C | RYPC1018 | 368642 | 5376543 | 207.9 | 2 | 0 | 0.2 | 0.2 | 92 | 60.35 | 5.03 | 1.76 | 0.043 | 0.033 | 1.8 | 3.25 |
| Area C | RYPC1111 | 368508 | 5376848 | 196.1 | 2.7 | 0.3 | 1.4 | 1.1 | 85 | 56.7 | 5.78 | 2.63 | 0.112 | 0.023 | 2.37 | 5.94 |
| Area C | RYPC1111 | 368508 | 5376848 | 196.1 | 2.7 | 0 | 0.3 | 0.3 | 90 | 62.24 | 2.46 | 2.08 | 0.05 | 0.03 | 1.76 | 3.09 |
| Area C | RYPC1112 | 368525 | 5376812 | 206.5 | 3.7 | 0 | 0.3 | 0.3 | 96 | 64.78 | 0.98 | 1.59 | 0.036 | 0.035 | 1.41 | 1.99 |
| Area C | RYPC1112 | 368525 | 5376812 | 206.5 | 3.7 | 0.3 | 1.3 | 1 | 90 | 59.36 | 2.16 | 2.83 | 0.075 | 0.027 | 1.78 | 6.66 |
| Area C | RYPC1113 | 368552 | 5376785 | 212.8 | 3.2 | 0 | 0.8 | 0.8 | 96 | 64.47 | 1.07 | 1.66 | 0.047 | 0.04 | 1.37 | 2.46 |
| Area C | RYPC1113 | 368552 | 5376785 | 212.8 | 3.2 | 0.8 | 1.5 | 0.7 | 85 | 55.4 | 5.95 | 2.91 | 0.119 | 0.022 | 2.18 | 7.64 |
| Area C | RYPC1114 | 368589 | 5376754 | 221.3 | 2.7 | 0 | 0.5 | 0.5 | 91 | 59.86 | 2.37 | 2.15 | 0.053 | 0.028 | 2.15 | 5.91 |
| Area C | RYPC1114 | 368589 | 5376754 | 221.3 | 2.7 | 0.5 | 1.1 | 0.6 | 90 | 55.73 | 3.74 | 2.7 | 0.072 | 0.021 | 2.28 | 9.6 |
| Area C | RYPC1115 | 368619 | 5376729 | 227.4 | 4.5 | 0 | 0.2 | 0.2 | 92 | 60.12 | 1.01 | 2.06 | 0.041 | 0.032 | 2.27 | 6.81 |
| Area C | RYPC1115 | 368619 | 5376729 | 227.4 | 4.5 | 0.2 | 2 | 1.8 | 81 | 54.68 | 2.97 | 2.78 | 0.074 | 0.018 | 2.6 | 11.28 |
| Area C | RYPC1116 | 368655 | 5376684 | 222.5 | 2.8 | 0 | 0.5 | 0.5 | 91 | 59.69 | 2.16 | 1.93 | 0.059 | 0.029 | 1.97 | 6.84 |
| Area C | RYPC1117 | 368686 | 5376641 | 213.4 | 2.2 | 0 | 0.3 | 0.3 | 91 | 59.61 | 4.43 | 2.42 | 0.051 | 0.038 | 1.58 | 5.04 |
| Area C | RYPC1203 | 368511 | 5377011 | 194.2 | 1.1 | 0 | 0.5 | 0.5 | 82 | 59.54 | 2.7 | 2.63 | 0.054 | 0.026 | 2.68 | 4.61 |
| Area C | RYPC1205 | 368567 | 5376937 | 199.7 | 2.2 | 0 | 0.4 | 0.4 | 82 | 54.78 | 4.41 | 3.08 | 0.071 | 0.019 | 2.51 | 9.52 |
| Area C | RYPC1206 | 368604 | 5376892 | 209.6 | 2.9 | 0 | 0.4 | 0.4 | 86 | 60.35 | 2.12 | 2.23 | 0.055 | 0.028 | 2.71 | 4.5 |

| Deposit | Pit/Hole | East m | North m | RL m | EOH m | From m | To m | Interval m | MR % | Fe % | $SiO_2$ % | $Al_2O_3$ % | S % | P % | Cr % | LOI % |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Area C | RYPC1206 | 368604 | 5376892 | 209.6 | 2.9 | 0.4 | 0.9 | 0.5 | 82 | 56.5 | 4.04 | 3.04 | 0.092 | 0.022 | 3 | 6.64 |
| Area C | RYPC1207 | 368628 | 5376855 | 219.9 | 2.6 | 0 | 0.3 | 0.3 | 79 | 55.83 | 1.3 | 2.95 | 0.075 | 0.016 | 2.44 | 11.35 |
| Area C | RYPC1208 | 368668 | 5376830 | 229.7 | 3.8 | 0 | 0.3 | 0.3 | 88 | 57.1 | 4.79 | 2.59 | 0.056 | 0.028 | 2.63 | 6.03 |
| Area C | RYPC1209 | 368686 | 5376804 | 228.8 | 2.5 | 0 | 0.5 | 0.5 | 93 | 60.34 | 2.82 | 2.17 | 0.048 | 0.031 | 2.37 | 4.35 |
| Area C | RYPC1210 | 368739 | 5376757 | 222.5 | 2.5 | 0 | 0.3 | 0.3 | 92 | 61.54 | 2.46 | 1.83 | 0.042 | 0.034 | 2.13 | 3.68 |
| Area C | RYPC1210 | 368739 | 5376757 | 222.5 | 2.5 | 0.3 | 0.9 | 0.6 | 84 | 57.9 | 2.8 | 2.61 | 0.062 | 0.028 | 1.98 | 7.95 |
| Area C | RYPC1211 | 368763 | 5376722 | 213.2 | 2.9 | 1.2 | 1.5 | 0.3 | 82 | 53.53 | 7.08 | 2.81 | 0.096 | 0.027 | 3.04 | 7.98 |
| Area C | RYPC1211 | 368763 | 5376722 | 213.2 | 2.9 | 0 | 0.6 | 0.6 | 94 | 62.76 | 2.59 | 1.76 | 0.033 | 0.037 | 2.02 | 2.12 |
| Area C | RYPC1303 | 368571 | 5377073 | 203.5 | 3.9 | 0 | 0.2 | 0.2 | 77 | 55.08 | 3.72 | 3.02 | 0.057 | 0.019 | 3.04 | 8.95 |
| Area C | RYPC1304 | 368607 | 5377036 | 208.7 | 3.7 | 0 | 0.5 | 0.5 | 90 | 60.17 | 2.95 | 2.23 | 0.048 | 0.03 | 2.73 | 3.75 |
| Area C | RYPC1304 | 368607 | 5377036 | 208.7 | 3.7 | 0.5 | 2.1 | 1.6 | 76 | 55.65 | 3.87 | 3.38 | 0.084 | 0.021 | 2.78 | 8.04 |
| Area C | RYPC1305 | 368641 | 5376994 | 215.1 | 3.4 | 0 | 0.4 | 0.4 | 85 | 57.38 | 4.3 | 2.44 | 0.069 | 0.025 | 2.67 | 6.25 |
| Area C | RYPC1306 | 368676 | 5376963 | 224 | 3.6 | 0 | 0.4 | 0.4 | 87 | 58.76 | 2.42 | 2.4 | 0.049 | 0.024 | 2.51 | 6.49 |
| Area C | RYPC1307 | 368705 | 5376924 | 231 | 6.5 | 0 | 0.6 | 0.6 | 92 | 61.56 | 2.1 | 2.08 | 0.036 | 0.029 | 2.49 | 3.39 |
| Area C | RYPC1307 | 368705 | 5376924 | 231 | 6.5 | 0.6 | 1.1 | 0.5 | 80 | 55.6 | 5.09 | 2.64 | 0.085 | 0.019 | 2.61 | 7.87 |
| Area C | RYPC1310 | 368917 | 5376693 | 213.1 | 2.1 | 0 | 0.5 | 0.5 | 80 | 55.38 | 8.49 | 2.1 | 0.057 | 0.016 | 1.82 | 6.16 |
| Area C | RYPC1311 | 368952 | 5376662 | 225.9 | 2.2 | 0 | 1.1 | 1.1 | 91 | 57.9 | 6.7 | 1.78 | 0.039 | 0.022 | 2.03 | 4.85 |
| Area C | RYPC1313 | 369025 | 5376583 | 224.8 | 2.1 | 0 | 0.8 | 0.8 | 85 | 55.87 | 5.15 | 2.3 | 0.066 | 0.026 | 2.95 | 7.07 |
| Area C | RYPC1402 | 368641 | 5377106 | 212.2 | 1.8 | 0 | 0.2 | 0.2 | 76 | 56.25 | 4.13 | 3.19 | 0.067 | 0.023 | 2.84 | 7.01 |
| Area C | RYPC2104 | 367831 | 5376481 | 187.3 | 2.4 | 0 | 1 | 1 | 80 | 53.1 | 4.15 | 3.89 | 0.144 | 0.033 | 3.27 | 10.25 |
| Area C | RYPC2105 | 367861 | 5376443 | 187.9 | 2.6 | 0 | 0.9 | 0.9 | 85 | 55.61 | 3.85 | 3.12 | 0.128 | 0.029 | 2.92 | 8.09 |
| Area C | RYPC2201 | 367809 | 5376628 | 182.3 | 3.5 | 0 | 0.6 | 0.6 | 83 | 53.01 | 7.12 | 2.91 | 0.093 | 0.021 | 3.46 | 7.92 |
| Area C | RYPC2202 | 367839 | 5376599 | 187.5 | 2.5 | 1.3 | 2.3 | 1 | 80 | 54.89 | 1.8 | 3.02 | 0.102 | 0.02 | 3.89 | 9.62 |
| Area C | RYPC2202 | 367839 | 5376599 | 187.5 | 2.5 | 0 | 0.4 | 0.4 | 78 | 55.03 | 7.02 | 2.17 | 0.07 | 0.024 | 3.04 | 6.46 |
| Area C | RYPC2203 | 367878 | 5376571 | 188.4 | 5.2 | 0 | 0.4 | 0.4 | 86 | 58.89 | 3.79 | 1.74 | 0.068 | 0.02 | 3.09 | 4.74 |
| Area C | RYPC2204 | 367917 | 5376533 | 189 | 3.2 | 0 | 0.2 | 0.2 | 85 | 58.61 | 2.74 | 2.25 | 0.081 | 0.024 | 2.93 | 5.64 |
| Area C | RYPC2205 | 367937 | 5376505 | 188.8 | 4 | 0 | 0.2 | 0.2 | 87 | 55.02 | 7.12 | 2.23 | 0.115 | 0.026 | 3.04 | 6.7 |
| Area C | RYPC2301 | 367926 | 5376664 | 172.6 | 1.7 | 0 | 0.4 | 0.4 | 96 | 59.76 | 5.65 | 1.61 | 0.062 | 0.028 | 2.32 | 3.13 |
| Area C | RYPC2302 | 367957 | 5376627 | 185.8 | 1.3 | 0 | 0.4 | 0.4 | 81 | 55.47 | 4.15 | 2.93 | 0.092 | 0.018 | 2.21 | 9.38 |
| Area C | RYPC2303 | 367984 | 5376594 | 191.4 | 2 | 0 | 0.4 | 0.4 | 87 | 60.2 | 3.4 | 1.62 | 0.044 | 0.029 | 3.16 | 3.31 |
| Area C | RYPC2402 | 368061 | 5376666 | 188.5 | 1.2 | 0 | 0.5 | 0.5 | 89 | 58.02 | 4.71 | 2.1 | 0.06 | 0.028 | 1.89 | 6.38 |
| Area C | RYPC2402 | 368061 | 5376666 | 188.5 | 1.2 | 0.5 | 1 | 0.5 | 79 | 54.56 | 6.01 | 2.76 | 0.098 | 0.02 | 2.01 | 9.22 |
| Area C | RYPC2403 | 368100 | 5376623 | 190.5 | 2.5 | 0 | 0.9 | 0.9 | 93 | 61.26 | 3.36 | 2.23 | 0.055 | 0.036 | 1.29 | 4.12 |
| Area C | RYPC2403 | 368100 | 5376623 | 190.5 | 2.5 | 0.9 | 2.1 | 1.2 | 83 | 55.97 | 5.58 | 2.85 | 0.12 | 0.027 | 1.67 | 8.15 |
| Area C | RYPC2404 | 368135 | 5376587 | 191.5 | 0.8 | 0 | 0.3 | 0.3 | 82 | 56.57 | 7.14 | 2.53 | 0.084 | 0.024 | 1.46 | 6.44 |
| Area C | RYPC2405 | 368167 | 5376545 | 191.3 | 1.4 | 0 | 0.4 | 0.4 | 93 | 58.67 | 4.09 | 2.91 | 0.065 | 0.026 | 1.3 | 6.43 |
| Area C | RYPC2405 | 368167 | 5376545 | 191.3 | 1.4 | 0.4 | 0.7 | 0.3 | 79 | 54.4 | 6.8 | 3.55 | 0.129 | 0.018 | 1.55 | 8.65 |
| Area C | RYPC2406 | 368197 | 5376510 | 193.3 | 1 | 0 | 0.5 | 0.5 | 88 | 59.66 | 2.61 | 2.76 | 0.065 | 0.027 | 1.3 | 6.58 |
| Area C | RYPC2407 | 368232 | 5376470 | 192.7 | 2.1 | 0 | 0.5 | 0.5 | 94 | 62.25 | 2.84 | 1.68 | 0.052 | 0.038 | 1.76 | 3.05 |
| Area C | RYPC2407 | 368232 | 5376470 | 192.7 | 2.1 | 0.5 | 1 | 0.5 | 84 | 55.66 | 7.47 | 2.3 | 0.116 | 0.028 | 2.25 | 6.33 |
| Area C | RYPC2408 | 368267 | 5376440 | 192.3 | 1.3 | 0 | 0.2 | 0.2 | 87 | 54.4 | 11.38 | 1.98 | 0.091 | 0.021 | 1.91 | 5.45 |
| Area C | RYPC2408 | 368267 | 5376440 | 192.3 | 1.3 | 0.2 | 0.8 | 0.6 | 84 | 56.61 | 9.41 | 1.87 | 0.082 | 0.024 | 1.83 | 4.42 |
| Area C | RYPC2409 | 368294 | 5376403 | 192.7 | 0.9 | 0 | 0.3 | 0.3 | 87 | 55.54 | 7.47 | 2.34 | 0.06 | 0.013 | 1.34 | 8.05 |
| Area C | RYPC2601 | 368248 | 5376775 | 184.1 | 1.1 | 0 | 0.2 | 0.2 | 95 | 61.99 | 4.24 | 1.55 | 0.039 | 0.027 | 1.7 | 2.25 |
| Area C | RYPC2602 | 368281 | 5376736 | 195.7 | 1.8 | 0 | 0.3 | 0.3 | 93 | 61.12 | 3.44 | 1.93 | 0.043 | 0.034 | 1.65 | 3.96 |
| Area C | RYPC2603 | 368310 | 5376704 | 201.7 | 1.9 | 0 | 0.2 | 0.2 | 89 | 59.08 | 3.12 | 2.42 | 0.057 | 0.024 | 1.3 | 7.33 |
| Area C | RYPC2603 | 368310 | 5376704 | 201.7 | 1.9 | 0.2 | 1.1 | 0.9 | 87 | 55.8 | 5.22 | 2.27 | 0.066 | 0.019 | 1.2 | 10.18 |
| Area C | RYPC2604 | 368345 | 5376664 | 208.4 | 3.5 | 0 | 0.5 | 0.5 | 94 | 61.69 | 3.04 | 1.74 | 0.051 | 0.039 | 1.73 | 3.64 |
| Area C | RYPC2604 | 368345 | 5376664 | 208.4 | 3.5 | 0.5 | 1.8 | 1.3 | 87 | 58.27 | 3.12 | 2.1 | 0.071 | 0.027 | 1.69 | 8.13 |
| Area C | RYPC2605 | 368382 | 5376623 | 217.3 | 2.3 | 0 | 0.4 | 0.4 | 94 | 62.77 | 1.88 | 1.74 | 0.039 | 0.04 | 1.73 | 3.25 |
| Area C | RYPC2605 | 368382 | 5376623 | 217.3 | 2.3 | 0.4 | 1 | 0.6 | 86 | 54.52 | 4.36 | 2.57 | 0.073 | 0.02 | 2.4 | 10.93 |
| Area C | RYPC2606 | 368414 | 5376590 | 220.9 | 2.4 | 0 | 0.2 | 0.2 | 91 | 57.87 | 2.57 | 2.12 | 0.053 | 0.026 | 2.62 | 7.68 |
| Area C | RYPC2606 | 368414 | 5376590 | 220.9 | 2.4 | 0.2 | 1.2 | 1 | 88 | 56.51 | 2.46 | 2.25 | 0.066 | 0.022 | 2.65 | 9.75 |
| Area C | RYPC2607 | 368446 | 5376544 | 218.6 | 2 | 0 | 0.4 | 0.4 | 88 | 56.08 | 2.2 | 2.44 | 0.061 | 0.02 | 2.93 | 9.98 |
| Area C | RYPC2608 | 368485 | 5376503 | 213 | 1.4 | 0 | 0.4 | 0.4 | 90 | 58.86 | 2.48 | 2.15 | 0.056 | 0.029 | 1.84 | 7.85 |
| Area C | RYPC2609 | 368512 | 5376470 | 207.7 | 1.8 | 0 | 0.6 | 0.6 | 87 | 57.76 | 4.13 | 2.23 | 0.065 | 0.027 | 1.65 | 7.83 |
| Area C | RYPC2609 | 368512 | 5376470 | 207.7 | 1.8 | 0.6 | 1 | 0.4 | 82 | 53.21 | 5.37 | 3.14 | 0.086 | 0.016 | 1.7 | 11.98 |
| Area C | RYPC2702 | 368338 | 5376805 | 188.3 | 1.4 | 0 | 0.2 | 0.2 | 93 | 60.29 | 3.89 | 1.87 | 0.059 | 0.025 | 2.18 | 3.94 |
| Area C | RYPC2703 | 368375 | 5376760 | 199.7 | 2.3 | 0 | 0.5 | 0.5 | 94 | 56.52 | 4.15 | 2.66 | 0.063 | 0.027 | 2.39 | 7.92 |
| Area C | RYPC2703 | 368375 | 5376760 | 199.7 | 2.3 | 0.5 | 0.8 | 0.3 | 88 | 53.42 | 3.89 | 3.4 | 0.082 | 0.018 | 2.22 | 12.06 |
| Area C | RYPC2704 | 368411 | 5376723 | 207.3 | 2.2 | 0 | 0.5 | 0.5 | 91 | 61.29 | 3.08 | 2.12 | 0.048 | 0.034 | 1.66 | 3.92 |
| Area C | RYPC2705 | 368442 | 5376691 | 214.6 | 2.3 | 0 | 1 | 1 | 93 | 59.16 | 2.44 | 2.32 | 0.069 | 0.026 | 1.77 | 7.3 |

| Deposit | Pit/Hole | East m | North m | RL m | EOH m | From m | To m | Interval m | MR % | Fe % | $SiO_2$ % | $Al_2O_3$ % | S % | P % | Cr % | LOI % |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Area C | RYPC2706 | 368474 | 5376655 | 220.7 | 1.9 | 0 | 0.7 | 0.7 | 86 | 56.55 | 2.01 | 2.32 | 0.059 | 0.02 | 2.25 | 10.72 |
| Area C | RYPC2708 | 368542 | 5376582 | 218 | 2.4 | 0 | 0.8 | 0.8 | 81 | 58.19 | 4.68 | 1.89 | 0.052 | 0.026 | 2.3 | 6.07 |
| Area C | RYPC2710 | 368607 | 5376499 | 206.9 | 0.7 | 0 | 0.2 | 0.2 | 93 | 59.93 | 5.9 | 1.89 | 0.048 | 0.033 | 1.1 | 4.14 |
| Area C | RYPC2905 | 368584 | 5376838 | 209.2 | 2.8 | 0 | 0.6 | 0.6 | 91 | 61.58 | 2.87 | 1.81 | 0.058 | 0.026 | 2.01 | 3.43 |
| Area C | RYPC2905 | 368584 | 5376838 | 209.2 | 2.8 | 0.6 | 0.9 | 0.3 | 85 | 56.75 | 6.25 | 2.12 | 0.094 | 0.019 | 2.36 | 5.95 |
| Area C | RYPC2906 | 368611 | 5376812 | 220 | 2 | 0 | 0.3 | 0.3 | 89 | 58.67 | 1.86 | 2.55 | 0.048 | 0.02 | 3.08 | 6.37 |
| Area D | RYPC2907 | 368645 | 5376768 | 226 | 2.8 | 0.2 | 0.8 | 0.6 | 85 | 54.2 | 5.58 | 2.72 | 0.117 | 0.022 | 2.22 | 9.87 |
| Area D | RYPC2907 | 368645 | 5376768 | 226 | 2.8 | 0 | 0.2 | 0.2 | 94 | 61.65 | 1.43 | 2 | 0.047 | 0.035 | 2.08 | 4.56 |
| Area C | RYPC2908 | 368677 | 5376730 | 223.2 | 2.2 | 0 | 0.8 | 0.8 | 92 | 58.42 | 1.9 | 2.36 | 0.054 | 0.029 | 2.13 | 8.26 |
| Area C | RYPC2909 | 368705 | 5376702 | 217 | 2 | 0 | 0.9 | 0.9 | 93 | 59.88 | 4.04 | 1.98 | 0.068 | 0.033 | 2.13 | 4.29 |
| Area C | RYPC2909 | 368705 | 5376702 | 217 | 2 | 0.9 | 1.4 | 0.5 | 88 | 54.18 | 6.61 | 3.08 | 0.097 | 0.026 | 2.22 | 8.61 |
| Area C | RYPC2910 | 368746 | 5376670 | 205.5 | 1.8 | 0.7 | 1.6 | 0.9 | 89 | 55.66 | 6.46 | 2.74 | 0.144 | 0.028 | 1.93 | 7.36 |
| Area C | RYPC2910 | 368746 | 5376670 | 205.5 | 1.8 | 0 | 0.7 | 0.7 | 96 | 62.46 | 3.14 | 1.66 | 0.042 | 0.04 | 1.67 | 2.47 |
| Area C | RYPC2913 | 368890 | 5376512 | 211 | 2.4 | 0 | 0.2 | 0.2 | 80 | 56.91 | 6.61 | 2.27 | 0.058 | 0.017 | 1.43 | 6.87 |
| Area C | RYPC3003 | 368578 | 5377004 | 202.8 | 1.4 | 0 | 0.7 | 0.7 | 87 | 57.64 | 2.78 | 2.64 | 0.067 | 0.029 | 2.85 | 7.16 |
| Area C | RYPC3004 | 368595 | 5376971 | 203.2 | 2.7 | 1 | 1.1 | 0.1 | 85 | 57.26 | 4.79 | 2.47 | 0.083 | 0.026 | 2.94 | 5.9 |
| Area C | RYPC3004 | 368595 | 5376971 | 203.2 | 2.7 | 0 | 1 | 1 | 95 | 62.96 | 1.86 | 1.72 | 0.051 | 0.038 | 2.19 | 2.49 |
| Area C | RYPC3005 | 368632 | 5376926 | 214 | 2.2 | 0 | 0.6 | 0.6 | 88 | 59.56 | 3.59 | 2.12 | 0.061 | 0.026 | 2.85 | 4.4 |
| Area C | RYPC3006 | 368675 | 5376896 | 226.8 | 2.5 | 0 | 0.6 | 0.6 | 91 | 60.45 | 3.19 | 2.08 | 0.057 | 0.03 | 2.46 | 4.1 |
| Area C | RYPC3007 | 368715 | 5376846 | 234.7 | 2.3 | 0 | 0.9 | 0.9 | 90 | 58.81 | 3.57 | 2.3 | 0.066 | 0.03 | 2.92 | 5.14 |
| Area C | RYPC3007 | 368715 | 5376846 | 234.7 | 2.3 | 0.9 | 1.8 | 0.9 | 81 | 53.17 | 5.01 | 3.04 | 0.093 | 0.019 | 3.25 | 10.18 |
| Area C | RYPC3008 | 368739 | 5376813 | 233.4 | 2.4 | 0 | 0.2 | 0.2 | 87 | 57.65 | 6.27 | 2.17 | 0.048 | 0.026 | 2.62 | 4.33 |
| Area C | RYPC3009 | 368767 | 5376782 | 226.4 | 1.8 | 0 | 0.6 | 0.6 | 93 | 59.85 | 2.18 | 2.23 | 0.048 | 0.03 | 2.98 | 4.92 |
| Area C | RYPC3012 | 368964 | 5376553 | 220.5 | 2.6 | 0 | 0.8 | 0.8 | 91 | 61.24 | 4.47 | 1.7 | 0.043 | 0.03 | 1.59 | 3.14 |
| Area C | RYPC3101 | 368599 | 5377094 | 208.1 | 2.3 | 0 | 0.3 | 0.3 | 78 | 57.19 | 2.95 | 2.83 | 0.064 | 0.022 | 2.89 | 7.11 |
| Area C | RYPC3102 | 368633 | 5377061 | 214.1 | 2.3 | 0 | 0.6 | 0.6 | 91 | 59.33 | 3.34 | 2.53 | 0.055 | 0.027 | 3 | 4.25 |
| Area C | RYPC3103 | 368672 | 5377020 | 221.1 | 3.5 | 0 | 0.7 | 0.7 | 82 | 57.45 | 3.19 | 2.68 | 0.07 | 0.022 | 3.11 | 6.58 |
| Area C | RYPC3103 | 368672 | 5377020 | 221.1 | 3.5 | 0.7 | 3.2 | 2.5 | 78 | 55.64 | 3.27 | 3.27 | 0.098 | 0.02 | 3.38 | 7.79 |
| Area C | RYPC3104 | 368704 | 5376990 | 229.4 | 1.1 | 0 | 0.3 | 0.3 | 78 | 55.16 | 2.65 | 3.15 | 0.047 | 0.017 | 3.42 | 9.3 |
| Area C | RYPC3107 | 368972 | 5376705 | 217.5 | 2.4 | 0 | 0.4 | 0.4 | 76 | 53.07 | 5.99 | 2.93 | 0.047 | 0.017 | 3.54 | 8.63 |
| Area C | RYPC3108 | 369004 | 5376663 | 229.8 | 2.2 | 0 | 0.9 | 0.9 | 93 | 61.26 | 2.29 | 2.1 | 0.042 | 0.031 | 1.79 | 4.41 |
| Area C | RYPC3109 | 369044 | 5376633 | 232.7 | 3.3 | 0 | 0.7 | 0.7 | 90 | 59.49 | 4.34 | 1.81 | 0.048 | 0.032 | 1.99 | 4.31 |
| Area D | RYPD1002 | 368371 | 5377819 | 260 | 0.8 | 0 | 0.2 | 0.2 | 75 | 58.57 | 2.97 | 2.42 | 0.061 | 0.023 | 2.97 | 4.15 |
| Area D | RYPD1003 | 368436 | 5377745 | 263.4 | 1.6 | 0 | 0.2 | 0.2 | 81 | 53.16 | 2.82 | 3.04 | 0.071 | 0.024 | 5.11 | 9.6 |
| Area D | RYPD1004 | 368508 | 5377682 | 251.7 | 5.7 | 0 | 0.2 | 0.2 | 68 | 54.01 | 3.61 | 2.81 | 0.06 | 0.026 | 4.85 | 7.41 |
| Area D | RYPD1004 | 368508 | 5377682 | 251.7 | 5.7 | 2.3 | 3.9 | 1.6 | 76 | 55.3 | 5.71 | 2.57 | 0.076 | 0.03 | 3.66 | 5.69 |
| Area D | RYPD1005 | 368564 | 5377599 | 239 | 2 | 0 | 0.2 | 0.2 | 65 | 56.27 | 2.76 | 2.66 | 0.052 | 0.03 | 4.35 | 6.62 |
| Area D | RYPD1005 | 368564 | 5377599 | 239 | 2 | 1.1 | 1.4 | 0.3 | 74 | 60.2 | 2.55 | 2.68 | 0.056 | 0.032 | 2.16 | 4.57 |
| Area D | RYPD1009 | 368464 | 5377720 | 260.9 | 3.8 | 0 | 0.4 | 0.4 | 69 | 55.5 | 2.27 | 2.93 | 0.065 | 0.022 | 4.17 | 8.14 |
| Area D | RYPD11001 | 368543 | 5378129 | 231.6 | 1.4 | 0 | 0.4 | 0.4 | 69 | 54.03 | 5.84 | 4.34 | 0.056 | 0.022 | 2.83 | 7.31 |
| Area D | RYPD11002 | 368585 | 5378103 | 235.7 | 3 | 0 | 0.5 | 0.5 | 80 | 53.91 | 4.88 | 3.89 | 0.061 | 0.021 | 3.19 | 8.48 |
| Area D | RYPD11003 | 368615 | 5378069 | 241 | 1.9 | 0 | 0.4 | 0.4 | 76 | 54.48 | 5.73 | 3.15 | 0.077 | 0.021 | 3.02 | 7.7 |
| Area D | RYPD12001 | 368680 | 5378132 | 224.4 | 1.3 | 0 | 0.3 | 0.3 | 69 | 53.63 | 5.54 | 3.91 | 0.063 | 0.019 | 2.99 | 8.56 |
| Area D | RYPD2001 | 368447 | 5377887 | 259.4 | 2 | 0 | 0.2 | 0.2 | 79 | 56.27 | 2.07 | 2.97 | 0.059 | 0.02 | 3.89 | 7.42 |
| Area D | RYPD2005 | 368404 | 5377923 | 253.5 | 1.3 | 0 | 0.3 | 0.3 | 70 | 56.62 | 2.72 | 3.42 | 0.05 | 0.021 | 3.45 | 6.73 |
| Area D | RYPD2006 | 368474 | 5377850 | 261.6 | 1.8 | 1.2 | 1.4 | 0.2 | 65 | 53.03 | 3.34 | 4.06 | 0.124 | 0.02 | 3.56 | 10.4 |
| Area D | RYPD2006 | 368474 | 5377850 | 261.6 | 1.8 | 0 | 0.2 | 0.2 | 64 | 54.16 | 3.29 | 3.63 | 0.094 | 0.021 | 3.71 | 9.11 |
| Area D | RYPD2007 | 368504 | 5377811 | 258 | 2.3 | 0 | 0.2 | 0.2 | 75 | 54.98 | 4.28 | 2.64 | 0.07 | 0.025 | 3.92 | 7.64 |
| Area D | RYPD2007 | 368504 | 5377811 | 258 | 2.3 | 2.1 | 2.3 | 0.2 | 71 | 55.68 | 3.94 | 3.1 | 0.112 | 0.023 | 3.46 | 7.15 |
| Area D | RYPD2008 | 368536 | 5377787 | 252.9 | 2.8 | 0 | 0.2 | 0.2 | 71 | 56.92 | 2.57 | 2.93 | 0.068 | 0.024 | 3.38 | 7.06 |
| Area D | RYPD2008 | 368536 | 5377787 | 252.9 | 2.8 | 0.2 | 2.6 | 2.4 | 67 | 54.95 | 3.17 | 3.34 | 0.106 | 0.02 | 3.8 | 8.09 |
| Area D | RYPD2009 | 368578 | 5377756 | 246.3 | 3.5 | 0 | 0.2 | 0.2 | 71 | 56.57 | 2.84 | 2.66 | 0.064 | 0.028 | 3.53 | 7.3 |
| Area D | RYPD2009 | 368578 | 5377756 | 246.3 | 3.5 | 0.2 | 0.7 | 0.5 | 72 | 55.61 | 3.06 | 3.29 | 0.108 | 0.02 | 3.58 | 7.69 |
| Area D | RYPD2010 | 368614 | 5377719 | 239.7 | 1.7 | 0 | 0.3 | 0.3 | 70 | 56.5 | 2.55 | 2.74 | 0.054 | 0.024 | 3.68 | 7.47 |
| Area D | RYPD2010 | 368614 | 5377719 | 239.7 | 1.7 | 0.3 | 1.3 | 1 | 71 | 56.02 | 3.19 | 3.38 | 0.066 | 0.028 | 3.2 | 7.58 |
| Area D | RYPD2011 | 368649 | 5377696 | 239.2 | 1.1 | 0 | 0.3 | 0.3 | 69 | 55.69 | 3.29 | 4.17 | 0.047 | 0.02 | 2.06 | 8.96 |
| Area D | RYPD3001 | 368447 | 5378024 | 240.6 | 2.4 | 0 | 0.2 | 0.2 | 71 | 55.47 | 4.86 | 3.29 | 0.056 | 0.025 | 4.04 | 5.19 |
| Area D | RYPD3001 | 368447 | 5378024 | 240.6 | 2.4 | 0.2 | 1.1 | 0.9 | 70 | 56.69 | 3.55 | 3.51 | 0.085 | 0.027 | 3.59 | 5.37 |
| Area D | RYPD3001 | 368447 | 5378024 | 240.6 | 2.4 | 1.1 | 2 | 0.9 | 74 | 58.3 | 3.27 | 3 | 0.075 | 0.026 | 3.25 | 4.68 |
| Area D | RYPD3002 | 368515 | 5377964 | 250.3 | 1.5 | 0 | 0.2 | 0.2 | 85 | 57.67 | 4 | 2.44 | 0.057 | 0.029 | 3.33 | 5.22 |
| Area D | RYPD3003 | 368587 | 5377891 | 243.7 | 0.8 | 0 | 0.2 | 0.2 | 71 | 59.52 | 2.91 | 2.34 | 0.045 | 0.032 | 2.87 | 4.16 |
| Area D | RYPD3005 | 368694 | 5377782 | 240.1 | 1.4 | 0.2 | 0.7 | 0.5 | 79 | 53.42 | 11.08 | 2.4 | 0.09 | 0.021 | 2.1 | 6.03 |

| Deposit | Pit/Hole | East m | North m | RL m | EOH m | From m | To m | Interval m | MR % | Fe % | $SiO_2$ % | $Al_2O_3$ % | S % | P % | Cr % | LOI % |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Area D | RYPD3005 | 368694 | 5377782 | 240.1 | 1.4 | 0 | 0.2 | 0.2 | 93 | 62.31 | 3.74 | 1.91 | 0.036 | 0.03 | 1.97 | 1.72 |
| Area D | RYPD3007 | 368822 | 5377677 | 246.8 | 1.1 | 0 | 0.2 | 0.2 | 72 | 55.5 | 6.8 | 2.98 | 0.06 | 0.019 | 1.4 | 7.65 |
| Area D | RYPD3008 | 368375 | 5378090 | 232.4 | 1.8 | 0 | 0.4 | 0.4 | 84 | 59.83 | 1.99 | 2.44 | 0.044 | 0.021 | 3.18 | 4.48 |
| Area D | RYPD3008 | 368375 | 5378090 | 232.4 | 1.8 | 0.4 | 1.5 | 1.1 | 74 | 56.67 | 2.67 | 3.59 | 0.11 | 0.017 | 3.24 | 6.76 |
| Area D | RYPD3009 | 368400 | 5378058 | 236.7 | 2.4 | 0 | 0.2 | 0.2 | 69 | 58.65 | 2.25 | 3.15 | 0.052 | 0.022 | 3.41 | 4.76 |
| Area D | RYPD3010 | 368477 | 5377998 | 244 | 2.4 | 0 | 0.3 | 0.3 | 81 | 60.3 | 2.61 | 2.4 | 0.05 | 0.027 | 3.09 | 3.38 |
| Area D | RYPD3011 | 368542 | 5377924 | 249.7 | 1.3 | 0 | 0.2 | 0.2 | 70 | 59 | 2.72 | 2.78 | 0.045 | 0.028 | 3.49 | 4.1 |
| Area D | RYPD3012 | 368616 | 5377868 | 236.9 | 1.7 | 0 | 0.3 | 0.3 | 83 | 58.87 | 4.62 | 2.19 | 0.065 | 0.031 | 2.54 | 4.37 |
| Area D | RYPD3012 | 368616 | 5377868 | 236.9 | 1.7 | 0.3 | 0.8 | 0.5 | 74 | 55.85 | 5.24 | 3.15 | 0.098 | 0.026 | 2.69 | 6.74 |
| Area D | RYPD4001 | 368595 | 5378032 | 245.4 | 2.5 | 0 | 0.2 | 0.2 | 76 | 54.67 | 6.61 | 2.76 | 0.062 | 0.026 | 3.6 | 5.83 |
| Area D | RYPD5001 | 368582 | 5378150 | 230.5 | 1.1 | 0 | 0.2 | 0.2 | 79 | 54.26 | 7.34 | 3.48 | 0.054 | 0.026 | 3.46 | 5.28 |
| Area D | RYPD5004 | 368790 | 5377948 | 241 | 2 | 0 | 0.2 | 0.2 | 88 | 58.31 | 3.74 | 2.4 | 0.058 | 0.025 | 2.28 | 6.33 |
| Area D | RYPD5004 | 368790 | 5377948 | 241 | 2 | 0.2 | 1.5 | 1.3 | 71 | 53.85 | 4.77 | 3.55 | 0.079 | 0.022 | 2.61 | 9.88 |
| Area D | RYPD5005 | 368847 | 5377888 | 235.9 | 1.4 | 0 | 0.2 | 0.2 | 79 | 54.24 | 5.56 | 3.31 | 0.04 | 0.018 | 2.25 | 9.18 |
| Area D | RYPD5005 | 368847 | 5377888 | 235.9 | 1.4 | 0.8 | 1 | 0.2 | 76 | 53.37 | 3.02 | 3.48 | 0.078 | 0.016 | 2.95 | 11.62 |
| Area D | RYPD5009 | 368816 | 5377921 | 244.1 | 2.5 | 0 | 0.4 | 0.4 | 72 | 53.71 | 4.83 | 3.12 | 0.066 | 0.018 | 2.99 | 9.81 |
| Area D | RYPD6003 | 368442 | 5377685 | 261 | 4.6 | 1.1 | 3.8 | 2.7 | 64 | 56.82 | 2.67 | 2.72 | 0.108 | 0.022 | 3.97 | 6.37 |
| Area D | RYPD6004 | 368468 | 5377652 | 255.8 | 4.8 | 2.2 | 3.8 | 1.6 | 71 | 57.17 | 2.91 | 2.68 | 0.112 | 0.025 | 3.96 | 5.59 |
| Area D | RYPD6004 | 368468 | 5377652 | 255.8 | 4.8 | 3.8 | 4.2 | 0.4 | 64 | 55.07 | 2.5 | 3.31 | 0.122 | 0.021 | 3.6 | 9.07 |
| Area D | RYPD6004 | 368468 | 5377652 | 255.8 | 4.8 | 0 | 0.7 | 0.7 | 73 | 55.1 | 3.47 | 2.64 | 0.074 | 0.024 | 4.28 | 7.66 |
| Area D | RYPD6005 | 368506 | 5377619 | 246 | 3 | 0.9 | 1.6 | 0.7 | 65 | 58.68 | 2.1 | 2.68 | 0.07 | 0.028 | 3.16 | 5.74 |
| Area D | RYPD7002 | 368397 | 5377859 | 258.4 | 1.7 | 0 | 0.9 | 0.9 | 65 | 53.21 | 5.56 | 4.04 | 0.098 | 0.02 | 3.46 | 7.69 |
| Area D | RYPD7003 | 368444 | 5377820 | 261.9 | 2.7 | 0.6 | 1.7 | 1.1 | 71 | 53.35 | 3.61 | 3.87 | 0.099 | 0.021 | 3.69 | 9.61 |
| Area D | RYPD7003 | 368444 | 5377820 | 261.9 | 2.7 | 0 | 0.6 | 0.6 | 76 | 56.2 | 2.78 | 3.08 | 0.094 | 0.025 | 3.25 | 7.88 |
| Area D | RYPD7005 | 368507 | 5377752 | 255.8 | 2.9 | 0 | 0.2 | 0.2 | 72 | 57.32 | 2.25 | 2.61 | 0.065 | 0.026 | 3.67 | 6.67 |
| Area D | RYPD7005 | 368507 | 5377752 | 255.8 | 2.9 | 0.2 | 1 | 0.8 | 71 | 55.61 | 2.91 | 2.83 | 0.092 | 0.022 | 4.01 | 7.63 |
| Area D | RYPD7006 | 368540 | 5377716 | 248.7 | 1.9 | 0 | 0.4 | 0.4 | 67 | 57.54 | 1.93 | 2.72 | 0.049 | 0.028 | 3.86 | 6.3 |
| Area D | RYPD7006 | 368540 | 5377716 | 248.7 | 1.9 | 0.4 | 1.4 | 1 | 70 | 55.65 | 4.15 | 3.27 | 0.079 | 0.024 | 3.18 | 7.26 |
| Area D | RYPD7007 | 368572 | 5377690 | 242.6 | 4.5 | 3.1 | 4 | 0.9 | 70 | 54.85 | 4.38 | 3.91 | 0.063 | 0.026 | 3.33 | 7.36 |
| Area D | RYPD7007 | 368572 | 5377690 | 242.6 | 4.5 | 0 | 0.6 | 0.6 | 73 | 57.2 | 2.42 | 2.66 | 0.058 | 0.028 | 3.97 | 6.17 |
| Area D | RYPD8001 | 368405 | 5377991 | 245.1 | 3.2 | 0 | 0.3 | 0.3 | 73 | 57.73 | 2.14 | 3.55 | 0.047 | 0.023 | 3.38 | 5.86 |
| Area D | RYPD8001 | 368405 | 5377991 | 245.1 | 3.2 | 1.9 | 2.8 | 0.9 | 65 | 53.89 | 3.38 | 4.31 | 0.156 | 0.015 | 3.31 | 9.08 |
| Area D | RYPD8002 | 368438 | 5377953 | 251.9 | 1.3 | 0 | 0.3 | 0.3 | 66 | 53.26 | 4.17 | 4.48 | 0.08 | 0.018 | 3.65 | 8.65 |
| Area D | RYPD8002 | 368438 | 5377953 | 251.9 | 1.3 | 0.3 | 1 | 0.7 | 69 | 53.62 | 3.49 | 4.65 | 0.093 | 0.018 | 3.57 | 8.77 |
| Area D | RYPD8003 | 368470 | 5377921 | 257.5 | 2.8 | 0 | 0.3 | 0.3 | 74 | 59.5 | 2.29 | 2.53 | 0.064 | 0.027 | 3.24 | 4.35 |
| Area D | RYPD8004 | 368506 | 5377887 | 257.5 | 2.5 | 0.2 | 1.1 | 0.9 | 67 | 54.29 | 5.52 | 3.32 | 0.078 | 0.024 | 4.07 | 6.27 |
| Area D | RYPD8004 | 368506 | 5377887 | 257.5 | 2.5 | 0 | 0.2 | 0.2 | 75 | 55.48 | 4.02 | 2.66 | 0.055 | 0.025 | 3.93 | 7.09 |
| Area D | RYPD8006 | 368575 | 5377824 | 245.4 | 3.2 | 0 | 0.2 | 0.2 | 76 | 59.38 | 2.29 | 2.64 | 0.04 | 0.029 | 3.14 | 4.67 |
| Area D | RYPD8006 | 368575 | 5377824 | 245.4 | 3.2 | 0.2 | 0.5 | 0.3 | 72 | 56.92 | 3.19 | 3.23 | 0.049 | 0.026 | 3.11 | 6.67 |
| Area D | RYPD8007 | 368600 | 5377795 | 243.1 | 6.6 | 1 | 6.5 | 5.5 | 65 | 54.92 | 3.23 | 3.59 | 0.116 | 0.02 | 3.64 | 8.05 |
| Area D | RYPD8007 | 368600 | 5377795 | 243.1 | 6.6 | 0 | 0.2 | 0.2 | 72 | 58.21 | 2.01 | 2.87 | 0.05 | 0.027 | 3.14 | 6.28 |
| Area D | RYPD8007 | 368600 | 5377795 | 243.1 | 6.6 | 0.2 | 0.5 | 0.3 | 64 | 58.09 | 2.07 | 2.81 | 0.048 | 0.027 | 3.24 | 6.27 |
| Area D | RYPD8007 | 368600 | 5377795 | 243.1 | 6.6 | 0.5 | 1 | 0.5 | 67 | 57.5 | 3.85 | 2.34 | 0.061 | 0.024 | 3.19 | 5.85 |
| Area D | RYPD8008 | 368643 | 5377762 | 238 | 2 | 0.3 | 1 | 0.7 | 63 | 53.1 | 3.04 | 4.91 | 0.126 | 0.026 | 2.88 | 10.8 |
| Area D | RYPD8008 | 368643 | 5377762 | 238 | 2 | 0 | 0.3 | 0.3 | 79 | 58.6 | 1.78 | 2.59 | 0.051 | 0.029 | 3.27 | 6.05 |
| Area D | RYPD9003 | 368472 | 5378061 | 235.4 | 0.7 | 0 | 0.5 | 0.5 | 86 | 58.24 | 3.21 | 2.93 | 0.048 | 0.028 | 2.95 | 5.33 |
| Area D | RYPD9006 | 368579 | 5377975 | 248.5 | 2.2 | 0 | 0.2 | 0.2 | 74 | 56.86 | 3.72 | 2.97 | 0.067 | 0.023 | 2.74 | 7.02 |
| Area D | RYPD9006 | 368579 | 5377975 | 248.5 | 2.2 | 0.2 | 0.7 | 0.5 | 69 | 54.88 | 3.51 | 3.34 | 0.083 | 0.022 | 2.5 | 10.04 |
| Area D | RYPD9007 | 368611 | 5377934 | 239.8 | 1.3 | 0 | 0.2 | 0.2 | 81 | 58.92 | 3.23 | 2.59 | 0.044 | 0.031 | 2.83 | 4.87 |
| Area D | RYPD9007 | 368611 | 5377934 | 239.8 | 1.3 | 0.2 | 1.1 | 0.9 | 73 | 53.69 | 9.58 | 2.4 | 0.076 | 0.026 | 2.84 | 6.02 |
| Area A | RYPDENA1 | 367745 | 5377137 | 211.1 | 4 | 0 | 0.3 | 0.3 | 87 | 59.1 | 2.18 | 1.81 | 0.059 | 0.036 | 3.29 | 5.61 |
| Area C | RYPDENC2 | 368076 | 5376633 | 189.5 | 2.4 | 0 | 0.9 | 0.9 | 94 | 63.36 | 3.06 | 1.68 | 0.04 | 0.044 | 1.47 | 1.78 |
| Area D | RYPDEND1 | 368542 | 5377973 | 250.3 | 2.2 | 0.2 | 0.8 | 0.6 | 71 | 54.35 | 6.25 | 3.06 | 0.095 | 0.024 | 3.43 | 6.84 |
| Area D | RYPDEND1 | 368542 | 5377973 | 250.3 | 2.2 | 0 | 0.2 | 0.2 | 74 | 60.19 | 3.76 | 2.06 | 0.051 | 0.028 | 2.66 | 3.28 |
| Area C | RYT1_010 | 368448 | 5376836 | 192.8 | 1.1 | 0 | 0.3 | 0.3 | 80 | 55.47 | 4.45 | 3.21 | 0.065 | 0.02 | 2.28 | 8.9 |
| Area C | RYT1_020 | 368453 | 5376827 | 193.2 | 1.9 | 0 | 0.4 | 0.4 | 87 | 60.32 | 3.55 | 2.3 | 0.051 | 0.027 | 2.2 | 3.95 |
| Area C | RYT1_020 | 368453 | 5376827 | 193.2 | 1.9 | 0.4 | 0.9 | 0.5 | 77 | 53.2 | 8.88 | 3.02 | 0.121 | 0.022 | 2.67 | 7.07 |
| Area C | RYT1_030 | 368458 | 5376819 | 195 | 2 | 0 | 0.4 | 0.4 | 92 | 61.87 | 3.12 | 1.93 | 0.045 | 0.033 | 2.13 | 2.5 |
| Area C | RYT1_030 | 368458 | 5376819 | 195 | 2 | 0.4 | 0.9 | 0.5 | 81 | 58.64 | 5.24 | 2.34 | 0.072 | 0.029 | 2.25 | 4.35 |
| Area C | RYT1_040 | 368465 | 5376813 | 197.3 | 2.1 | 0.3 | 1.6 | 1.3 | 80 | 53.86 | 7.06 | 3.17 | 0.12 | 0.024 | 2.84 | 7.35 |
| Area C | RYT1_040 | 368465 | 5376813 | 197.3 | 2.1 | 0 | 0.3 | 0.3 | 93 | 62.13 | 2.29 | 1.79 | 0.044 | 0.031 | 2.05 | 3.28 |
| Area C | RYT1_050 | 368472 | 5376803 | 199.9 | 3 | 0.2 | 2.3 | 2.1 | 82 | 55.67 | 6.48 | 2.64 | 0.08 | 0.028 | 2.84 | 6.19 |

| Deposit | Pit/Hole | East m | North m | RL m | EOH m | From m | To m | Interval m | MR % | Fe % | $SiO_2$ % | $Al_2O_3$ % | S % | P % | Cr % | LOI % |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Area C | RYT1_050 | 368472 | 5376803 | 199.9 | 3 | 0 | 0.2 | 0.2 | 92 | 62.88 | 2.16 | 1.68 | 0.038 | 0.033 | 2.02 | 2.2 |
| Area C | RYT1_060 | 368476 | 5376795 | 201.8 | 4 | 0 | 0.9 | 0.9 | 94 | 63.39 | 1.71 | 1.83 | 0.04 | 0.036 | 1.99 | 2.19 |
| Area C | RYT1_070 | 368481 | 5376786 | 204.1 | 4.4 | 0 | 1.4 | 1.4 | 95 | 63.45 | 1.71 | 1.78 | 0.041 | 0.037 | 2.02 | 1.96 |
| Area C | RYT1_070 | 368481 | 5376786 | 204.1 | 4.4 | 1.4 | 3.2 | 1.8 | 82 | 55.67 | 5.26 | 2.47 | 0.113 | 0.027 | 2.83 | 7.15 |
| Area C | RYT1_080 | 368486 | 5376779 | 205.7 | 3 | 0 | 0.2 | 0.2 | 94 | 63.89 | 1.63 | 1.68 | 0.04 | 0.037 | 1.97 | 1.9 |
| Area C | RYT1_090 | 368490 | 5376771 | 207.4 | 2.6 | 0 | 0.2 | 0.2 | 91 | 62.51 | 2.52 | 1.74 | 0.043 | 0.036 | 2.02 | 2.53 |
| Area C | RYT1_100 | 368497 | 5376764 | 209.2 | 2.1 | 0 | 0.7 | 0.7 | 94 | 63.14 | 1.63 | 1.79 | 0.047 | 0.039 | 1.94 | 2.77 |
| Area C | RYT1_110 | 368504 | 5376757 | 211.6 | 2.8 | 0 | 0.6 | 0.6 | 94 | 62.5 | 1.82 | 1.91 | 0.04 | 0.036 | 2.07 | 2.9 |
| Area C | RYT1_116 | 368506 | 5376752 | 213.1 | 2.5 | 0.3 | 1.9 | 1.6 | 85 | 54.18 | 6.52 | 2.93 | 0.119 | 0.022 | 2.64 | 8.18 |
| Area C | RYT1_116 | 368506 | 5376752 | 213.1 | 2.5 | 0 | 0.3 | 0.3 | 90 | 59.7 | 2.78 | 2.27 | 0.05 | 0.032 | 2.36 | 5.16 |
| Area C | RYT1_130 | 368514 | 5376741 | 215.2 | 2.3 | 0 | 1 | 1 | 93 | 61.8 | 1.39 | 1.96 | 0.049 | 0.038 | 1.91 | 4.56 |
| Area C | RYT1_140 | 368520 | 5376735 | 216.1 | 2.8 | 0 | 0.2 | 0.2 | 94 | 62.93 | 1.26 | 1.91 | 0.044 | 0.044 | 1.72 | 3.4 |
| Area C | RYT1_150 | 368529 | 5376731 | 217.1 | 2.6 | 0 | 0.4 | 0.4 | 93 | 63.16 | 1.41 | 1.78 | 0.043 | 0.041 | 1.74 | 3.05 |
| Area C | RYT1_155 | 368532 | 5376729 | 217.6 | 2.8 | 0 | 1.2 | 1.2 | 94 | 64.03 | 1.07 | 1.7 | 0.039 | 0.042 | 1.73 | 2.41 |
| Area C | RYT1_160 | 368537 | 5376728 | 217.8 | 1.8 | 0 | 1 | 1 | 90 | 61.69 | 1.43 | 2.02 | 0.059 | 0.037 | 2.04 | 4.49 |
| Area C | RYT1_165 | 368543 | 5376725 | 218.6 | 3.3 | 0 | 2 | 2 | 89 | 62.63 | 1.35 | 1.79 | 0.045 | 0.038 | 1.97 | 3.29 |
| Area C | RYT1_165 | 368543 | 5376725 | 218.6 | 3.3 | 2 | 2.8 | 0.8 | 81 | 53.62 | 4.02 | 2.63 | 0.09 | 0.011 | 2.35 | 12.29 |
| Area C | RYT1_170 | 368546 | 5376720 | 219.7 | 2.7 | 0 | 0.5 | 0.5 | 82 | 58.2 | 2.12 | 2.46 | 0.063 | 0.028 | 2.38 | 7.85 |
| Area C | RYT1_175 | 368549 | 5376717 | 220.3 | 2.4 | 0 | 0.3 | 0.3 | 90 | 61.22 | 1.5 | 1.98 | 0.042 | 0.035 | 2.17 | 4.82 |
| Area C | RYT1_180 | 368552 | 5376713 | 221 | 1.7 | 0 | 0.2 | 0.2 | 86 | 59.97 | 1.78 | 2.08 | 0.051 | 0.029 | 2.36 | 5.86 |
| Area C | RYT1_185 | 368555 | 5376709 | 222.6 | 1.1 | 0 | 0.2 | 0.2 | 80 | 56.92 | 2.07 | 2.44 | 0.056 | 0.022 | 2.44 | 9.7 |
| Area C | RYT1_190 | 368558 | 5376705 | 223.6 | 1.6 | 0 | 0.5 | 0.5 | 90 | 60.31 | 1.24 | 1.95 | 0.066 | 0.031 | 2.27 | 6.33 |
| Area C | RYT1_195 | 368561 | 5376700 | 224.1 | 2.3 | 0 | 0.3 | 0.3 | 90 | 61.54 | 1.37 | 1.79 | 0.05 | 0.032 | 2.32 | 4.66 |
| Area C | RYT1_200 | 368562 | 5376695 | 224.9 | 2.7 | 0 | 0.5 | 0.5 | 95 | 62.37 | 1.22 | 1.7 | 0.032 | 0.036 | 2.21 | 3.47 |
| Area C | RYT1_210 | 368566 | 5376687 | 225.8 | 3.2 | 0 | 1 | 1 | 91 | 59.3 | 2.74 | 2.02 | 0.038 | 0.027 | 2.67 | 5.44 |
| Area C | RYT1_220 | 368571 | 5376679 | 226.4 | 1.4 | 0 | 0.2 | 0.2 | 87 | 58.72 | 2.35 | 2.25 | 0.043 | 0.03 | 2.56 | 7.1 |
| Area C | RYT1_240 | 368587 | 5376668 | 226.2 | 2.8 | 0.2 | 0.8 | 0.6 | 77 | 56.14 | 3.96 | 2.55 | 0.065 | 0.027 | 2.45 | 8.55 |
| Area C | RYT1_240 | 368587 | 5376668 | 226.2 | 2.8 | 0 | 0.2 | 0.2 | 87 | 58.72 | 3.34 | 2.17 | 0.053 | 0.031 | 2.31 | 6.39 |
| Area C | RYT1_260 | 368604 | 5376657 | 225.9 | 2.1 | 0 | 0.3 | 0.3 | 90 | 59.83 | 3.06 | 1.95 | 0.042 | 0.031 | 2.01 | 4.74 |
| Area C | RYT1_270 | 368610 | 5376648 | 224.7 | 1 | 0 | 0.3 | 0.3 | 89 | 59.84 | 3.38 | 2.17 | 0.05 | 0.032 | 1.66 | 5.19 |
| Area C | RYT1_280 | 368615 | 5376641 | 223.5 | 2.9 | 0 | 0.5 | 0.5 | 90 | 60.55 | 3.21 | 2.06 | 0.044 | 0.032 | 1.68 | 4.98 |
| Area C | RYT1_290 | 368622 | 5376633 | 221.8 | 3.1 | 0 | 1.4 | 1.4 | 88 | 59.32 | 3.23 | 2.02 | 0.052 | 0.032 | 1.57 | 6.01 |
| Area C | RYT1_300 | 368628 | 5376626 | 220.4 | 2.7 | 0 | 0.5 | 0.5 | 93 | 62.17 | 2.72 | 1.66 | 0.041 | 0.04 | 1.42 | 3.06 |
| Area C | RYT1_310 | 368633 | 5376618 | 218.2 | 1.8 | 0.4 | 1.1 | 0.7 | 76 | 55.4 | 6.31 | 2.55 | 0.097 | 0.026 | 1.94 | 8.39 |
| Area C | RYT1_310 | 368633 | 5376618 | 218.2 | 1.8 | 0 | 0.4 | 0.4 | 88 | 56.66 | 6.4 | 2.06 | 0.045 | 0.034 | 1.95 | 6.1 |
| Area C | RYT1_320 | 368639 | 5376609 | 217 | 1.8 | 0 | 0.2 | 0.2 | 85 | 53.48 | 7.76 | 2.34 | 0.067 | 0.029 | 2.69 | 7.55 |
| Area C | RYT1_330 | 368644 | 5376601 | 214.2 | 1.9 | 0 | 0.3 | 0.3 | 86 | 54.72 | 7.61 | 2.19 | 0.052 | 0.031 | 2.26 | 6.94 |
| Area C | RYT1_340 | 368649 | 5376593 | 213.5 | 3.6 | 0 | 0.6 | 0.6 | 90 | 61.05 | 3.53 | 1.85 | 0.047 | 0.038 | 1.66 | 3.32 |
| Area C | RYT1_350 | 368655 | 5376585 | 212.2 | 2.7 | 0 | 0.1 | 0.1 | 83 | 55.45 | 7.17 | 2.29 | 0.054 | 0.032 | 2.25 | 7.08 |
| Area C | RYT1_360 | 368664 | 5376580 | 210.5 | 2.1 | 0 | 0.3 | 0.3 | 91 | 57.93 | 5.24 | 2.13 | 0.05 | 0.037 | 1.62 | 5.65 |
| Area C | RYT1_370 | 368671 | 5376574 | 209.4 | 1.8 | 0 | 0.6 | 0.6 | 91 | 59.32 | 3.51 | 2.21 | 0.045 | 0.038 | 1.43 | 6.06 |
| Area C | RYT1_380 | 368679 | 5376567 | 207.5 | 1.8 | 0 | 1.5 | 1.5 | 91 | 62.38 | 3.06 | 1.96 | 0.044 | 0.041 | 1.55 | 2.94 |
| Area C | RYT1_386 | 368682 | 5376561 | 206.5 | 1.6 | 0 | 1.1 | 1.1 | 86 | 60.5 | 3.91 | 1.83 | 0.042 | 0.035 | 1.35 | 4.28 |
| Area C | RYT2_000 | 368182 | 5376707 | 190.8 | 1 | 0 | 0.5 | 0.5 | 89 | 57.35 | 4.77 | 2.46 | 0.059 | 0.025 | 2.36 | 6.44 |
| Area C | RYT2_000 | 368182 | 5376707 | 190.8 | 1 | 0.5 | 0.9 | 0.4 | 75 | 55.86 | 4.79 | 2.95 | 0.095 | 0.02 | 2.02 | 8.17 |
| Area C | RYT2_020 | 368195 | 5376693 | 193.3 | 1.4 | 0 | 0.3 | 0.3 | 84 | 56.97 | 3.91 | 2.93 | 0.068 | 0.022 | 2.49 | 7.05 |
| Area C | RYT2_040 | 368207 | 5376676 | 195 | 0.9 | 0 | 0.3 | 0.3 | 80 | 59.83 | 5.18 | 2.36 | 0.048 | 0.026 | 1.83 | 3.77 |
| Area C | RYT2_050 | 368213 | 5376669 | 195.6 | 1.4 | 0 | 0.5 | 0.5 | 86 | 57.3 | 3.89 | 2.83 | 0.082 | 0.024 | 1.56 | 8.32 |
| Area C | RYT2_060 | 368219 | 5376661 | 196.7 | 1.1 | 0 | 0.2 | 0.2 | 79 | 53.48 | 6.18 | 3.48 | 0.096 | 0.018 | 1.91 | 10.22 |
| Area C | RYT2_060 | 368219 | 5376661 | 196.7 | 1.1 | 0.2 | 0.4 | 0.2 | 82 | 57.51 | 4.51 | 2.64 | 0.072 | 0.026 | 1.68 | 7.43 |
| Area C | RYT2_070 | 368225 | 5376653 | 197.3 | 2 | 0 | 0.7 | 0.7 | 93 | 61.64 | 2.42 | 1.78 | 0.05 | 0.034 | 1.27 | 4.79 |
| Area C | RYT2_080 | 368232 | 5376646 | 198.2 | 2.1 | 0 | 0.6 | 0.6 | 95 | 64.33 | 1.69 | 1.49 | 0.046 | 0.042 | 1.28 | 2.54 |
| Area C | RYT2_080 | 368232 | 5376646 | 198.2 | 2.1 | 0.6 | 1.3 | 0.7 | 85 | 56.16 | 6.35 | 2.02 | 0.101 | 0.024 | 2.13 | 7.5 |
| Area C | RYT2_090 | 368237 | 5376637 | 199.7 | 2 | 0 | 0.9 | 0.9 | 96 | 63.79 | 1.56 | 1.59 | 0.045 | 0.039 | 1.35 | 2.81 |
| Area C | RYT2_090 | 368237 | 5376637 | 199.7 | 2 | 0.9 | 1.4 | 0.5 | 88 | 56.71 | 3.1 | 2.27 | 0.087 | 0.019 | 1.18 | 10.87 |
| Area C | RYT2_100 | 368242 | 5376629 | 200.6 | 1.4 | 0 | 0.3 | 0.3 | 85 | 57.18 | 2.16 | 2.85 | 0.088 | 0.022 | 1.25 | 10.2 |
| Area C | RYT2_110 | 368250 | 5376623 | 201.5 | 2.4 | 0 | 0.9 | 0.9 | 89 | 57.08 | 3.47 | 2.46 | 0.072 | 0.025 | 1.39 | 9.7 |
| Area C | RYT2_120 | 368258 | 5376617 | 202.4 | 1.6 | 0 | 0.3 | 0.3 | 81 | 53.18 | 5.54 | 2.91 | 0.079 | 0.017 | 2.01 | 11.93 |
| Area C | RYT2_130 | 368265 | 5376611 | 203.2 | 2.4 | 0 | 0.7 | 0.7 | 91 | 55.45 | 5.58 | 2.44 | 0.074 | 0.021 | 1.98 | 8.96 |
| Area C | RYT2_140 | 368271 | 5376602 | 204 | 2.6 | 0 | 0.9 | 0.9 | 92 | 60.69 | 3.94 | 1.78 | 0.056 | 0.032 | 1.99 | 4.02 |
| Area C | RYT2_150 | 368276 | 5376594 | 204.9 | 2.4 | 0 | 0.3 | 0.3 | 89 | 55.33 | 4.32 | 2.91 | 0.08 | 0.022 | 1.72 | 10.51 |
| Area C | RYT2_160 | 368282 | 5376586 | 205.3 | 2.5 | 0 | 0.6 | 0.6 | 85 | 56.95 | 3.85 | 2.61 | 0.058 | 0.024 | 1.78 | 8.48 |

| Deposit | Pit/Hole | East m | North m | RL m | EOH m | From m | To m | Interval m | MR % | Fe % | $SiO_2$ % | $Al_2O_3$ % | S % | P % | Cr % | LOI % |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Area C | RYT2_170 | 368288 | 5376578 | 205.5 | 3 | 0 | 1.2 | 1.2 | 82 | 55.76 | 3.94 | 2.53 | 0.063 | 0.02 | 1.94 | 10.17 |
| Area C | RYT2_180 | 368293 | 5376569 | 205.7 | 1.7 | 0 | 0.4 | 0.4 | 92 | 57.97 | 4.6 | 2.17 | 0.048 | 0.021 | 2.02 | 6.29 |
| Area C | RYT2_190 | 368299 | 5376562 | 206 | 2.2 | 0 | 0.6 | 0.6 | 87 | 58.36 | 3.53 | 2.23 | 0.068 | 0.028 | 1.71 | 7.4 |
| Area C | RYT2_190 | 368299 | 5376562 | 206 | 2.2 | 0.6 | 1.1 | 0.5 | 82 | 53.11 | 4.9 | 2.64 | 0.107 | 0.006 | 1.62 | 13.47 |
| Area C | RYT2_200 | 368306 | 5376554 | 206.4 | 3.2 | 0 | 0.4 | 0.4 | 88 | 58.31 | 3.23 | 2.36 | 0.05 | 0.033 | 2.38 | 6.77 |
| Area C | RYT2_210 | 368312 | 5376547 | 206.4 | 2.2 | 0 | 0.8 | 0.8 | 93 | 56.98 | 4.92 | 2.25 | 0.062 | 0.031 | 2.41 | 6.56 |
| Area C | RYT2_215 | 368316 | 5376544 | 206.3 | 2.6 | 0 | 0.7 | 0.7 | 93 | 61.1 | 3.12 | 1.87 | 0.044 | 0.036 | 1.83 | 4.41 |
| Area C | RYT2_220 | 368319 | 5376540 | 206 | 1.7 | 0 | 0.6 | 0.6 | 91 | 58.81 | 2.87 | 2.29 | 0.06 | 0.028 | 1.79 | 7.29 |
| Area C | RYT2_225 | 368323 | 5376537 | 205.9 | 2.3 | 0 | 0.3 | 0.3 | 87 | 57.86 | 3.1 | 2.46 | 0.061 | 0.028 | 1.89 | 7.79 |
| Area C | RYT2_230 | 368327 | 5376534 | 205.5 | 1.8 | 0 | 0.5 | 0.5 | 92 | 56.04 | 5.26 | 2.63 | 0.07 | 0.026 | 2.05 | 7.96 |
| Area C | RYT2_235 | 368331 | 5376530 | 205.1 | 2.1 | 0.5 | 1.8 | 1.3 | 78 | 53.01 | 6.42 | 2.59 | 0.109 | 0.015 | 2.01 | 11.18 |
| Area C | RYT2_240 | 368335 | 5376527 | 204.9 | 2 | 0 | 0.5 | 0.5 | 92 | 57.41 | 3.79 | 2.32 | 0.06 | 0.03 | 1.73 | 8.32 |
| Area C | RYT2_245 | 368338 | 5376524 | 204.6 | 1.7 | 0 | 0.2 | 0.2 | 89 | 59.36 | 3.89 | 2.08 | 0.052 | 0.031 | 1.68 | 6.17 |
| Area C | RYT2_250 | 368342 | 5376521 | 204.1 | 2.1 | 0 | 1 | 1 | 94 | 62.63 | 2.42 | 1.66 | 0.046 | 0.043 | 1.84 | 2.84 |
| Area C | RYT2_255 | 368346 | 5376518 | 204.4 | 2.6 | 0 | 1.7 | 1.7 | 93 | 62.36 | 2.33 | 1.74 | 0.048 | 0.038 | 1.73 | 3.71 |
| Area C | RYT2_260 | 368349 | 5376514 | 204 | 2.4 | 0 | 1.3 | 1.3 | 94 | 61.02 | 3.51 | 1.72 | 0.062 | 0.039 | 1.58 | 4.44 |
| Area C | RYT2_270 | 368354 | 5376505 | 203.5 | 2.7 | 0 | 1.9 | 1.9 | 98 | 64.19 | 1.73 | 1.4 | 0.036 | 0.044 | 1.63 | 1.77 |
| Area C | RYT2_280 | 368360 | 5376497 | 203.3 | 2.2 | 0 | 0.9 | 0.9 | 95 | 63.24 | 2.01 | 1.64 | 0.048 | 0.043 | 1.55 | 2.73 |
| Area C | RYT2_290 | 368367 | 5376491 | 203.6 | 3.6 | 0 | 1.7 | 1.7 | 94 | 63.86 | 1.56 | 1.57 | 0.049 | 0.04 | 1.3 | 2.76 |
| Area C | RYT2_300 | 368374 | 5376483 | 202.9 | 3.4 | 0 | 1.2 | 1.2 | 96 | 63.06 | 2.42 | 1.59 | 0.04 | 0.045 | 1.74 | 2.26 |
| Area C | RYT2_310 | 368380 | 5376476 | 202.9 | 2.8 | 0 | 1.2 | 1.2 | 95 | 62.66 | 2.46 | 1.61 | 0.046 | 0.038 | 1.69 | 2.72 |
| Area C | RYT2_320 | 368387 | 5376468 | 203 | 1.9 | 0 | 0.5 | 0.5 | 90 | 59.78 | 5.07 | 1.78 | 0.056 | 0.033 | 2.07 | 3.63 |
| Area C | RYT2_330 | 368393 | 5376461 | 202.7 | 1.9 | 0 | 0.5 | 0.5 | 94 | 63.74 | 1.65 | 1.62 | 0.037 | 0.041 | 1.81 | 2.49 |
| Area C | RYT2_340 | 368399 | 5376452 | 201.5 | 3 | 0 | 2.2 | 2.2 | 94 | 62.91 | 2.61 | 1.59 | 0.044 | 0.04 | 1.75 | 2.35 |
| Area C | RYT2_340 | 368399 | 5376452 | 201.5 | 3 | 2.2 | 2.8 | 0.6 | 88 | 53.26 | 10.89 | 2.06 | 0.088 | 0.023 | 2.98 | 5.46 |
| Area C | RYT2_360 | 368406 | 5376434 | 198.8 | 2.6 | 0 | 0.9 | 0.9 | 96 | 62.73 | 2.44 | 1.34 | 0.038 | 0.033 | 1.71 | 2.89 |
| Area C | RYT2_370 | 368409 | 5376425 | 197.6 | 2 | 0 | 0.5 | 0.5 | 89 | 62.15 | 3.72 | 1.62 | 0.04 | 0.033 | 1.63 | 2.87 |
| Area C | RYT2_380 | 368414 | 5376417 | 196.9 | 2 | 0 | 0.2 | 0.2 | 93 | 61.01 | 4.75 | 1.61 | 0.051 | 0.034 | 1.85 | 3.16 |
| Area C | RYT2_390 | 368421 | 5376410 | 196.6 | 1.7 | 0 | 0.3 | 0.3 | 91 | 58.79 | 5.71 | 1.83 | 0.053 | 0.034 | 1.91 | 4.17 |
| Area C | RYT2_400 | 368428 | 5376403 | 196.4 | 1.9 | 0 | 0.2 | 0.2 | 93 | 61.09 | 4.26 | 1.66 | 0.044 | 0.032 | 1.69 | 3.11 |
| Area C | RYT2_410 | 368437 | 5376398 | 196.6 | 1.5 | 0 | 0.4 | 0.4 | 92 | 60.48 | 4.77 | 1.55 | 0.045 | 0.031 | 1.73 | 2.8 |
| Area C | RYT2_415 | 368441 | 5376396 | 196.7 | 1.9 | 0 | 0.2 | 0.2 | 85 | 56.6 | 6.87 | 1.89 | 0.057 | 0.031 | 1.92 | 6.05 |
| Area A | RYT3_000 | 367466 | 5377112 | 192.5 | 1.8 | 0 | 0.3 | 0.3 | 89 | 56.99 | 1.84 | 2.49 | 0.056 | 0.031 | 2.57 | 8.68 |
| Area A | RYT3_010 | 367473 | 5377105 | 193.3 | 3 | 0 | 0.2 | 0.2 | 91 | 60.74 | 1.84 | 1.74 | 0.046 | 0.038 | 2.27 | 4.78 |
| Area A | RYT3_020 | 367480 | 5377098 | 193.8 | 2.4 | 0 | 0.4 | 0.4 | 90 | 58.75 | 2.52 | 2.08 | 0.045 | 0.036 | 2.62 | 6.12 |
| Area A | RYT3_030 | 367488 | 5377092 | 193.4 | 1.3 | 0 | 0.2 | 0.2 | 87 | 58.51 | 2.99 | 2.17 | 0.049 | 0.035 | 2.61 | 6.2 |
| Area A | RYT3_040 | 367495 | 5377086 | 193.6 | 1.8 | 0 | 0.3 | 0.3 | 93 | 59.44 | 2.25 | 2.23 | 0.062 | 0.038 | 2.12 | 6.68 |
| Area A | RYT3_050 | 367503 | 5377080 | 193.5 | 2.3 | 0 | 0.8 | 0.8 | 95 | 62.84 | 1.22 | 1.85 | 0.045 | 0.044 | 1.7 | 3.33 |
| Area A | RYT3_060 | 367511 | 5377073 | 193.9 | 1.8 | 0 | 0.4 | 0.4 | 95 | 61.21 | 1.82 | 2.08 | 0.051 | 0.043 | 1.68 | 4.6 |
| Area A | RYT3_070 | 367518 | 5377066 | 194.2 | 2 | 0 | 0.7 | 0.7 | 92 | 62.06 | 2.59 | 1.93 | 0.048 | 0.041 | 1.67 | 3.77 |
| Area A | RYT3_080 | 367525 | 5377059 | 194.6 | 1.9 | 0.7 | 1.3 | 0.6 | 82 | 53.71 | 3.87 | 3.51 | 0.137 | 0.017 | 2.7 | 10.93 |
| Area A | RYT3_080 | 367525 | 5377059 | 194.6 | 1.9 | 0 | 0.7 | 0.7 | 94 | 62.07 | 1.82 | 2.25 | 0.043 | 0.044 | 1.89 | 3.5 |
| Area A | RYT3_090 | 367532 | 5377052 | 194.8 | 1.5 | 0 | 0.3 | 0.3 | 92 | 61.27 | 2.22 | 2.4 | 0.049 | 0.041 | 2.04 | 4.27 |
| Area A | RYT3_090 | 367532 | 5377052 | 194.8 | 1.5 | 0.3 | 0.6 | 0.3 | 82 | 54.49 | 4.06 | 3.91 | 0.11 | 0.025 | 2.42 | 9.5 |
| Area A | RYT3_100 | 367538 | 5377044 | 194.7 | 2 | 0 | 0.3 | 0.3 | 93 | 62.29 | 2.01 | 1.81 | 0.043 | 0.045 | 2.24 | 2.71 |
| Area A | RYT3_100 | 367538 | 5377044 | 194.7 | 2 | 0.3 | 1.5 | 1.2 | 84 | 53.14 | 6.8 | 2.85 | 0.096 | 0.028 | 3.46 | 7.63 |
| Area A | RYT3_110 | 367542 | 5377035 | 194.4 | 1.4 | 0.2 | 0.6 | 0.4 | 83 | 56.61 | 3.06 | 2.8 | 0.088 | 0.032 | 2.45 | 8.02 |
| Area A | RYT3_110 | 367542 | 5377035 | 194.4 | 1.4 | 0 | 0.2 | 0.2 | 91 | 59.99 | 2.46 | 2.13 | 0.049 | 0.037 | 2.37 | 4.58 |
| Area A | RYT3_130 | 367554 | 5377021 | 193.3 | 4 | 1 | 3.8 | 2.8 | 83 | 55.31 | 5.56 | 2.95 | 0.074 | 0.035 | 2.95 | 6.13 |
| Area A | RYT3_130 | 367554 | 5377021 | 193.3 | 4 | 0 | 1 | 1 | 94 | 61.29 | 2.1 | 2 | 0.043 | 0.042 | 2.53 | 3.37 |
| Area A | RYT3_140 | 367560 | 5377013 | 193.5 | 2.6 | 0 | 0.9 | 0.9 | 93 | 61.81 | 2.03 | 1.81 | 0.046 | 0.041 | 2.5 | 3.29 |
| Area A | RYT3_140 | 367560 | 5377013 | 193.5 | 2.6 | 0.9 | 2 | 1.1 | 85 | 55.14 | 5.97 | 2.93 | 0.098 | 0.033 | 3.33 | 6.24 |
| Area A | RYT3_140 | 367560 | 5377013 | 193.5 | 2.6 | 2 | 2.3 | 0.3 | 82 | 57.64 | 2.27 | 3.25 | 0.098 | 0.026 | 3.32 | 6.3 |
| Area A | RYT3_145 | 367564 | 5377010 | 193.4 | 2.3 | 0 | 0.7 | 0.7 | 94 | 63.25 | 1.37 | 1.91 | 0.047 | 0.044 | 2.34 | 2.06 |
| Area A | RYT3_145 | 367564 | 5377010 | 193.4 | 2.3 | 0.7 | 1.8 | 1.1 | 83 | 54.5 | 6.89 | 2.83 | 0.117 | 0.03 | 3.32 | 6 |
| Area A | RYT3_150 | 367568 | 5377007 | 193.6 | 1.9 | 0 | 0.3 | 0.3 | 94 | 62.28 | 1.43 | 2.04 | 0.049 | 0.049 | 2.31 | 2.83 |
| Area A | RYT3_155 | 367571 | 5377003 | 193.4 | 1.9 | 0 | 0.6 | 0.6 | 94 | 63.43 | 1.22 | 1.89 | 0.045 | 0.048 | 2.24 | 2.22 |
| Area A | RYT3_160 | 367575 | 5377000 | 193.5 | 3 | 0 | 1 | 1 | 95 | 62.77 | 1.58 | 1.98 | 0.047 | 0.046 | 2.18 | 2.39 |
| Area A | RYT3_165 | 367579 | 5376997 | 193.4 | 3 | 0 | 1 | 1 | 94 | 63.09 | 1.65 | 1.76 | 0.046 | 0.044 | 2.23 | 1.98 |
| Area A | RYT3_170 | 367583 | 5376994 | 193.1 | 3.8 | 0 | 1.5 | 1.5 | 95 | 63.37 | 1.73 | 1.74 | 0.051 | 0.045 | 2.2 | 1.93 |
| Area A | RYT3_175 | 367586 | 5376990 | 192.9 | 2 | 0 | 0.6 | 0.6 | 90 | 60.61 | 2.59 | 2.13 | 0.068 | 0.042 | 2.5 | 3.8 |
| Area A | RYT3_180 | 367590 | 5376986 | 192.6 | 1.2 | 0 | 0.7 | 0.7 | 83 | 55.56 | 3.23 | 2.87 | 0.061 | 0.026 | 3.15 | 7.69 |

| Deposit | Pit/Hole | East m | North m | RL m | EOH m | From m | To m | Interval m | MR % | Fe % | $SiO_2$ % | $Al_2O_3$ % | S % | P % | Cr % | LOI % |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Area A | RYT3_185 | 367592 | 5376982 | 192.1 | 0.9 | 0 | 0.3 | 0.3 | 82 | 54.61 | 4.11 | 3.02 | 0.056 | 0.021 | 3.23 | 8.33 |
| Area A | RYT3_200 | 367602 | 5376971 | 191.8 | 1.4 | 0.4 | 0.7 | 0.3 | 77 | 53.94 | 7.55 | 2.68 | 0.103 | 0.028 | 3.03 | 6.71 |
| Area A | RYT3_210 | 367609 | 5376964 | 190.8 | 1.7 | 0 | 0.4 | 0.4 | 90 | 59.77 | 3.72 | 2.06 | 0.053 | 0.041 | 2.18 | 3.91 |
| Area A | RYT3_220 | 367616 | 5376956 | 189.7 | 3 | 0.9 | 2.9 | 2 | 81 | 59.98 | 4.21 | 1.96 | 0.041 | 0.043 | 2.17 | 3.32 |
| Area A | RYT3_220 | 367616 | 5376956 | 189.7 | 3 | 0 | 0.9 | 0.9 | 82 | 63.81 | 1.5 | 1.72 | 0.042 | 0.05 | 1.86 | 2.07 |
| Area A | RYT3_230 | 367622 | 5376949 | 188.7 | 2.1 | 0 | 0.6 | 0.6 | 94 | 64.12 | 1.33 | 1.66 | 0.038 | 0.049 | 1.92 | 1.88 |
| Area A | RYT3_230 | 367622 | 5376949 | 188.7 | 2.1 | 0.6 | 1.3 | 0.7 | 84 | 53.3 | 8.88 | 2.85 | 0.091 | 0.029 | 3.14 | 6.26 |
| Area A | RYT3_240 | 367628 | 5376941 | 187.9 | 1.4 | 0 | 0.6 | 0.6 | 93 | 62.84 | 2.2 | 1.74 | 0.051 | 0.041 | 2.05 | 2.5 |
| Area A | RYT3_240 | 367628 | 5376941 | 187.9 | 1.4 | 0.6 | 1 | 0.4 | 84 | 57.66 | 4.96 | 2.36 | 0.119 | 0.033 | 2.84 | 5.19 |
| Area A | RYT3_250 | 367634 | 5376933 | 187.6 | 1.7 | 0 | 0.8 | 0.8 | 87 | 58.72 | 3.49 | 2.68 | 0.058 | 0.035 | 2 | 5.82 |
| Area A | RYT3_270 | 367647 | 5376919 | 188.2 | 1.3 | 0 | 0.2 | 0.2 | 87 | 60.77 | 4.04 | 1.95 | 0.048 | 0.034 | 2.15 | 3.08 |
| Area A | RYT3_280 | 367657 | 5376916 | 187.7 | 1.6 | 0 | 0.3 | 0.3 | 94 | 61.6 | 2.74 | 1.96 | 0.047 | 0.04 | 1.85 | 3.56 |
| Area A | RYT3_290 | 367666 | 5376913 | 185.9 | 1.4 | 0 | 0.3 | 0.3 | 90 | 59.51 | 4.09 | 2.29 | 0.05 | 0.039 | 1.94 | 4.3 |
| Area A | RYT3_300 | 367675 | 5376908 | 185.3 | 1 | 0 | 0.3 | 0.3 | 80 | 55.49 | 4.09 | 3.19 | 0.078 | 0.031 | 1.84 | 8.86 |
| Area A | RYT3_310 | 367683 | 5376903 | 184.2 | 1.8 | 0 | 0.7 | 0.7 | 85 | 59.95 | 3.87 | 2.25 | 0.051 | 0.04 | 1.74 | 4.23 |
| Area A | RYT3_320 | 367692 | 5376897 | 183 | 2.1 | 0.9 | 1.5 | 0.6 | 83 | 53.62 | 5.6 | 3.29 | 0.128 | 0.03 | 2.16 | 9.31 |
| Area A | RYT3_320 | 367692 | 5376897 | 183 | 2.1 | 0 | 0.9 | 0.9 | 93 | 61.97 | 3.23 | 1.83 | 0.044 | 0.043 | 1.74 | 2.59 |
| Area A | RYT4_000 | 367822 | 5377181 | 211.6 | 2.8 | 0 | 0.3 | 0.3 | 89 | 62.55 | 1.56 | 1.64 | 0.037 | 0.036 | 2.4 | 2.91 |
| Area A | RYT4_010 | 367828 | 5377174 | 214.1 | 3.4 | 0 | 0.6 | 0.6 | 82 | 53.33 | 3.55 | 3.12 | 0.117 | 0.014 | 2.75 | 12.23 |
| Area A | RYT4_020 | 367834 | 5377167 | 216.6 | 5 | 0 | 0.6 | 0.6 | 85 | 60.6 | 2.5 | 1.76 | 0.056 | 0.037 | 2.34 | 4.59 |
| Area A | RYT4_030 | 367841 | 5377159 | 218.2 | 4.7 | 0 | 0.8 | 0.8 | 84 | 61.53 | 2.35 | 1.72 | 0.052 | 0.038 | 2.34 | 3.46 |
| Area A | RYT4_030 | 367841 | 5377159 | 218.2 | 4.7 | 0.8 | 2.7 | 1.9 | 83 | 53.59 | 2.35 | 2.76 | 0.113 | 0.022 | 3.23 | 12.3 |
| Area A | RYT4_040 | 367847 | 5377151 | 219.6 | 3.2 | 0 | 0.5 | 0.5 | 88 | 61 | 1.52 | 1.87 | 0.047 | 0.036 | 2.4 | 4.96 |
| Area A | RYT4_040 | 367847 | 5377151 | 219.6 | 3.2 | 0.5 | 2.3 | 1.8 | 84 | 53.21 | 2.05 | 3.44 | 0.088 | 0.012 | 2.51 | 13.64 |
| Area A | RYT4_050 | 367853 | 5377143 | 220.5 | 3 | 0 | 0.4 | 0.4 | 91 | 61.34 | 2.1 | 1.72 | 0.048 | 0.038 | 2.26 | 4.26 |
| Area A | RYT4_050 | 367853 | 5377143 | 220.5 | 3 | 0.4 | 2.3 | 1.9 | 82 | 53.75 | 2.27 | 3.44 | 0.087 | 0.013 | 2.31 | 13.12 |
| Area A | RYT4_055 | 367856 | 5377139 | 220.9 | 3.3 | 0 | 0.2 | 0.2 | 92 | 62.76 | 1.54 | 1.47 | 0.035 | 0.039 | 2.26 | 2.98 |
| Area A | RYT4_060 | 367857 | 5377134 | 221.2 | 1.7 | 0 | 0.5 | 0.5 | 92 | 62.59 | 1.37 | 1.42 | 0.035 | 0.039 | 2.43 | 3.11 |
| Area A | RYT4_074 | 367863 | 5377122 | 222 | 2.9 | 0 | 0.3 | 0.3 | 91 | 62.41 | 1.22 | 1.45 | 0.038 | 0.04 | 2.49 | 3.39 |
| Area A | RYT4_074 | 367863 | 5377122 | 222 | 2.9 | 0.3 | 1.6 | 1.3 | 75 | 53.91 | 1.99 | 2.29 | 0.103 | 0.018 | 3.1 | 13.13 |
| Area A | RYT4_080 | 367867 | 5377117 | 222.8 | 4.4 | 0 | 0.6 | 0.6 | 90 | 61.02 | 1.82 | 1.61 | 0.037 | 0.034 | 2.41 | 4.73 |
| Area A | RYT4_080 | 367867 | 5377117 | 222.8 | 4.4 | 0.6 | 1.4 | 0.8 | 85 | 54.38 | 2.22 | 2.38 | 0.089 | 0.012 | 2.58 | 12.69 |
| Area A | RYT4_085 | 367870 | 5377113 | 222.8 | 4.2 | 0 | 0.3 | 0.3 | 87 | 59.88 | 1.35 | 1.93 | 0.059 | 0.041 | 2.54 | 6.54 |
| Area A | RYT4_090 | 367874 | 5377110 | 222.9 | 3.5 | 0 | 0.3 | 0.3 | 88 | 59.79 | 1.75 | 1.59 | 0.045 | 0.036 | 3.01 | 5.64 |
| Area A | RYT4_095 | 367878 | 5377108 | 222.9 | 3.9 | 0 | 0.3 | 0.3 | 90 | 59.8 | 1.26 | 1.42 | 0.045 | 0.037 | 3.35 | 5.59 |
| Area A | RYT4_100 | 367882 | 5377105 | 223.1 | 2.7 | 0 | 0.7 | 0.7 | 89 | 61.53 | 1.48 | 1.76 | 0.035 | 0.04 | 2.65 | 3.6 |
| Area A | RYT4_105 | 367887 | 5377103 | 223.1 | 2.9 | 0 | 0.4 | 0.4 | 89 | 60.46 | 1.86 | 1.81 | 0.04 | 0.038 | 2.88 | 4.57 |
| Area A | RYT4_105 | 367887 | 5377103 | 223.1 | 2.9 | 0.4 | 1.6 | 1.2 | 84 | 55.64 | 3.36 | 1.89 | 0.149 | 0.023 | 2.89 | 9.98 |
| Area A | RYT4_110 | 367890 | 5377099 | 222.8 | 3.3 | 0 | 0.4 | 0.4 | 89 | 62.01 | 1.65 | 1.74 | 0.038 | 0.039 | 2.48 | 3.31 |
| Area A | RYT4_115 | 367894 | 5377095 | 222.6 | 3.7 | 0 | 2.6 | 2.6 | 88 | 62.7 | 1.54 | 1.59 | 0.041 | 0.043 | 2.22 | 2.66 |
| Area A | RYT4_120 | 367897 | 5377092 | 222.6 | 3.8 | 0 | 0.6 | 0.6 | 93 | 63.55 | 1.26 | 1.51 | 0.035 | 0.044 | 1.99 | 2.29 |
| Area A | RYT4_134 | 367906 | 5377082 | 222.9 | 4 | 0 | 1.2 | 1.2 | 94 | 62.81 | 1.26 | 1.59 | 0.036 | 0.043 | 2.08 | 3.23 |
| Area A | RYT4_140 | 367911 | 5377078 | 223.1 | 3.4 | 0 | 1.1 | 1.1 | 94 | 62.73 | 1.13 | 1.59 | 0.041 | 0.041 | 2.11 | 3.57 |
| Area A | RYT4_150 | 367919 | 5377073 | 223.3 | 3 | 0 | 0.2 | 0.2 | 87 | 59.75 | 3.53 | 1.66 | 0.049 | 0.035 | 2.21 | 5.23 |
| Area A | RYT4_160 | 367924 | 5377065 | 220.7 | 1.5 | 0 | 0.2 | 0.2 | 82 | 55.77 | 4.15 | 2.76 | 0.057 | 0.028 | 3.01 | 7.88 |
| Area A | RYT4_260 | 367993 | 5377001 | 205.7 | 0.8 | 0 | 0.5 | 0.5 | 75 | 55.15 | 4.53 | 2.78 | 0.038 | 0.035 | 3.26 | 7.39 |
| Area A | RYT4_300 | 368018 | 5376973 | 200.8 | 0.9 | 0 | 0.4 | 0.4 | 79 | 54.83 | 5.93 | 2.76 | 0.041 | 0.023 | 2.73 | 7.62 |
| Area A | RYT4_310 | 368021 | 5376963 | 199.4 | 1 | 0 | 0.4 | 0.4 | 86 | 57.38 | 3.17 | 2.49 | 0.046 | 0.023 | 2.4 | 7.11 |
| Area A | RYT4_330 | 368034 | 5376949 | 197.6 | 1.2 | 0 | 0.4 | 0.4 | 78 | 56.4 | 5.07 | 2.64 | 0.052 | 0.03 | 2.47 | 6.11 |
| Area A | RYT4_350 | 368054 | 5376948 | 198.4 | 1.4 | 0 | 0.4 | 0.4 | 82 | 59.41 | 3.7 | 2 | 0.046 | 0.04 | 2.33 | 4.3 |
| Area A | RYT4_360 | 368061 | 5376946 | 198.2 | 1.3 | 0 | 1.2 | 1.2 | 83 | 58.42 | 3.66 | 2.44 | 0.052 | 0.035 | 2.49 | 5.41 |

Yours sincerely



Andrew Radonjic
**Managing Director**

The information in this report that relates to Exploration Results, Exploration Targets and Minerals Resources is based on information compiled by Mr Andrew Radonjic, a fulltime employee of the company and who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Andrew Radonjic has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Andrew Radonjic consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

The information in this report that relates to Ore Reserves is based on information compiled by Mr Denis Grubic, who is a Member of the Australasian Institute of Mining and Metallurgy. Mr Grubic is an independent consultant. Mr Grubic qualifies as a Competent Person as defined in the 2004 and 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Grubic consents to the inclusion in the report of the matters based on his information in the form and context in which it appears. This information was prepared and first disclosed under the JORC Code 2004. It has not been updated since to comply with the JORC Code 2012 on the basis that the information has not materially changed since it was last reported.

**Notes:** All material assumptions and technical parameters underpinning the Minerals Resource and Reserve estimate referred to within previous ASX announcements continue to apply and have not materially changed list last reported. The company is not aware of any new information or data that materially affects the information included in the said announcement.

For personal use only

For personal use only

## APPENDIX ONE

### Section 1 Sampling Techniques and Data

*(Criteria in this section apply to all succeeding sections)*

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| Sampling techniques | • Nature and quality of sampling (e.g.: cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.<br>• Measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.<br>• Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g.: 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g.: submarine nodules) may warrant disclosure of detailed information. | • The Riley Direct Shipping Ore ("DSO") deposits are surficial lateritic iron deposits and highly amenable to evaluation through the use of test pitting and trenching. Lateritic gravel and clays were free dig, and the cemented laterite zone was usually broken up with a ripper after excavation of the lateritic gravel zone.<br>• Some 540 test pits of c. 2 m by 2 m dimension were excavated by 20 t excavator to an average depth of c. 2.4 m, and four trenches for a combined length of 1,491 m were excavated across the Riley DSO deposits. The pits and trenches were excavated though the laterite profile to end in smooth clays or basement serpentinite and metasedimentary rocks. Test pitting and trenching are in this situation considered superior to drilling because they allow the geologist to make a better assessment of lithology and there was no observed loss of fines.<br>• To assist with geological modelling of the thin laterite profile in areas A and C some 585 power auger holes were drilled on 25 m spacings between the test pits and trenches to the base of the upper lateritic gravel zone.<br>• Lithological representative samples of c. 10 kg each were collected from vertical channels and/or spoils from the test pits and trenches by suitably qualified Venture Minerals geologist and field technicians and submitted to commercial assay laboratories for preparation, screening and assay. Spoils of lateritic gravel from some 80 auger holes in areas where the test pitting indicated significant iron grade variation were also assayed. |
| Drilling techniques | • Drill type (e.g.: core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc..) and details (e.g.: core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc..). | • Pitting and trenching was conducted by 20 t mechanical excavator. A ripper was used where necessary for indurated materials.<br>• Auger drilling of the unconsolidated gravel layer was conducted with a Stihl Model BT121 100 mm man-portable power auger with extension bar. |
| Drill sample recovery | • Method of recording and assessing core and chip sample recoveries and results assessed.<br>• Measures taken to maximise sample recovery and ensure representative nature of the samples.<br>• Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. | • The test pits and trenches were dry, and recovery was complete. |
| Logging | • Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.<br>• Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.<br>• The total length and percentage of the relevant intersections logged. | • All test pits and trench profiles were qualitatively geologically logged and photographed by a suitably qualified Venture Minerals geologist, then marked up into discrete lithological units for assay sampling on a lithological basis. The lithological boundaries marked up along the trench faces were picked up by surveyor every 2.5 m.<br>• A total of 540 test pits of average depth 2.4 m and 1,491 m of trenches were geologically logged and sampled for assay.<br>• Some 585 power auger holes were logged and lateritic gravel spoils from 80 submitted for assay. |
| Sub-sampling techniques and sample preparation | • If core, whether cut or sawn and whether quarter, half or all core taken.<br>• If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.<br>• For all sample types, the nature, quality and appropriateness of the sample preparation technique. | • The pits and trenches were geologically mapped and marked up for sampling. Approx. 10 kg of each lithology was sampled in a continuous vertical channel from each pit and 10 m spacings from the trenches using a pick or pneumatic hammer according to induration. If the pit or trench was unsafe to enter the sample was collected from the appropriate spoil piles (different lithologies were stockpiled separately) by using a clean trowel in a series of small scoops. |

For personal use only

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| | • Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.<br>• Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.<br>• Whether sample sizes are appropriate to the grain size of the material being sampled. | • Sampling intervals were lithological and ranged from 0.1 to 5.6 m (average 0.69 m) thickness and the samples were collected into calico bags for submission to commercial assay laboratory.<br>• The test pit/trench channel and spoil samples and auger spoil samples were submitted in their entirety to the commercial assay laboratory.<br>• Duplicate channel or spoil samples were collected on an average of one per 25 pit/trench samples to evaluate sampling bias (discussed further below).<br>• Auger sampling was limited to the surficial gravel layer. |
| Quality of assay data and laboratory tests | • The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.<br>• For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.<br>• Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. | • All samples from areas A and C were submitted to Bureau Veritas, Perth for preparation and assay procedure, and all pitting samples from areas D and power auger samples from Areas A and C were submitted to ALS in Burnie for the preparation procedure and then transferred to ALS in Perth for assay. The preparation procedure for all samples comprised drying at 105 °C, then crush to 100 % passing 10 mm, then dry screened at 1 mm to produce >1mm and <1mm fractions. Weight proportions of the two fractions were determined (Mass Recovery) and both >1mm and <1mm fractions were assayed by XRF on fused glass beads using a lithium metaborate flux for Fe, Si, Al, K, Na, Mg, Ca, Ti, P, S, Ni, Cr, LOI and a broad suite of trace elements. The head grade of the sample was back calculated from the grade of the >1 mm and <1 mm size fractions and the mass percentages (i.e.: calculated head = mass weighted average of >1mm and <1mm fractions).<br>• Commercial assay standards produced by Geostats Pty Ltd, Perth were inserted at a rate of 1 per 10 assay samples. Results for key elements Fe, Si, Al, P and Cr were within 10% and generally 5% of the reference values. At low levels (<0.03%) S tended to report with poorer precision and slightly high (positive) bias.<br>• Field duplicates comprised a second sample taken using the method as the primary sample. An average of one field duplicate per 25 primary samples were collected and submitted for assay. The duplicate sample was submitted in the same batch as the primary sample. The field duplicates indicate low sampling variance for Fe, $Al_2O_3$, P, Cr and mass recovery. $SiO_2$ shows a slightly higher variability, most likely due to the somewhat patchy occurrence of quartz silt within the Riley laterite. Blanks were not used.<br>• Six laboratory duplicates were also assayed at ALS. The duplicate was made at the preparation laboratory by taking a 1 kg riffle split off the original 10 to 15 kg sample before the dry, crush and screen procedure. These laboratory duplicates allow evaluation of preparation error and indicate low sampling variance for Fe, SiO2, Al2O3, P, Cr and mass recovery. |
| Verification of sampling and assaying | • The verification of significant intersections by either independent or alternative company personnel.<br>• The use of twinned holes.<br>• Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.<br>• Discuss any adjustment to assay data. | • Results of test pits conducted in separate campaigns are compatible.<br>• Duplicate channel sampling was conducted in an average of one out of 25 test pits as described above. Twinned test pits and trenches were not considered necessary.<br>• Data was collected, received and stored in industry standard ways.<br>• There was no adjustment to the assay data supplied by the laboratories. |
| Location of data points | • Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.<br>• Specification of the grid system used.<br>• Quality and adequacy of topographic control. | • 98% of test pits, all trenches and all power auger holes used in the resource estimate were surveyed in MGA Zone 55 GDA94 by licensed surveyors using a combination of differential GPS and total station survey systems. The remaining 2% of pits were surveyed by Venture personnel with handheld GPS units and are considered accurate within 3-5 m (1-2x the plan dimensions of the test pits). |
| Data spacing and distribution | • Data spacing for reporting of Exploration Results.<br>• Whether the data spacing and distribution is sufficient to establish the degree of geological | • Some 540 test pits were excavated on a 50 m by 50 m grid over Riley laterite areas A, C and D to an average depth of 2.4 m.<br>• Four trenches approx. 400 m apart for a combined length of 1,491 m were excavated across the entire widths of Riley laterite |

| Criteria | JORC Code explanation | Commentary |
|---|---|---|
| | and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.<br>• Whether sample compositing has been applied. | Areas A and C. The trenches were vertically channel sampled with an average 10 m spacing between channels (for a total of 173 channels).<br>• Some 585 power auger holes were drilled to the base of the upper lateritic gravel zone on 25 m spacings between the test pits and the trench section lines across Riley DSO Areas A and C to better define the depth end geometry of the gravel layer. The main purpose of the auger drilling was to better define the thickness and geometry of the topmost lateritic gravel zone, but some 80 of the auger hole spoils were also assayed in areas where the broader spaced test pitting indicated significant iron grade variation.<br>• The data spacing and distribution is considered sufficient to allow estimation of surficial lateritic DSO resources as summarised below. |
| Orientation of data in relation to geological structure | • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.<br>• If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. | • The Riley lateritic iron deposits consist of a thin (average 2.4 m, locally up to c. 6 m) surficial veneer on SW trending ridges flanking the Wilson River Ultramafic Complex.<br>• The laterite is thickest on the ridge crests and largely eroded from the intervening valleys.<br>• Test pitting was conducted on a regular grid perpendicular to the trend of the ridges, and trenching was conducted perpendicular to the trend of ridges to maximise control on laterite profile geometry and therefore volume and potentially grade. |
| Sample security | • The measures taken to ensure sample security. | • Sample collection, storage and dispatch to the assay laboratories was conducted by Venture Minerals personnel. Sample numbers were unique and did not include any locational information useful to non-Venture personnel. The level of security is considered appropriate for this style of deposit. |
| Audits or reviews | • The results of any audits or reviews of sampling techniques and data. | • The results agree with the observed materials, bulk sampling and metallurgical testwork subsequently conducted by Venture Minerals. |

## Section 2 Reporting of Exploration Results

*(Criteria listed in the preceding section also apply to this section)*

| Criteria | Explanation | Commentary |
|---|---|---|
| Mineral tenement and land tenure status | • Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.<br>• The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. | • The Riley DSO deposits are entirely located within granted Mining Lease 5M/2012 held by Venture Iron Pty Ltd a wholly owned subsidiary of Venture Minerals Ltd. The Mining Lease remains in good standing.<br>• Mining operations commenced on the 28th May 2014 and then where suspended shortly thereafter with the Mine put on Care & Maintenance due to falling commodity prices. Venture Minerals is in the process of reviewing the potential restart of the mining operations and is positioned to recommence operations within a very short period of time. |
| Exploration done by other parties | • Acknowledgment and appraisal of exploration by other parties. | • The Riley laterite deposits were first investigated and locally mined for detrital osmiridium (an alloy of Os and Ir) in the first half of the 20th Century. Area B was the extensively mined for osmiridium. Lateritic Ni and Co mineralisation was identified in the Riley Creek area by the Aberfoyle Tin Development Partnership in the late 1960s, then in the 1985-1990 period Callina NL identified and established a small detrital chromite resource within the laterites at Riley Creek. |
| Geology | • Deposit type, geological setting and style of mineralisation. | • The Early Cambrian Wilson River Ultramafic Complex of western Tasmania is extensively covered with a veneer of residual and colluvial lateritic soil and gravel, and in a few areas such as Riley Creek on the south western flank of Serpentine Ridge, the ferruginous laterite deposits reach a few metres thickness and iron grade is sufficient to produce a DSO product. Four significant iron laterite deposits are recognized at Riley Creek, namely Areas A, B, C and D, covering a combined area of c. |

For personal use only

For personal use only

| Criteria | Explanation | Commentary |
|---|---|---|
| | | 3 km². The cemented laterite and lateritic gravel reach up to 4 m combined thickness, and average thickness of the modelled deposits is c. 1.5 m. The laterite deposits are thickest on the ridges, and Areas A and C are the most significant of the four identified deposits. The clay dominated Area B covering the flanks of Riley Creek between Areas A and C does not have enough laterite to include in this resource estimate.<br>• A complete section through the laterite deposits consists of a surficial layer of lateritic gravel (RLG), underlain by a zone of cemented lateritic gravel (RLC)), then ferruginous clay (RCLY) with a variable amount of dispersed ferruginous gravel, minor lenses of lateritic gravel and locally lenses of quartz-rich sand, then greenish and cream clays and finally serpentinite basement. In some locations ferruginous gravel directly overlies clay or, around the margins of the deposits, serpentinite and metasedimentary basement. Sedimentary structures indicate the laterites are essentially colluvial and alluvial deposits most likely derived by the erosion of a once thicker veneer of laterite covering Serpentine Ridge. |
| Drill hole Information | • A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:<br>- easting and northing of the drill hole collar<br>- elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar<br>- dip and azimuth of the hole<br>- down hole length and interception depth<br>- hole length.<br>• If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. | • Relevant test pit locations and assays are given in Table Three and shown on Figure Two. |
| Data aggregation methods | • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.<br>• Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.<br>• The assumptions used for any reporting of metal equivalent values should be clearly stated. | • The results given in Table Three have not been aggregated.<br>• High grades have not been cut. |
| Relationship between mineralisation widths and intercept lengths | • These relationships are particularly important in the reporting of Exploration Results.<br>• If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.<br>• If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known'). | • Channel sampling of the pits and trenches and the auger sampling was perpendicular to the laterite profile and the thicknesses given in Table Three are essentially true. |
| Diagrams | • Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. | • Appropriate maps are included in the body of this report. |

| Criteria | Explanation | Commentary |
|---|---|---|
| Balanced reporting | • Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practised, to avoid misleading reporting of Exploration Results. | • The resource estimation takes into account all available pit, trench and auger assay data for the Riley laterite deposits. |
| Other substantive exploration data | • Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. | • AAM was engaged by Venture Minerals to conduct a LiDAR survey over the Riley area in 2011 to produce a DTM with vertical accuracy of better than 30 cm suitable for resource estimation work.<br>• Bulk sampling for metallurgical testwork has been conducted (see section 3)<br>• Hydrological drilling and modelling has been conducted.<br>• Geological logging of the pits, trenches and auger drilling has been used to construct a 3D geological model in Micromine suitable to constrain resource modelling. |
| Further work | • The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).<br>• Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. | • The Riley DSO deposits have been delineated to a stage where, subject to prevailing iron ore pricing, it is considered that mining can proceed.<br>• An appropriate map (Figure Two) of the deposits is included in the body of this report.<br>• No further exploration is planned at this stage. |

## Section 3 Estimation and Reporting of Mineral Resources

*(Criteria listed in the preceding sections also apply to this section)*

| Criteria | Explanation | Commentary |
|---|---|---|
| Database integrity | • Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes.<br>• Data validation procedures used. | • Geological, survey and assay data were collected digitally in industry standard ways, stored in an MS Access database and validated using Micromine mining software. |
| Site visits | • Comment on any site visits undertaken by the Competent Person and the outcome of those visits.<br>• If no site visits have been undertaken indicate why this is the case. | • The Competent Persons have been to site and confirm the sampling methods used and geological logging were appropriate, and the resource modelling is compatible with the observed geology. |
| Geological interpretation | • Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit.<br>• Nature of the data used and of any assumptions made.<br>• The effect, if any, of alternative interpretations on Mineral Resource estimation.<br>• The use of geology in guiding and controlling Mineral Resource estimation.<br>• The factors affecting continuity both of grade and geology. | • Test pit, trench and auger logging, surface geological mapping, assaying, and a DTM generated from the LiDAR spot height data were used to create a 3D geological model for resource estimation in Micromine.<br>• Wireframes to constrain the block modelling were created for Areas A, C and D by digitising strings onto the c. 50 m spaced pit and trench sections. The wireframes were restricted to laterite with better than 50 % Fe in the +1 mm size fraction and divided into high grade surficial gravel RLG and lower grade cemented laterite RLC zones. Peripheral ferruginous gravelly clay zones with +1 mm mass recovery of >75% and +1 mm size fraction >50% Fe were included in the adjacent RLG and RLC wireframes for Areas A and C, and gravelly clay zones with +1 mm mass recovery of >63% and +1 mm size fraction >50% Fe were included in the RLG wireframe for Area D. The 25 m spaced auger drilling was used to better constrain the boundary between RLG and RLC wireframes. |
| Dimensions | • The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource. | • The resource wireframes for Areas A and C cover a combined area of c. 1100 m by 1200 m (130 ha), and the wireframes for Area D cover c. 300 m by 600 m (18 ha). An appropriate map is included in the body of this report. |

For personal use only

For personal use only

| Criteria | Explanation | Commentary |
|---|---|---|
| | | • Maximum combined thickness (= depth from ground surface) of the RLG and RLC zones is 4 m, and average combined thickness within the resource area is c. 1.5 m. The ferruginous clay zone RCLY is up to 15 m thick (= depth from ground surface), although very little RCLY was included in the wireframes because it generally failed to meet the recoverable +1 mm size fraction criteria (see above). |
| Estimation and modelling techniques | • The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.<br>• The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.<br>• The assumptions made regarding recovery of by-products.<br>• Estimation of deleterious elements or other non-grade variables of economic significance (e.g. sulphur for acid mine drainage characterisation).<br>• In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.<br>• Any assumptions behind modelling of selective mining units.<br>• Any assumptions about correlation between variables.<br>• Description of how the geological interpretation was used to control the resource estimates.<br>• Discussion of basis for using or not using grade cutting or capping.<br>• The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available. | • There have been no previous iron ore resource estimates for the Riley laterite deposits, and no previous iron ore production.<br>• Wireframing, statistical evaluation and geostatistical modelling and 3D block modelling have been carried out by Venture personnel using Micromine software.<br>• Summary statistics and grade distribution histograms were examined for all estimated elements according to rock type, and correlations between Fe, Al, Si, S, P and Cr. Generally, the RLG is higher in Fe and lower in contaminants than the RLC and RCLY lithologies.<br>• Some 128 samples (60 RLG, 60 RLC and 8 RCLY) were re-screened wet and the resulting >1 mm and <1 mm fractions assayed. Wet screening resulted in a slight reduction in Mass Recovery (MR) for the >1mm fraction and improved Fe grade mainly through reduction of Si and Cr. Al, S, P and LOI show no marked difference between dry and wet screening. Regression formulae were calculated in MS Excel for Fe, Al, Si, S, P, Cr, MR and LOI and applied to convert the dry screened assay dataset to a wet screened basis (as for the proposed beneficiation plant) for the resource estimation.<br>• Assay sample lengths ranged from 0.1 m and 5.6 m according to lithology (median 0.5 m) and the assays were composited 0.3 m intervals for the resource estimation using the Micromine weighted average compositing function. Composites were flagged according to lithological domain.<br>• Variography was conducted according to lithology and omnidirectional variograms have consistent ranges of 150 m to 175 m for areas A and C. The variograms for Area D, which is smaller and contains less data points, are slightly less consistent but show long ranges. Similar ranges were obtained from directional variograms and are higher than the average sample spacing for the Riley deposit by a factor of 3 to 4. Please refer to this as a justification for Indicated status in the resource classification section. The directional variograms generally showed too few data points for a meaningful interpretation and consequently the Inverse Distance Weighting to the power of two (ID2) was selected over Kriging for the current data set.<br>• A block model for was created with blocks of 25m x 25m x 1m and trimmed to the RLG and RLC lithological wireframes using 5 x 5 x 0.25m sub blocking. Lithological domains were assigned to the blocks from the RLG and RLC wireframes. The +1mm size fraction (beneficiated) Fe, Al, Si, S, P, Cr, MR and LOI and in situ Fe, Al, Si, S, P, Cr and LOI were estimated to the blocks by ID2. Dips, strikes and ranges for the initial search ellipses were determined from geological features and the search ellipse oriented parallel to the strike of the laterite bodies. Seven progressively more relaxed searches were performed until all blocks were assigned a grade. Four sectors were used in each search ellipse, with a maximum of ten points per sector. Boundaries between the six domains were hard. To account for the strong influence of the topography on this thin surficial laterite deposit, a flattening function relative to the ground surface was applied in Micromine for the estimation. Upper cuts were not considered necessary and not applied to the grade estimations.<br>• Density, as determined from 7 test pits, was assigned to the block model according to lithological domain (2.48 t/m$^3$ for RLG and 2.56 t/m$^3$ for RLC). |

| Criteria | Explanation | Commentary |
|---|---|---|
| | | • The resource presented here represents material recoverable through a wash and wet screen beneficiation process at c. 1 mm. Mass Recovery is the weight % of the in-situ material retained after beneficiation and a block factor of % mass recovery >1 mm/100 was applied to each block for the reporting process.<br>• No by-products have been estimated or assumed. |
| Moisture | • Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content. | • Tonnages were estimated on a dry basis. |
| Cut-off parameters | • The basis of the adopted cut-off grade(s) or quality parameters applied. | • Wireframing restricted the model to +50% Fe beneficiated grade, and a lower cut-off of 53% Fe has been selected to obtain what is currently considered a marketable 57% Fe DSO product. |
| Mining factors or assumptions | • Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made. | • Venture Minerals proposes to extract DSO in the form of hematite and maghemite from the Riley laterite deposits.<br>• It is proposed that the near surface lateritic ore will be extracted by free dig mining in panels, crushed and wet screened on site, then screened ore will be trucked or trucked and railed to the port of Burnie for export at a rate of c. 1 Mt per annum. |
| Metallurgical factors or assumptions | • The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made. | • The proposed wet screening is an industry standard process as used in commercial gravel washing plants. The process consists of the following unit steps: Run of Mine (ROM) loading; Primary jaw crushing; Primary washing step; Secondary crushing; Wet screening to produce final product and <1mm fines; Dewatering of <1mm fines; Water recovery storage and distribution; Dewatered fines transported for rehabilitation.<br>• Beneficiated (recoverable by the above process) resources are presented in this report. |
| Environmental factors or assumptions | • Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfield project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made. | • The Riley DSO deposits are within granted Mining Lease 5M/2012.<br>• Mining permits have been obtained.<br>• Environmental permitting for the proposed lateritic DSO mining operation has been obtained. |
| Bulk density | • Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples.<br>• The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit.<br>• Discuss assumptions for bulk density estimates used in the evaluation process of the different materials. | • Seven test pits were excavated within the resource area to determine dry density (by volume and weight) of the lateritic materials and an average dry density of 2.48 t/m$^3$ has been assigned to the gravels and 2.56 t/m$^3$ to the cemented laterite part of the resource block model. |

For personal use only

| Criteria | Explanation | Commentary |
|---|---|---|
| Classification | • The basis for the classification of the Mineral Resources into varying confidence categories.<br>• Whether appropriate account has been taken of all relevant factors (i.e. relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data).<br>• Whether the result appropriately reflects the Competent Person's view of the deposit. | • The Riley DSO resource is classified as Indicated in accordance with the Australasian Code for the Reporting of Identified Mineral Resources and Reserves (JORC Code 2012).<br>• The classification is based the surficial nature and well-established geological model, availability of high quality test pit and trenching information through the entire extent and depth of the resource, sample spacing and number of estimation runs. Some 99.9% of the blocks in the models were estimated within the first 4 estimation runs, effectively resulting in a search ellipse with a 100 x 100 x 2m search radius. |
| Audits or reviews | • The results of any audits or reviews of Mineral Resource estimates. | • The modelling and resource estimation were reviewed by appropriate Venture personnel |
| Discussion of relative accuracy / confidence | • Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate.<br>• The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.<br>• These statements of relative accuracy and confidence of the estimate should be compared with production data, where available. | • Riley DSO is a pre-mining resource, there is no production data.<br>• Block model grades and grade contours were plotted and compared with sample point data and contour plans created from the sample point data to verify the distribution and variability of Fe grades and contaminants.<br>• Venture conducted trial grade control of 52 RLG blocks. The sampling was conducted by man portable power auger to blade refusal on a 10m x 10m grid. Maximum end of auger hole depth was 1 m, and the average was c. 0.5 m. One sample of the RLG was collected from each hole representing the entire auger depth. Some 283 samples were collected and submitted to commercial assay laboratory SGS Renison for XRF assay on fused glass beads (SGS method XRF78S). The samples were not beneficiated as, for ease and speed of sample preparation and assaying, it was only intended to verify the in-situ mining schedule grades. Comparison with the In-situ block model grades suggests slight positive reconciliation from the auger grade control exercise (c. +1.8% Fe, or c. 3% upgrade from the schedule block grade). |

For personal use only